

Free Warranty Extended


Register your product for a **FREE** upgrade to a 24-Month Warranty:

<https://tobenone.com/warranty>

THANK YOU!

Thank you for purchase of Tobenone USB C dual 4K@60Hz Dock UDS-030! Our dock provides the ability to connect up to two 4K@60Hz displays, RJ45 Gigabit Ethernet, audio input and output, 8 USB peripherals and SD/TF slot to your USB C laptop via one USB C cable.

Ports and connectors

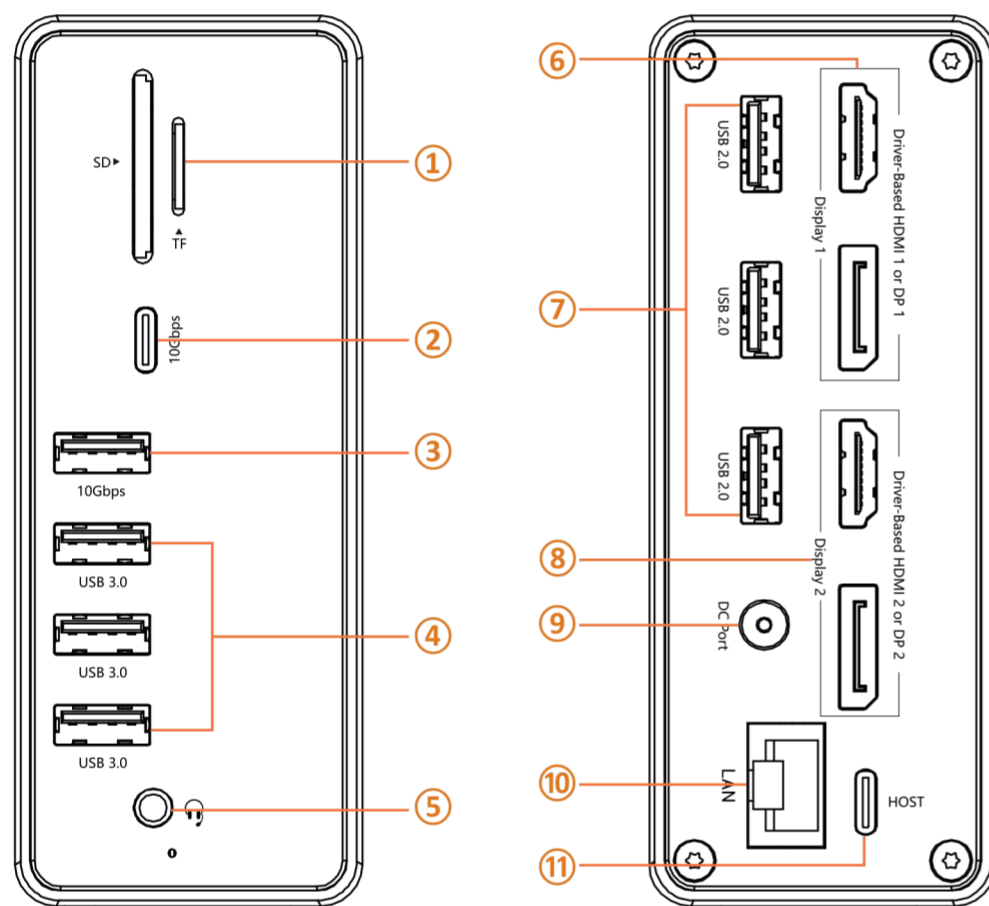

- ① SD/TF: Support simultaneous reading
- ② USB C 3.1: Speed up to 10Gbps
- ③ USB A 3.1: Speed up to 10Gbps
- ④ USB A 3.0: Speed up to 5Gbps
- ⑤ 3.5mm Audio/Microphone
- ⑥ Display 1: HDMI 1 or DP 1 resolution up to 4K@60Hz(driver-based)
- ⑦ USB A 2.0: Special for wireless devices
- ⑧ Display 2: HDMI 2 or DP 2 resolution up to 4K@60Hz(driver-based)
- ⑨ DC Port: Connect the 65W power supply
- ⑩ LAN Port: Speed up to 1000Mbps
- ⑪ HOST Port: Connect to the laptop

Before connect the dock, please install the driver by visting:

<https://www.synatics.com/products/displaylink-graphics>

Step 1: Connect the 65W power supply to the dock's DC Power input port (⑨)

Step 2: Use USB C cable coming with the dock to connect the dock and laptop via HOST port (⑪)

If your laptop does not equip with a USB C port, you can connect our dock to the USB3.0 Port of your laptop via the USB C to USB A cable. Note: If you connect the dock to the USB C port that does not support charging or the USB 3.0 of your laptop, please connect your laptop power supply to your laptop for charging.

Step 3: Connect two monitors via HDM 1 or DP 1 Port (⑥)and HDMI 2 or DP 2 Port(⑧)

Step 4: Please launch the Displaylink App

Dual 4k Extended Monitors Configuration



Step 5: Attach USB and USB-C devices(USB driver, keyboard, mouse, printer, etc.) to the USB ports on both the front and back of the dock (②,③,④,⑦). It is recommended to connect Wireless mouse and wireless devices to connect the USB 2.0 port (⑦).

Step 6: Connect the speaker, headphones, or microphone to the front audio ports(⑤). And connect the Ethernet cable to RJ45 Ethernet port(⑩)

USB-C DP Alt Mode (DP1.2 HBR2)

HDMI 1	DP 1	HDMI 2	DP2	Remark
3840x2160/60Hz				Single video output
	3840x2160/60Hz			
		3840x2160/60Hz		Dual video output
			3840x2160/60Hz	
3840x2160/60Hz		3840x2160/60Hz		
3840x2160/60Hz			3840x2160/60Hz	
	3840x2160/60Hz	3840x2160/60Hz		
	3840x2160/60Hz		3840x2160/60Hz	

Please note that you only can extend or mirror external dual monitors via:

HDMI 1 and HDMI 2 HDMI 1 and DP 2 DP 1 and HDMI 2 DP 1 and DP 2

**HDMI 1 and DP 1 cannot be used at the same time

**HDMI 2 and DP 2 cannot be used at the same time

Any questions, we are here to help!

Email: support@tobenone.com

The only question we can't fix is the one we don't know



Any questions, we are here to help!

Email: support@tobenone.com

Because the only question we can't fix is the one we don't know