

Advanced Contact Technology

**Multi-Contact**

**MC**

STÄUBLI GROUP

**Solarline**

Steckverbinder für erneuerbare Energie  
Connectors for Renewable Energy

Catalogue for Installers

**MC3 and MC4**



**N**

**Contents**

	MC4	MC3	
3 – 5		9 	<b>Plug connectors</b> Male and female PV-cable couplers Male and female PV-panel receptacles PV-Branch plugs and sockets
6 – 7		10 	<b>Accessories</b> Safety lock clip Sealing caps Open end spanner Socket wrench inserts Test plug
7		10 	<b>Adapter leads</b> PV-Adapter test leads PV-Adapter
8		11 	<b>Tools</b> Assembly tools
12 – 13		12 – 13 	<b>Cables &amp; cable assemblies</b> Solar cable FLEX-SOL-XL PV-Cable assemblies PV-Cable assemblies according to customer request
14 – 15		14 – 15 	<b>Branch cable leads</b> Branch cable leads PV-K/BC...


**Safety note**

Plug connectors that are not made by MC but can be mated with MC elements and are sometimes also described by their manufacturers as “MC compatible”, do not conform to the requirements for a safe electrical connection with long-term stability and for safety reasons may not be plugged together with MC elements. We therefore accept no liability if these connectors which are not approved by MC are mated with MC elements.


## Plug connectors MC4

### Male and female cable couplers MC4 (including insulating part)

Male cable coupler ⊖



Female cable coupler ⊕



Cable cross section	Ø A (Cable outer diameter)	Male cable coupler Order No.	Female cable coupler Order No.	Rated current <sup>1)</sup>	Rated voltage	Approvals
1,5 – 2,5 mm <sup>2</sup> 14 AWG	3 – 6 mm	<b>32.0011P0001-UR</b>	<b>32.0010P0001-UR</b>	17 A: 1,5 mm <sup>2</sup> 22,5 A: 2,5 mm <sup>2</sup> /14 AWG	1500 V DC (IEC) 1000 V DC (IEC) 600 V/1000 V DC (UL)	
1,5 – 2,5 mm <sup>2</sup> 14 AWG	5,5 – 9 mm	<b>32.0013P0001-UR</b>	<b>32.0012P0001-UR</b>			
4 – 6 mm <sup>2</sup> 12; 10 AWG	3 – 6 mm	<b>32.0015P0001-UR</b>	<b>32.0014P0001-UR</b>	39 A: 4 mm <sup>2</sup> /12 AWG 45 A: 6 mm <sup>2</sup> /10 AWG		
4 – 6 mm <sup>2</sup> 12; 10 AWG	5,5 – 9 mm	<b>32.0017P0001-UR</b>	<b>32.0016P0001-UR</b>			
8 AWG	6,5 – 8,9 mm	<b>32.0081-UR</b>	<b>32.0080-UR</b>	50A: 8AWG @90°C	600 V/1000 V DC (UL)	
10 mm <sup>2</sup>	5,5 – 9 mm	<b>32.0035P0001</b>	<b>32.0034P0001</b>	43A: 10mm <sup>2</sup> @ 90°C	1500 V DC (IEC) 1000 V DC (IEC)	



Assembly tools  
see page 6, 8



Assembly instructions **MA231**  
[www.multi-contact.com](http://www.multi-contact.com)

### Male and female panel receptacles MC4 (including insulating part)

Male panel receptacle



Female panel receptacle




Cable cross section	Male panel receptacle Order No.	Female panel receptacle Order No.	Rated current <sup>1)</sup>	Rated voltage	Approvals
1,5 – 2,5 mm <sup>2</sup>	<b>32.0077P0001-UR</b>	<b>32.0076P0001-UR</b>	17 A: 1,5 mm <sup>2</sup> 22,5 A: 2,5 mm <sup>2</sup> /14 AWG	1000 V/1250 V DC (IEC) 600 V/1000 V DC (UL)	
4 – 6 mm <sup>2</sup>	<b>32.0079P0001-UR</b>	<b>32.0078P0001-UR</b>			

<sup>1)</sup> Rated current 85 °C (IEC)

## PV-Branch plugs and sockets MC4

For safe and simple parallel- or serialparallel connection of PV-modules.  
Pluggable with single-pole MC PV-cable coupler MC4.

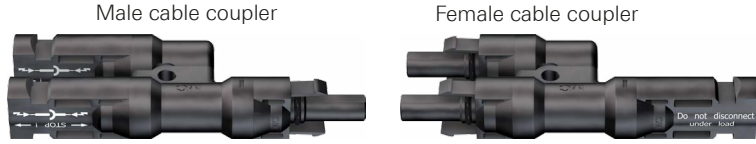

Male cable coupler Order-No.	Female cable coupler Order-No.	Rated current	Rated voltage
<b>32.0019</b>	<b>32.0018</b>	30 A	1000 V (IEC)

## Male and female cable couplers MC4-EVO 2 (including insulating part)



Cable cross section		Ø A (Cable Gland)	Male cable coupler Order No.	Female cable coupler Order No.	Rated current	Rated voltage	Approvals		
mm <sup>2</sup>	AWG								
1,5 2,5	16 14	4,7 – 6,1 mm	<b>32.0083P0001-UR</b>	<b>32.0082P0001-UR</b>	22 A: 1,5 mm <sup>2</sup> 39 A: 2,5 mm <sup>2</sup> /14 AWG	1000 V/1500 V DC (IEC) <sup>1)</sup> 600 V/1000 V DC (UL) <sup>2)</sup> 1500 V DC (JET) <sup>3)</sup>	x	x	x
1,5 2,5	16 14	6,1 – 7,6 mm	<b>32.0085P0001-UR</b>	<b>32.0084P0001-UR</b>					
4 6	16 14	4,7 – 6,1 mm	<b>32.0087P0001-UR</b>	<b>32.0086P0001-UR</b>	45 A: 4 mm <sup>2</sup> /12 AWG 53 A: 6 mm <sup>2</sup> /10 AWG				
4 6	16 14	6,1 – 7,6 mm	<b>32.0089P0001-UR</b>	<b>32.0088P0001-UR</b>					
4 6	16 14	7,6 – 8,5 mm	<b>32.0091P0001-UR</b>	<b>32.0090P0001-UR</b>					
10	8	7,6 – 8,5 mm	<b>32.0093P0001-UR</b>	<b>32.0092P0001-UR</b>	69 A				

Assembly tools  
see pages 6, 8

Assembly instructions **MA273**  
[www.multi-contact.com](http://www.multi-contact.com)

<sup>1)</sup> The connectors are to be used with PV1F or PV 1500 DC-F cables.  
<sup>2)</sup> The connectors are to be used with USE2 or PV-Wire cables.  
<sup>3)</sup> The connectors are to be used with cables with the "S-JET mark" label.

### Male and female cable couplers MC4-EVO 3

Ready-made with cable. Can be unlocked only with special tool. TÜV 1000 V DC/1500 V DC <sup>2)</sup>, UL 1000 V DC/600 V DC <sup>2)</sup>.



Female cable coupler	Type	Male cable coupler	Conductor cross section		Order No.	Rated current	Rated voltage	Colour of cable	Approvals
			mm <sup>2</sup>	AWG					
<b>BETAflam® Solar 125 Flex UL 1000 V</b>									
x			2,5	14	<b>32.1188-<sup>1)</sup></b>	22	1500 (TÜV) 1000 (UL)	■	  
		x	2,5	14	<b>32.1189-<sup>1)</sup></b>	22			
x			4,0	12	<b>32.1191-<sup>1)</sup></b>	30			
		x	4,0	12	<b>32.1192-<sup>1)</sup></b>	30			
x			6,0	10	<b>32.1194-<sup>1)</sup></b>	30			
		x	6,0	10	<b>32.1195-<sup>1)</sup></b>	30			
<b>FLEX-SOL-XL</b>									
x			4,0	12	<b>32.1164-<sup>1)</sup>*</b>	30	1000 (TÜV)	■	  
		x	4,0	12	<b>32.1165-<sup>1)</sup>*</b>	30			
x			6,0	10	<b>32.1167-<sup>1)</sup>*</b>	30			
		x	6,0	10	<b>32.1168-<sup>1)</sup>*</b>	30			
<b>Byson</b>									
x			2,5	14	<b>32.1179-<sup>1)</sup></b>	22	1000 (TÜV) (UL)	■	  
		x	2,5	14	<b>32.1180-<sup>1)</sup></b>	22			
x			4,0	12	<b>32.1182-<sup>1)</sup></b>	30			
		x	4,0	12	<b>32.1183-<sup>1)</sup></b>	30			
x			6,0	10	<b>32.1185-<sup>1)</sup></b>	30			
		x	6,0	10	<b>32.1186-<sup>1)</sup></b>	30			

Unlocking tool see page 6

\* Add the desired colour code  
<sup>1)</sup> Please indicate cable length in cm; cable lengths on request.  
<sup>2)</sup> Depending on cable type

## Accessories MC4

### Safety lock clip MC4

The pluggable safety lock clip secures the PV plug connection and can only be unlocked with the tools (see below).



Order-No.	Description	Fitting to	See assembly instructions
<b>32.5280</b>	Safety lock clip MC4	MC4 cable couplers MC4 panel receptacles	Assembly instructions <b>MA252</b> <a href="http://www.multi-contact.com">www.multi-contact.com</a>

### Sealing caps MC4


Sealing caps made from TPE for tight sealing of unplugged PV connectors.



For plug side	For socket side	Description
<b>32.0717</b>	<b>32.0716</b>	Sealing cap MC4, without cord

### Open-end spanner and unlocking tool MC4 and MC4-EVO 3


To tighten and unscrew the cable gland and to open the locking device.

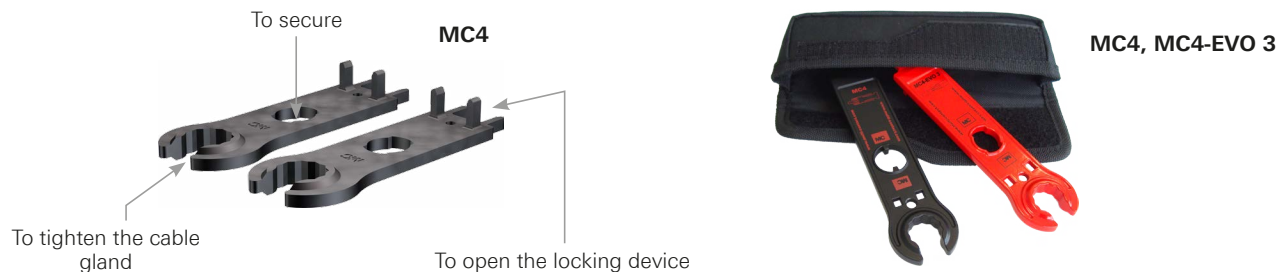

Order-No.	suitable for	Description	See assembly instructions
<b>32.6024</b>	MC4	Open-end spanner set (2 open-end spanners, plastics)	MA231, MA232, MA260
<b>32.6058</b>	MC4, MC4-EVO 3	Unlocking tool, incl. belt pouch (2 open-end spanners, metal)	MA270

### Socket wrench inserts MC4


MC recommend these socket wrench inserts for a simple and safe assembly of the panel receptacle.

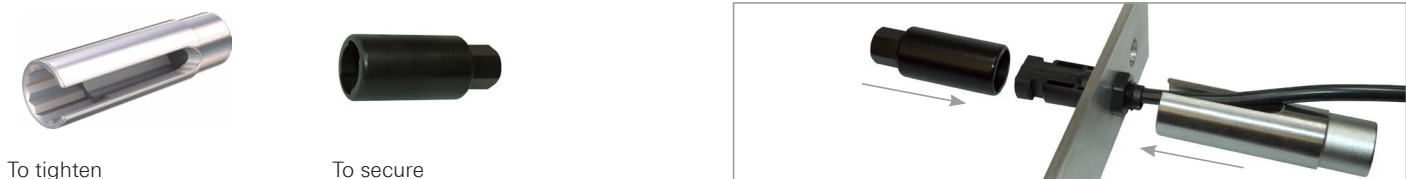


Order-No.	Description	See assembly instructions
<b>32.6006</b>	Socket wrench insert to tighten (MC3, MC4)	Assembly instructions <b>MA232</b> <a href="http://www.multi-contact.com">www.multi-contact.com</a>
<b>32.6026</b>	Socket wrench insert to secure (MC4)	

### Test plug PV-PST

This test plug is used to control the correct engagement of the contact in the insulation.

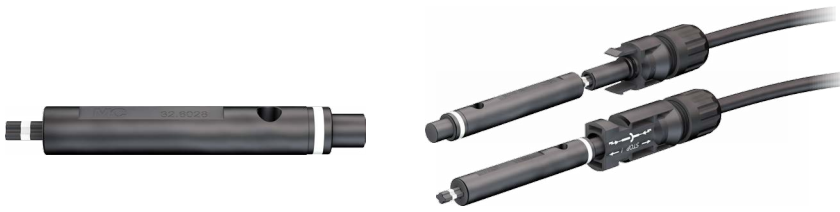


Order-No.	Description	See assembly instructions
<b>32.6028</b>	Test plug	 Assembly instructions <b>MA231, MA232</b> <a href="http://www.multi-contact.com">www.multi-contact.com</a>

### PV-Adapter leads MC4

#### Male and female PV-Adapter test leads MC4

One end with MC4 PV Plug connector, other end with Ø 4 mm safety plug for measuring instruments for safe current and voltage-measuring on PV-modules and systems.

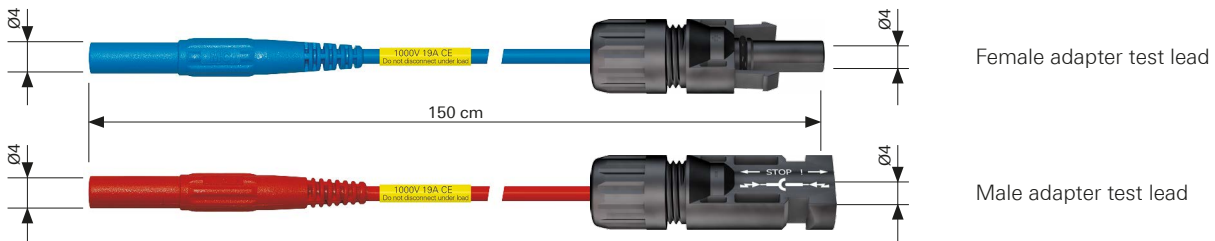


Male adapter test lead Order-No.	Female adapter test lead Order-No.	Rated current	Rated voltage	Cable cross section
<b>32.1199-150*</b> 21 22	<b>32.1198-150*</b> 21 23 29	19 A	1000 V	1 mm <sup>2</sup>

\* Add the desired colour code

### PV-Adapter MC3/MC4

To interconnect the two MC PV-Plug connector systems MC3 and MC4.

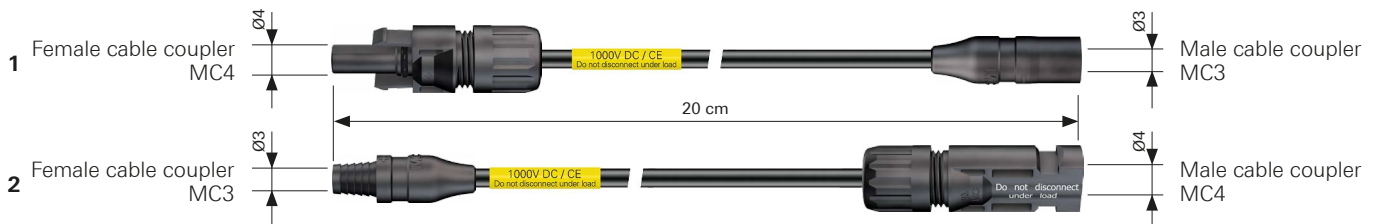


1 PV Adapter-MC4/MC3 Order-No.	2 PV Adapter-MC3/MC4 Order-No.	Rated current	Rated voltage
<b>32.6096</b>	<b>32.6097</b>	20 A	1000 V

**Tools MC4**

**Stripping pliers**

With length stop for conductor cross sections 4 mm<sup>2</sup>, 6 mm<sup>2</sup> and 10 mm<sup>2</sup>. Specially adapted for the FLEX-SOL-XL PV cable, for stripping small cable quantities on the site. An additional insert can be ordered for conductor cross sections of 1,5 mm<sup>2</sup>, 2,5 mm<sup>2</sup>, 4 mm<sup>2</sup> and 6 mm<sup>2</sup>.

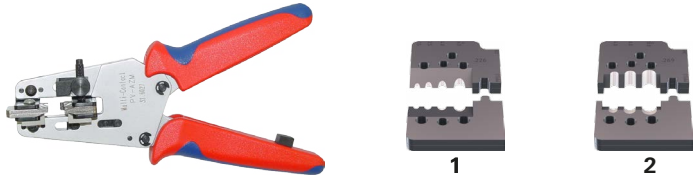

Cable cross section mm <sup>2</sup>	Order-No.	See assembly instructions
4/6/10	<b>32.6027-410</b>	 Assembly instructions <b>MA231, MA232</b> <a href="http://www.multi-contact.com">www.multi-contact.com</a>

**Accessories**


1 Insert for cable cross section 1,5/2,5/4/6 mm <sup>2</sup>	32.6057-156	2 Insert for cable cross section 4/6/10 mm <sup>2</sup>	32.6057-410
--	-------------	---	-------------

**Crimping pliers MC4<sup>1)</sup>**

Crimping pliers incl. locator and insert.



→ Our **Solarline** catalog contains our entire range of crimping pliers

Cable cross section mm <sup>2</sup>	Order-No.	suitable for	See assembly instructions
2,5/4/6	<b>32.6020-19100</b>	MC4	 Assembly instructions <b>MA251</b> <a href="http://www.multi-contact.com">www.multi-contact.com</a>
4/10	<b>32.6020-20100</b>	MC4	
2,5/4/6	<b>32.6020-41100</b>	MC4-EVO 2	

**Accessories for crimping pliers MC4**

1 Insert 1,5/2,5/4 mm <sup>2</sup>	32.6021-18100
2 Insert 2,5/4/6 mm <sup>2</sup>	32.6021-19100

**Accessories for crimping pliers MC4-EVO 2**

3 Insert 4/10 mm <sup>2</sup>	32.6021-20100	Insert 4/10 mm <sup>2</sup>	32.6021-42100
4 Locator	32.6040	Locator	32.6056

**Tool case MC4**

**Tool case contains:**

- 1 Crimping pliers MC4 (32.6020-19100)
- 2 Open end spanner set MC4
- 3 Plastic box

**Optional:**

- 4 Stripping pliers (Ref. 32.6027-410)
- 5 Socket wrench insert to tighten (Ref. 32.6006)
- 6 Socket wrench insert to secure (Ref. 32.6026)
- 7 Insert 4 mm<sup>2</sup>/10 mm<sup>2</sup> (Ref. 32.6021-20100)



Description	Order-No.	Tool case dimensions (mm)		
		width	depth	height
Tool case MC4	<b>32.6019</b>	345	275	90




**Plug connectors MC3**

**Male and female cable couplers MC3**

Male cable coupler ⊖

Female cable coupler ⊕

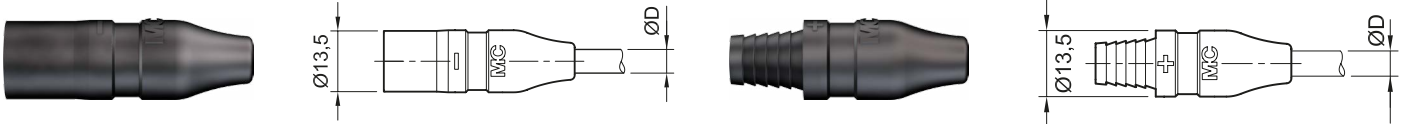

Cable cross section		Ø D (Cable outer diameter)	Male cable coupler Order No.	Female cable coupler Order No.	Rated current	Rated voltage	Approvals
mm <sup>2</sup>	AWG						
2,5 4	14 12	3,2 – 4,8 mm	<b>32.0001-UR</b>	<b>32.0000-UR</b>	20 A	1000 V DC (IEC) 600 V DC (UL)	
		4,9 – 7,1 mm	<b>32.0003-UR</b>	<b>32.0002-UR</b>			
		6,5 – 9,0 mm	<b>32.0005-UR</b>	<b>32.0004-UR</b>			
6	10	6,5 – 9,0 mm	<b>32.0007-UR</b>	<b>32.0006-UR</b>	30 A	1000 V DC (IEC)	
6	10	4,9 – 7,1 mm	<b>32.0063</b>	<b>32.0062</b>	30 A		
10	–	6,5 – 9,0 mm	<b>32.0033</b>	<b>32.0032</b>	43 A		

Assembly tools see page 11

Assembly instructions **MA207**  
[www.multi-contact.com](http://www.multi-contact.com)

**Male and female panel receptacles MC3**

Male panel receptacle


Female panel receptacle



Cable cross section	Male panel receptacle Order No.	Female panel receptacle Order No.	Rated current	Rated voltage
2,5 – 4 mm <sup>2</sup>	<b>32.0053P0001</b>	<b>32.0052P0001</b>	20A	1000V DC
6 mm <sup>2</sup>	<b>32.0049P0001</b>	<b>32.0048P0001</b>	30 A	1000 V DC (IEC)

**PV-Branch plugs and sockets MC3**

For safe and simple parallel- or serialparallel connection of PV-modules.

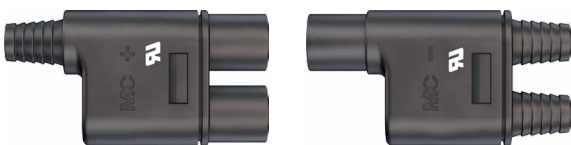

Branch plug Order No.	Branch socket Order No.	Rated current	Rated voltage	Approvals
<b>32.0009-UR</b>	<b>32.0008-UR</b>	30 A	1000 V DC (MC), 600 V DC (UL)	

**Accessories MC3**

**Sealing caps MC3**

Sealing caps made from TPE for tight sealing of unplugged PV connectors. To prevent loss, simply push the strap loop over the cable connector.




For plug side	For socket side	Description
<b>32.0711</b>	<b>32.0710</b>	Sealing caps MC3, with cord
<b>32.0721</b>	<b>32.0720</b>	Sealing caps MC3, without cord

**PV-Adapter leads MC3**

**PV-Adapter test leads MC3**

One end with MC3 PV plug connector, other end with Ø 4 mm safety plug for measuring instruments for safe current and voltage-measuring on PV-modules and systems.

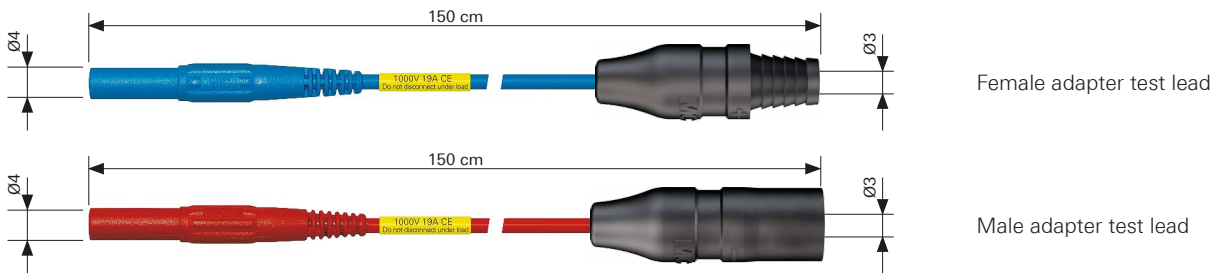


Male adapter test lead Order-No.	Female adapter test lead Order-No.	Rated current	Rated voltage
<b>32.1099-150*</b> 21 22	<b>32.1098-150*</b> 21 23 29	19 A	1000 V

\* Add the desired colour code

**PV-Adapter MC3/MC4**

To interconnect the two MC PV-Plug connector systems MC3 and MC4.

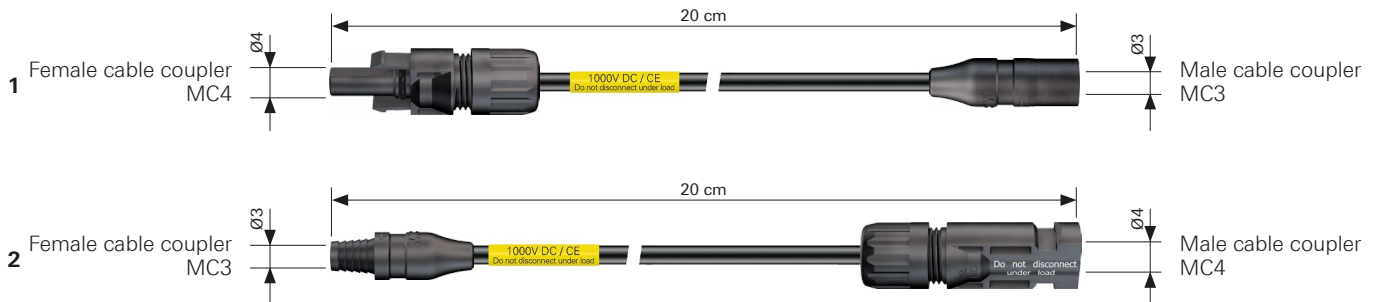

1 PV Adapter-MC4/MC3 Order-No.	2 PV Adapter-MC3/MC4 Order-No.	Rated current	Rated voltage
<b>32.6096</b>	<b>32.6097</b>	20 A	1000 V

**Tools MC3**

**Stripping pliers**

With length stop for different conductor cross sections. Specially adapted for the FLEX-SOL-XL PV-cable.




**Crimping pliers MC3**

For flexible cable only (class 5 and 6).



**Crimping pliers MC3**

Incl. locator and insert.

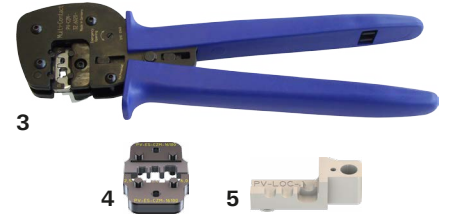

	For cable cross sections mm <sup>2</sup>	Order-No.	See assembly instructions
1	1,5/2,5/4/6	32.6027-156	MA207, MA223, MA232, MA259, MA260
2	2,5/4	32.6008	MA207, MA223
3	2,5/4/6	32.6020-16100A	MA251

**Accessories**

4	Insert for cable cross section 2,5/4/6 mm <sup>2</sup>	32.6021-16100	5	Locator MC3	32.6039
---	--	---------------	---	-------------	---------

**Assembly device MC3 (incl. spindles)**

For assembly of the male and female cable coupler, incl. tapered spindles. Suitable for on-site use. Only the tool pos.1 may be used for the assembly of UL-approved products.



	Description	Order-No.	See assembly instructions
1	Assembly device, for cable cross sections 2,5 – 6 mm <sup>2</sup>	32.6050	MA207, MA259
2	Assembly device, for cable cross sections 2,5 – 10 mm <sup>2</sup>	32.6060	MA268

**Tool case MC3**

**Tool case contains:**

- 1 Assembly instructions
- 2 Assembly device (Order-No. 32.6050)
- 3 Crimping pliers MC3 (Order-No. 32.6008)



**Tool case contains:**

- 1 Assembly instructions
- 2 Assembly device (Order-No. 32.6050)
- 3 Crimping pliers MC3/MC4 (Order-No. 32.6020-16100A)



Description	Order-No.	Tool case dimensions (mm)		
		width	depth	height
A Tool case MC3	32.6029	458	315	155
B Tool case MC3	13 00 591	458	315	155

**Cables & cable assemblies**

**Solar cable FLEX-SOL-XL**

The single-pole, double insulated solar cable FLEX-SOL-XL was particularly designed for photovoltaic applications. The cable is TÜV certified and fulfills the latest quality standards.



Type	Order-No.	Cardboard box	Order-No.	Spool	Conductor cross section	Outer-Ø	Rated current <sup>1)</sup>	Conductor resistance / 20 °C	Rated voltage	Colors
FLEX-SOL-XL 2,5	62.7426-110*	150	62.7426-910*	700	2,5	5,1	41	7,7	1000	21
FLEX-SOL-XL 4,0	62.7427-110*	100	62.7427-910*	500	4,0	5,8	55	4,75	1000	
FLEX-SOL-XL 6,0	62.7428-110*	75	62.7428-910*	400	6,0	7,0	70	3,39	1000	
FLEX-SOL-XL 10	62.7429-110*	50	62.7429-910*	200	10	8,2	98	1,91	1000	

**PV-Cable assemblies MC4**

We recommend Multi-Contact's various PV-connectors and cable assemblies for safe and professional cabling.

Ordering Information					Cable
Type	Order-No.	Female ⊕	Cable type	Male ⊖	Colours
	32.1133-2)*	×	FLEX-SOL-XL 4,0 (4 mm <sup>2</sup> )		21
	32.1134-2)*		FLEX-SOL-XL 4,0 (4 mm <sup>2</sup> )	×	
	32.1135-2)*	×	FLEX-SOL-XL 4,0 (4 mm <sup>2</sup> )	×	
	32.1136-2)*	×	FLEX-SOL-XL 6,0 (6 mm <sup>2</sup> )		
	32.1137-2)*		FLEX-SOL-XL 6,0 (6 mm <sup>2</sup> )	×	
	32.1138-2)*	×	FLEX-SOL-XL 6,0 (6 mm <sup>2</sup> )	×	

**PV-Cable assemblies MC3**

We recommend Multi-Contact's various PV-connectors and cable assemblies for safe and professional cabling.

Ordering Information					Cable
Type	Order-No.	Female ⊕	Cable type	Male ⊖	Colours
	32.1063-2)*	×	FLEX-SOL-XL 4,0 (4 mm <sup>2</sup> )		21
	32.1064-2)*		FLEX-SOL-XL 4,0 (4 mm <sup>2</sup> )	×	
	32.1065-2)*	×	FLEX-SOL-XL 4,0 (4 mm <sup>2</sup> )	×	
	32.1066-2)*	×	FLEX-SOL-XL 6,0 (6 mm <sup>2</sup> )		
	32.1067-2)*		FLEX-SOL-XL 6,0 (6 mm <sup>2</sup> )	×	
	32.1068-2)*	×	FLEX-SOL-XL 6,0 (6 mm <sup>2</sup> )	×	

\* Add the desired colour code

<sup>1)</sup> Nominal current up to +60 °C ambient temperature according to DIN VDE 0298, part 4

<sup>2)</sup> Length in cm, please indicate

Cable assemblies

Quantity	Order	Quotation	Reference
<b>Side 1</b>		<b>Side 2</b>	
<p><b>MC3</b></p> <p><input type="checkbox"/> PV-KBT3 </p> <p><input type="checkbox"/> PV-KST3 </p> <p><input type="checkbox"/> PV-ADBP3 </p> <p><input type="checkbox"/> PV-ADSP3 </p>		<p><b>MC3</b></p> <p><input type="checkbox"/> PV-KBT3 </p> <p><input type="checkbox"/> PV-KST3 </p> <p><input type="checkbox"/> PV-ADBP3 </p> <p><input type="checkbox"/> PV-ADSP3 </p>	
<p><b>MC4</b></p> <p><input type="checkbox"/> PV-KBT4 </p> <p><input type="checkbox"/> PV-KST4 </p> <p><input type="checkbox"/> PV-ADBP4-S2 </p> <p><input type="checkbox"/> PV-ADSP4-S2 </p>		<p><b>MC4</b></p> <p><input type="checkbox"/> PV-KBT4 </p> <p><input type="checkbox"/> PV-KST4 </p> <p><input type="checkbox"/> PV-ADBP4-S2 </p> <p><input type="checkbox"/> PV-ADSP4-S2 </p>	
<p><b>MC4-EVO 2</b></p> <p><input type="checkbox"/> PV-KBT4-EVO 2 </p> <p><input type="checkbox"/> PV-KST4-EVO 2 </p>		<p><b>MC4-EVO 2</b></p> <p><input type="checkbox"/> PV-KBT4-EVO 2 </p> <p><input type="checkbox"/> PV-KST4-EVO 2 </p>	
<p><b>MC4-EVO 3</b></p> <p><input type="checkbox"/> PV-PLS-B </p> <p><input type="checkbox"/> PV-PLS-S </p>		<p><b>MC4-EVO 3</b></p> <p><input type="checkbox"/> PV-PLS-B </p> <p><input type="checkbox"/> PV-PLS-S </p>	
<p><input type="checkbox"/> <b>Cable lug</b></p> <p><input type="checkbox"/> Ø <input type="text"/> </p> <p><input type="checkbox"/> Ø <input type="text"/> </p> <p>Isolation: <input type="checkbox"/> without <input type="checkbox"/> with</p>		<p><input type="checkbox"/> <b>Cable lug</b></p> <p><input type="checkbox"/> Ø <input type="text"/> </p> <p><input type="checkbox"/> Ø <input type="text"/> </p> <p>Isolation: <input type="checkbox"/> without <input type="checkbox"/> with</p>	
<p><input type="checkbox"/> <b>Partial stripping</b></p> <p>Length: <input type="text"/> (max. 45 mm) </p>		<p><input type="checkbox"/> <b>Partial stripping</b></p> <p>Length: <input type="text"/> (max. 45 mm) </p>	
<p><input type="checkbox"/> <b>Not stripped</b> </p>		<p><input type="checkbox"/> <b>Not stripped</b> </p>	
<p><input type="checkbox"/> <b>Other</b> <input type="text"/></p>		<p><input type="checkbox"/> <b>Other</b> <input type="text"/></p>	
<p><b>Cable</b></p> <p><b>Cable cross section (mm<sup>2</sup>):</b></p> <p>5 cable types</p> <p><input type="checkbox"/> 2,5 <input type="checkbox"/> 4 <input type="checkbox"/> 6 <input type="checkbox"/> 10</p> <p><b>Length of cable:</b></p> <p><input type="text"/> cm</p>			
<p><b>Sender</b></p> <p>Company <input type="text"/></p> <p>Name <input type="text"/></p> <p>Department <input type="text"/></p> <p>Address <input type="text"/></p> <p>Tel. <input type="text"/></p> <p>Fax <input type="text"/></p> <p>E-Mail <input type="text"/></p> <p>Date <input type="text"/></p> <p>Signature <input type="text"/></p> <p>Other <input type="text"/></p>			

**Branch cable lead PV-K/BC...**

<input type="text"/>	<b>Quantity</b>	<input type="text"/>	<b>Order</b>	<input type="text"/>	<b>Quotation</b>	<input type="text"/>	<b>Reference</b>
----------------------	-----------------	----------------------	--------------	----------------------	------------------	----------------------	------------------

**4a** Beginning of main lead

cm (min. 25 cm, max. 1000 cm)  
(MC4: min. 28 cm, max. 1000 cm)

**2** Overall length  m (min. 0,56 m max. 100 m)

**4b** Length of intermediate sections (min. 25 cm)<sup>1)</sup>

1	2	3	4	5	6	7	8
16	17	18	19	20	21	22	23

**1** Cross section main cable/branch cables

**A** 4 mm<sup>2</sup>/4 mm<sup>2</sup>  
 **B** 6 mm<sup>2</sup>/2,5 mm<sup>2</sup>

**3** Length of branches  cm (min. 25 cm, max. 120 cm)

**5** Number of branches  (max. 80)

**9** Sealing caps (for all plug connectors)

**Y** with  
 **N** without


**6** Beginning of main lead

	<input type="checkbox"/> <b>S3</b>	PV-KST3
	<input type="checkbox"/> <b>B3</b>	PV-KBT3
	<input type="checkbox"/> <b>S4</b>	PV-KST4
	<input type="checkbox"/> <b>B4</b>	PV-KBT4
	<input type="checkbox"/> <b>00</b>	Not stripped (straight cut)
	<input type="text"/> <b>mm</b>	Indicate length to be stripped
<input type="checkbox"/> <b>X</b>		Customer-specific fabrication

www Interactive Form: [www.multi-contact.com](http://www.multi-contact.com)  
> Downloads > Online Forms

To determine your article designation, please fill in boxes 1 – 9.  
After sending in this order form you will receive an approval sketch for your definitive order.

**PV-K/BC-**  -  /  - **X** -  -  /  /  -

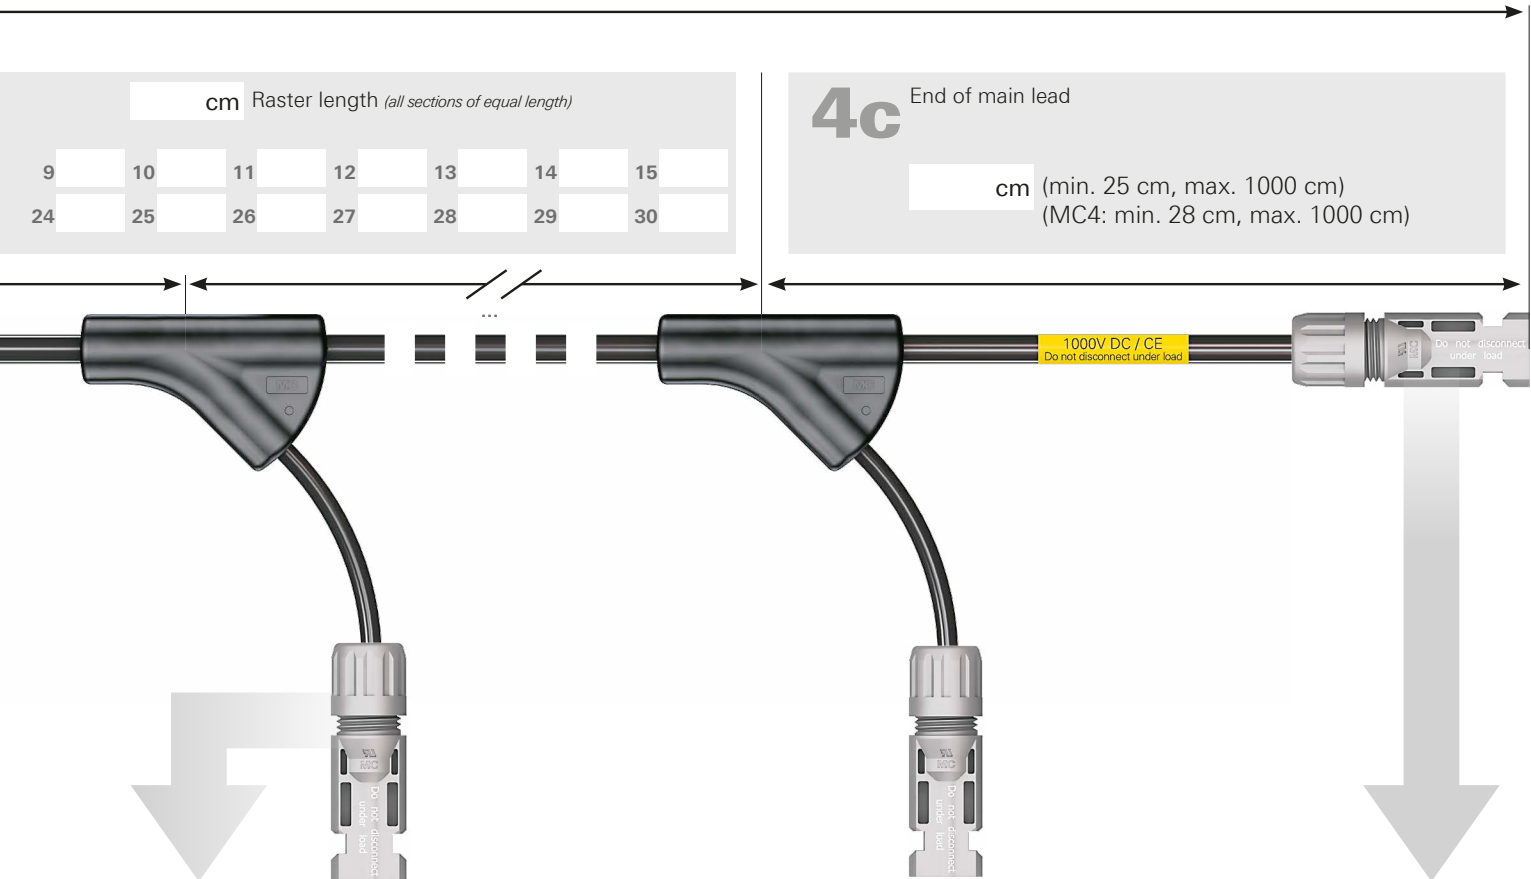

**7** Termination of branches

	<input type="text" value="S3"/>	PV-KST3
	<input type="text" value="B3"/>	PV-KBT3
	<input type="text" value="S4"/>	PV-KST4
	<input type="text" value="B4"/>	PV-KBT4
	<input type="text" value="S5"/>	PV-PLS-S
	<input type="text" value="B5"/>	PV-PLS-B
	<input type="text" value="00"/>	Not stripped (straight cut)
	<input type="text" value="mm"/>	Indicate length to be stripped
<input type="text" value="X"/>		Customer-specific fabrication

End of main lead **8**

PV-KST3	<input type="text" value="S3"/>	
PV-KBT3	<input type="text" value="B3"/>	
PV-KST4	<input type="text" value="S4"/>	
PV-KBT4	<input type="text" value="B4"/>	
Not stripped (straight cut)	<input type="text" value="00"/>	
Indicate length to be stripped	<input type="text" value="mm"/>	
Customer-specific fabrication	<input type="text" value="X"/>	

<sup>1)</sup> For more than 30 sections with individual lengths, please fill in an additional table.

**Headquarters:****Multi-Contact AG**

Stockbrunnenrain 8  
CH – 4123 Allschwil  
Tel. +41/61/306 55 55  
Fax +41/61/306 55 56  
mail [basel@multi-contact.com](mailto:basel@multi-contact.com)  
[www.multi-contact.com](http://www.multi-contact.com)

**Multi-Contact Deutschland GmbH**

Hegenheimer Straße 19  
Postfach 1606  
DE – 79551 Weil am Rhein  
Tel. +49/76 21/6 67 - 0  
Fax +49/76 21/6 67 - 100  
mail [weil@multi-contact.com](mailto:weil@multi-contact.com)

**Multi-Contact Essen GmbH**

Westendstraße 10  
Postfach 10 25 27  
DE – 45025 Essen  
Tel. +49/2 01/8 31 05 - 0  
Fax +49/2 01/8 31 05 - 99  
mail [essen@multi-contact.com](mailto:essen@multi-contact.com)

**Multi-Contact France SAS**

4 rue de l'Industrie  
BP 37  
FR – 68221 Héisingue Cedex  
Tel. +33/3/89 67 65 70  
Fax +33/3/89 69 27 96  
mail [france@multi-contact.com](mailto:france@multi-contact.com)

**Multi-Contact USA**

100 Market Street  
US – Windsor, CA 95492  
Tel. +1/707/838 - 0530  
Fax +1/707/838 - 2474  
mail [usa@multi-contact.com](mailto:usa@multi-contact.com)  
[www.multi-contact-usa.com](http://www.multi-contact-usa.com)

**Multi-Contact****Handelsges.m.b.H. Austria**

Hauptplatz 3b  
AT – 3452 Heiligeneich  
Tel. +43/2275/56 56  
Fax +43/2275/56 56 4  
mail [austria@multi-contact.com](mailto:austria@multi-contact.com)

**Multi-Contact Benelux**

**c/o Stäubli Benelux N.V.**  
Meensesteenweg 407-409  
BE – 8501 Bissegem  
Tel. +32/56 36 41 00  
Fax +32/56 36 41 10  
mail [benelux@multi-contact.com](mailto:benelux@multi-contact.com)

**Multi-Contact Czech**

**c/o Stäubli Systems, s.r.o.**  
Hradecká 536  
CZ – 53009 Pardubice  
Tel. +420/466/616 126  
Fax +420/466/616 127  
mail [connectors.cz@staubli.com](mailto:connectors.cz@staubli.com)

**Multi-Contact Española**

**c/o Stäubli Española S.A.U.**  
C/Reina Elionor 178, 1º  
ES – 08205 Sabadell  
Tel. +34/93/720 65 50  
Fax +34/93/712 42 56  
mail [spain@multi-contact.com](mailto:spain@multi-contact.com)

**Multi-Contact (UK) Ltd.**

Multi-Contact House  
Presley Way, Crownhill, Milton Keynes  
GB – Buckinghamshire MK8 0ES  
Tel. +44/1908 26 55 44  
Fax +44/1908 26 20 80  
mail [uk@multi-contact.com](mailto:uk@multi-contact.com)

**Multi-Contact Italia**

**c/o Stäubli Italia S.p.A.**  
Via Rivera, 55  
IT – 20841 Carate Brianza (MB)  
Tel. +39/0362/94 45 01  
Fax +39/0362/94 43 82  
mail [italy@multi-contact.com](mailto:italy@multi-contact.com)

**Multi-Contact Poland**

**c/o Stäubli Lodz**  
ul. Okólna 80/82, Łagiewniki Nowe  
PL – 95-002 Smardzew  
Tel. +48/42/636 85 04  
Fax +48/42/637 13 91  
mail [poland@multi-contact.com](mailto:poland@multi-contact.com)

**Multi-Contact Portugal**

**c/o Stäubli Portugal**  
Representações Lda  
Via Central de Milheirós, 171-A  
PT – 4475-330 Milheirós/Maia  
Tel. +351/229 783 950  
Fax +351/229 783 958  
mail [portugal@multi-contact.com](mailto:portugal@multi-contact.com)

**Multi-Contact Türkiye**

**c/o Stäubli Sanayi Makine ve**  
Aksesuarları Ticaret Ltd. Şti.  
Atatürk Mahallesi, Marmara  
Sanayi Sitesi, B Blok No: 28 İkitelli  
TR – 34306 İstanbul  
Tel. +90/212/472 13 00  
Fax +90/212/472 12 30  
mail [turkey@multi-contact.com](mailto:turkey@multi-contact.com)

**Multi-Contact Russia**

**OOO STAUBLI RUS**  
ul.Startovaya 8a  
RU – 196210 Saint Petersburg  
Tel. + 7 812 334 46 30  
Fax + 7 812 334 46 36  
mail [russia@multi-contact.com](mailto:russia@multi-contact.com)  
[www.multi-contact-russia.ru](http://www.multi-contact-russia.ru)

**Multi-Contact Brazil**

**c/o Stäubli Comércio, Importação,**  
**Exportação e Representações Ltda.**  
Rua Henri Dunant, 137 - Conj. D  
BR – 04709-110 São Paulo  
Tel. +55/11/2348 7400  
Fax +55/11/5181 8334  
mail [brazil@multi-contact.com](mailto:brazil@multi-contact.com)

**Multi-Contact China**

**c/o Stäubli Mechatronic Co., Ltd.**  
Hangzhou Economic and  
Technological Development Zone  
No. 123 Weiken Street  
CN – 310018 Hangzhou  
Tel. +86/400 66 700 66  
Fax +86/571/86 91 25 22  
mail [hangzhou@staubli.com](mailto:hangzhou@staubli.com)

**Multi-Contact Hongkong**

**c/o Stäubli (H.K.) Ltd.**  
Room A1, 33/F, TML Tower,  
3 Hoi Shing Road, Tsuen Wan  
HK – Hong Kong  
Tel. +852/2366 0660  
Fax +852/2311 4677  
mail [connectors.hk@staubli.com](mailto:connectors.hk@staubli.com)

**Multi-Contact Taiwan**

**c/o Stäubli (H.K.) Ltd.**  
**Taiwan Branch**  
6/F-3, No. 21, Lane 583  
Ruiguang Road, Neihu Dist.  
TW – Taipei City 11466  
Tel. +886/2/8797 7795  
Fax +886/2/8797 8895  
mail [connectors.tw@staubli.com](mailto:connectors.tw@staubli.com)

**Multi-Contact India**

**c/o Stäubli Tec Systems India Pvt Ltd**  
Stäubli House  
Plot No° 55, Road No° 15 / 17  
M.I.D.C. Industrial Area Andheri (East)  
IND – 400093 Mumbai  
Tel. +91/22/282 39 343 - 345  
Fax +91/22/282 35 484  
mail [india@multi-contact.com](mailto:india@multi-contact.com)

**Multi-Contact Korea**

**c/o Stäubli Korea Co., Ltd.**  
INNOBIZ TOWER 13F  
559, Dalseo-daero, Dalseo-gu,  
KR – Daegu, 704-919  
Tel. +82/53/753/0075  
Fax +82/53/753/0072  
mail [korea@multi-contact.com](mailto:korea@multi-contact.com)


**Multi-Contact**

**(South East Asia) Pte. Ltd.**  
215 Henderson Road #01-02  
Henderson Industrial Park  
SG – Singapore 159554  
Tel. +65/626 609 00  
Fax +65/626 610 66  
mail [singapore@multi-contact.com](mailto:singapore@multi-contact.com)

**Multi-Contact Thailand**

**c/o Stäubli (Thailand) Co., Ltd.**  
33/4, The 9th Towers Grand Rama 9,  
24th Floor, TNA 02-03,  
Huay Kwang Sub-District,  
Huay Kwang District,  
TH – Bangkok 10310  
Tel. +66/2/168 14 24  
Fax +66/2/168 14 27  
mail [thailand@multi-contact.com](mailto:thailand@multi-contact.com)

Your Multi-Contact representative:



**More about our  
photovoltaic products:**

Solarline

Catalogue MC3 &amp; MC4

[www.multi-contact.com](http://www.multi-contact.com)