




READ OPERATOR'S MANUAL BEFORE USING THIS TOOL



For use with iQ2000 Systems

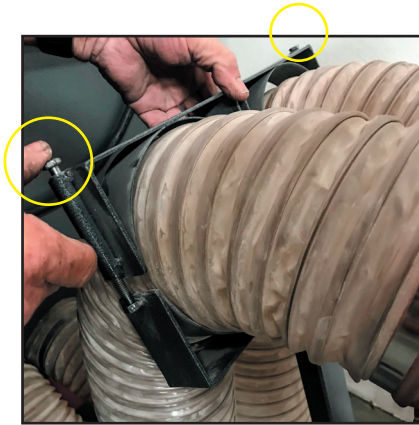

Remove top piece from hose minder attachment by loosening the 2 side bolts with ratchet.




Place hose minder bottom piece behind table top and under the hoses.



Secure hose minder to bottom of the saw frame with the 4 - 7/16th self-tapping screws (provided).

NOTE: Hose minder mounting is designed to work with MK5000 and other similar 20" masonry saws. However, depending on year, make, and model of your particular saw, some adjustment or mount modification may be necessary.

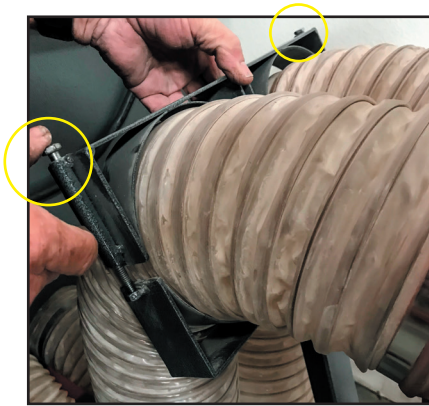

Place hose minder top piece over hoses and reattach to bottom piece with the original side bolts.



The hose minder is now ready for use. Note: Make sure table is level for best performance.