

0.77in [19mm]
(MAX INTONATION)

0.37in [9mm]
(MIN INTONATION)

0.63in [16mm]
(MAX STRING HEIGHT)

0.750in [19.1mm]
±.062in [1.5mm]
(STRING SPACING)

USES CENTER AND OUTER HOLES
OF STANDARD 5 SCREW MOUNT

0.40in [10mm]
(MIN STRING HEIGHT)

QUICK RELEASE
CHANNELS

1.305in [33.1mm]


3.383in [85.9mm]

2.000in [50.8mm]

R0.125in [3.2mm]

1.375in [34.9mm]

1.375in [34.9mm]

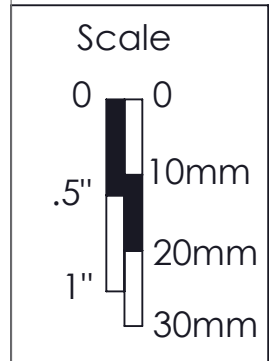

WEIGHT (WITH MOUNTING HARDWARE):
ALUM: 4.8oz [136g] **BRASS:** 9.2oz [261g]

THIS DRAWING IS THE SOLE PROPERTY OF HIPSHOT PRODUCTS, INC. ALL RIGHTS ARE RESERVED. DIMENSIONS AND PRODUCT FEATURES MAY CHANGE WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCE: ± .005

REV DATE:
12/29/2021

5A4FM1 4 STG A STYLE
FENDER MOUNT 1 BRIDGE
DIMENSIONS



8248 STATE ROUTE 96
Interlaken, NY 14847 U.S.A.
TEL:607-532-9404 FAX:607-532-9530
E-MAIL: info@HipshotProducts.com