


Technical Documentation

CJM0504

Optim JM | AEHH8N_JM

Date: April 14, 2021

	
	Date: April 14, 2021

Technical Data Sheet

Motor Type: AEHH8N_JM	Catalogue No: CJM0504
-----------------------	-----------------------

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
50	4	1770	326JM	230 / 460	60	3
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.15	Continuous	B	-40 to 40°C °C	<1000 m

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
94.50	93.60	95.00	95.00	87.00	86.00	80.50
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
148.30	210	170	220	26.2 / 13.1	113.8 / 56.9	726.00 / 363.00
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
G	10.123	232.00	427.00	17	12	76.0

VFD Duty Information

Speed Range			VFD		S.F.
Constant Torque	Variable Torque	Constant Power	Carrier	Type	
6-60Hz	3-60Hz	60-90Hz	0	VPWM or CPWM	1.0 Only

Hazardous Locations Information

CSA Certified	
Class I, Div 2, Groups B, C & D Class I, Zone 2, Groups IIB+H2, IIB & IIA	
Temp Code (Sinewave / VFD)	T3C / T3

Additional Certifications

Other Certification

Additional Information


Bearings		Approx. Weight
DE	NDE	lbs
6312	6212	719

Nameplate Drawing

Optim JM

TYPE	AEHH8N JM	CAT. NO.	CJM0504		
OUTPUT	50 HP 37.30 kW	FRAME	326JM	TEFC	
R.P.M.	1770	POLE	4	INS.	F
VOLTS	230 / 460	PHASE	3	Hz	60
AMPS	113.8 / 56.9	CODE	G	S.F.	1.15
AMBIENT	40 °C	NOM. EFF. 94.50		MIN. EFF. 93.60	
BEARINGS	6312 / 6212			RATING Cont.	
SER. NO.	TBD	DESIGN	B	WT. 719 LBS	
PWM VFD DUTY	VT	CT	CP	S.F.	
	3-60Hz	6-60Hz	60-90Hz	1.0 Only	

Connection Diagram

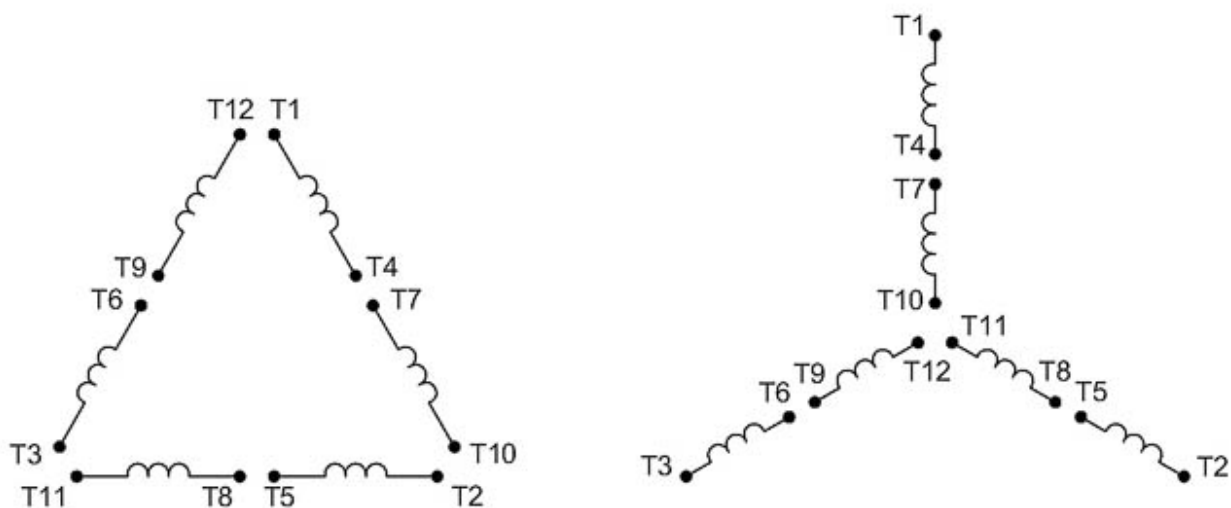

12 LEAD		DUAL VOLTAGE			WYE/DELTA	
VOLTAGE	CONNECTION	L1	L2	L3	JOIN	
HIGH	START	WYE	1	2	3	4&7,5&8,6&9 10&11&12
	RUN	DELTA	1,12	2,10	3,11	4&7,5&8,6&9
LOW	START	2 WYE	1,7	2,8	3,9	4&5&6 10&11&12
	RUN	2 DELTA	1,6,7 12	2,4,8 10	3,5,9 11	

WD_12YD