


# Standalone Assembly Instructions

Items included:

5x



M4 x 12mm  
socket head screw

3x



10-32 Wing nut

2x



#2233 key

2x




Push-in barrel key

4x




M8-1.25 x 16mm  
button head socket cap screw

5x




Bumper foot

1x

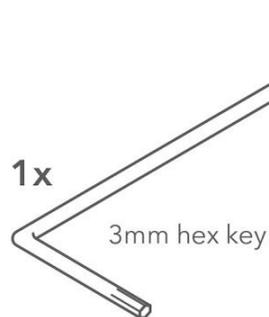

3mm hex key

1x

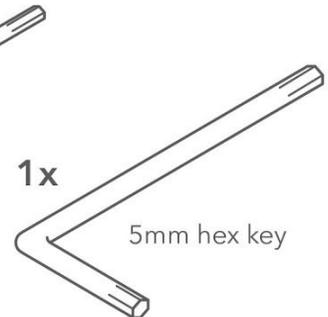


5mm hex key

Also includes:

- 6 ft. power cord (with ground)
- Cable ties


Items Required (not included):

- Tablet
- Tablet power cable provided by manufacturer (third-party cables may not fit)

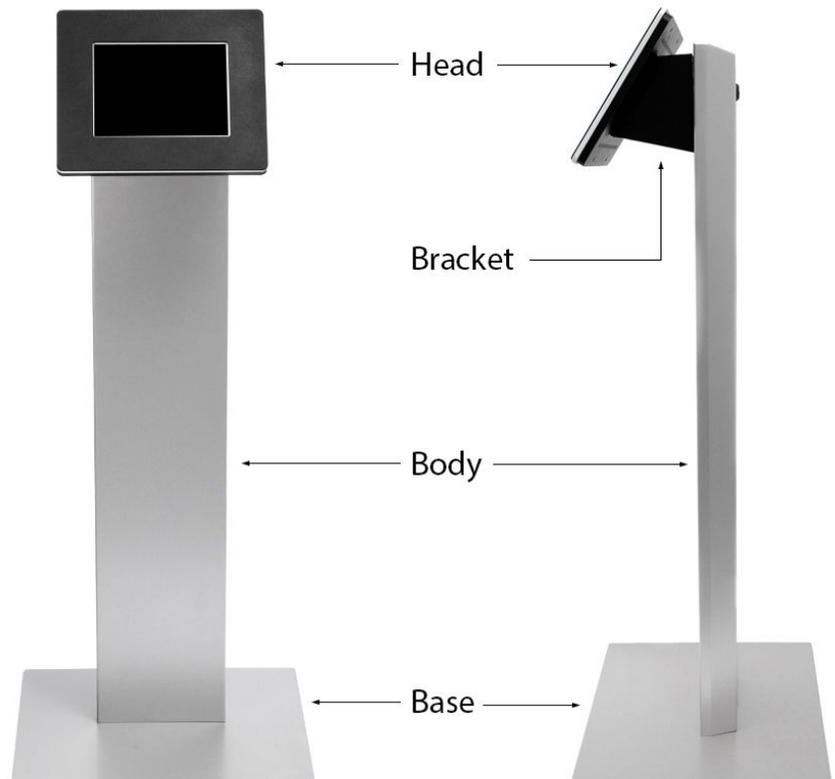

## Inserting your tablet into the head enclosure

1. Insert the key and unlock the barrel lock.
2. Lift the face of the enclosure away from the back by disjoining the internal clips.

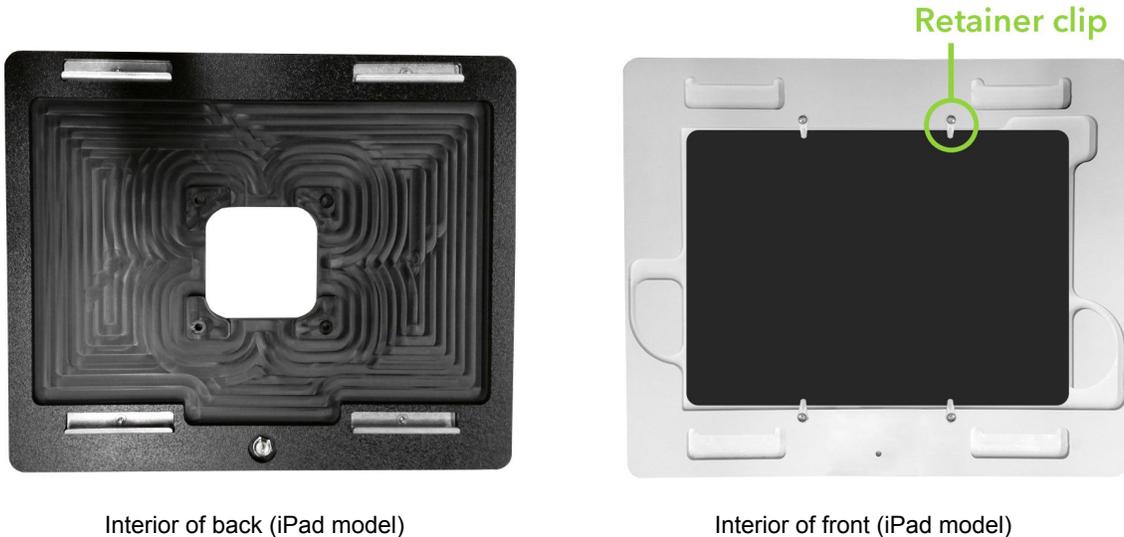


3. Insert the tablet's power cable into the tablet, along with any other necessary cables.
4. Turn the retainer clips so the tablet can be placed into the enclosure.
5. Place the tablet into the enclosure so that the cable ports line up with the cutouts.
6. Make sure the cables are not under the tablet, and press the tablet into the enclosure until it is seated all the way down.
7. Turn the retainer clips to secure the tablet.
8. Thread the cable(s) through the center hole of the back of the head enclosure.
9. Place the back onto the front so that the locking clips are joined, and slide the pieces together to align.
10. Push in the barrel lock to secure.

## Attaching the base to the body


1. Place the kiosk body on a soft, clean surface.
2. Align the holes of the base with the holes in the body so that more of the base is exposed in the front of the kiosk than behind.
3. Insert the four base bolts through the bottom of the base, into the body, and tighten with the 5mm hex key.
4. Attach bumper feet to the bottom of the base in each corner, about 1 inch away from the edge.

## Attaching the bracket to the head enclosure

1. Place the bracket on the back of the head so that the circle side is face down.
  - **For landscape orientation:** Position the bracket so the open side is facing away from the barrel lock.
  - **For portrait orientation:** Position the bracket so the open side is facing 90° from the barrel lock.

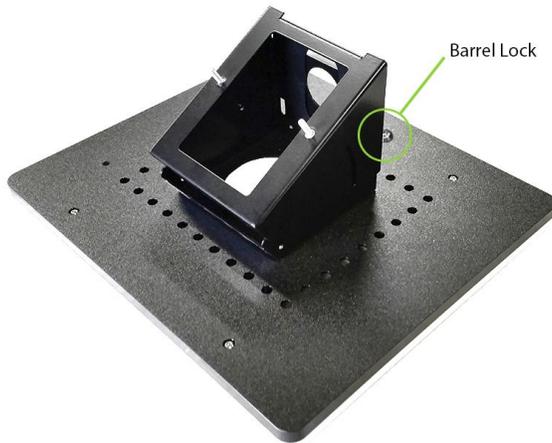

(landscape orientation)

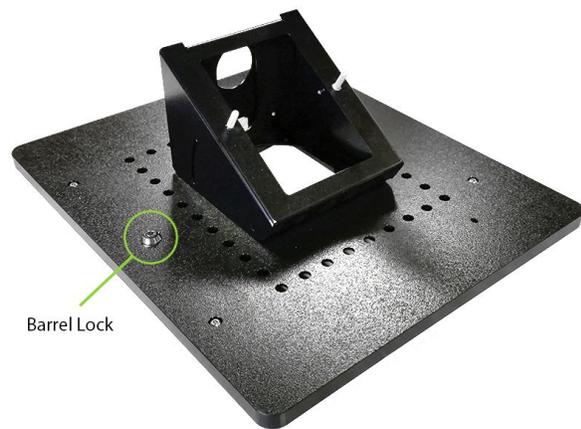

(portrait orientation)

2. Align the four threaded holes, insert the 12mm M4 socket-head screws with the M4 washers and tighten with the 3mm hex key.
3. Thread the cable(s) through the bracket.

## Attaching the head enclosure to the kiosk body

1. Remove the back access panel using the key.
2. Attach the bracket/head assembly to the front of the kiosk and thread the cable(s) through the opening in the kiosk body.
3. Attach the wing nuts and tighten.
4. Using the cable ties, attach the power cord to the interior of the body at the anchors.
5. Connect the tablet's power cable into the power cord.
6. Attach the back access panel to the kiosk, and thread the cable(s) through the small opening at the bottom of the panel.
  - **Note:** You can also keep the cables inside if you plan to mount the kiosk over an AC outlet on the floor using the holes to the sides of the base's center hole.
7. Insert the key and turn to locking position.