

UDF

DIESEL PERFORMANCE FILTERS

Installation guide for Amarok 2.0L & 3.0l



MP101 UDF diesel performance kit

2 x UDF diesel performance filter

1 x Mounting Bracket

2 x 11.8mm Quick connector fittings

2 x 9.89mm Quick connector fittings

4 x hose clamps

2 x 6mm rivet nuts

2 x 6 mm bolt and washers

2m 3/8 fuel hose

Tools required :

Drill 9mm drill bit

Phillips and flat screwdriver

Allen keys

Knife

10mm spanners





Fitting instruction

1. The UDF filter is mounted underneath the Amarok near the OEM filter—



2. Mount the bracket onto the channel by either using the 6 mm rivet nuts and bolts or self tapping screws provided as indicated in pic 2-3

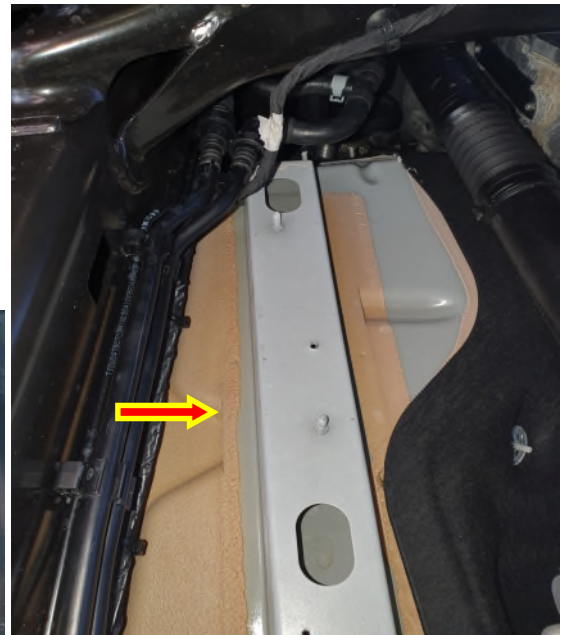

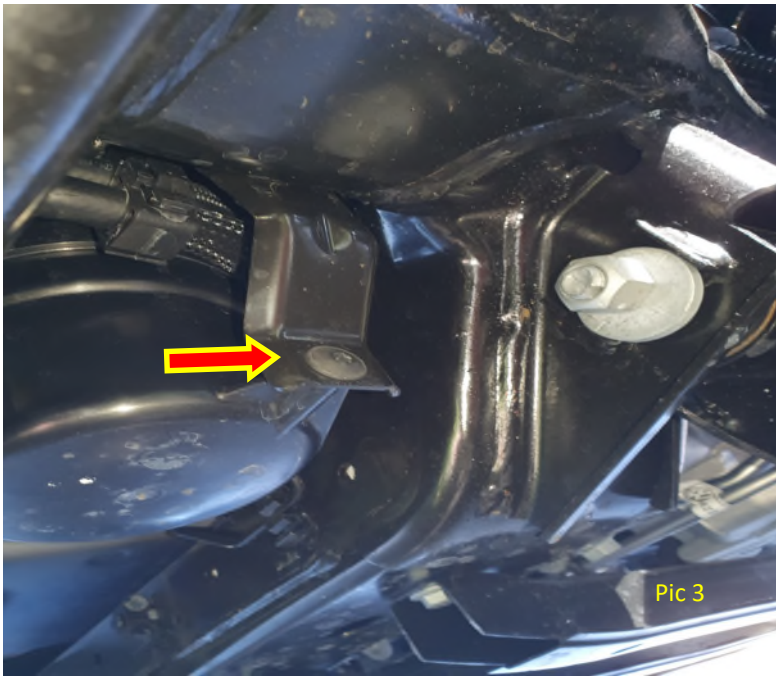

Pic 3

4. Remove hex bit screw to release OEM filter pull down and disconnect the quick connector from the output of the OEM filter as per pic 4—no1


5. Then using 1m x 3/8 hose fit the 11.88mm elbow quick connector and hose clamp to one end as per pic 5—NO1 then measure to the output of the OEM filter cut and fit the 9.89 elbow quick connector and hose clamp and then connect up to no1 in pic 4

6. Then using 0.5 m x 3/8 hose fit the 11.88mm straight female quick connector and hose clamp to one end and then measure to the quick connector that was removed from the OEM filter cut and fit the 9.89 male quick connector and hose clamp and connect up pic 4—no2

7. Prime the fuel system by turning on the ignition and waiting 30 sec do this twice (don't start the vehicle while priming).

8. Please check for leaks and ensure that all clamps are properly tightened and that pipes are cable tied to prevent damage

9. The engine is now ready to start.

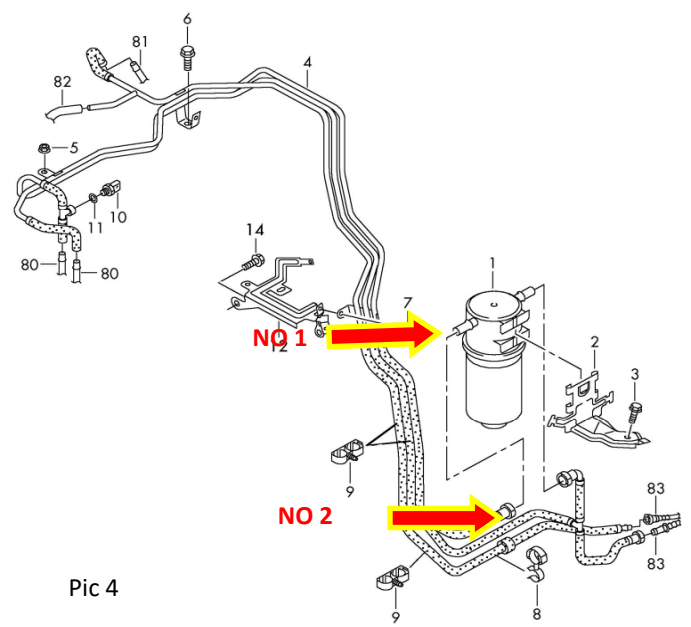

Pic 4



Pic 5

UDF Australia (Pty) Ltd

1300 920 529

Sales@udfaustralia.com