

Honda CRV 2012-2017  
Running Boards / Side Steps  
Fitting Guide

The logo for DIRECT4x4 features the word "DIRECT" in a bold, black, sans-serif font. The "4x4" portion is rendered in a vibrant green color. A stylized green arrow curves around the left side of the letter "D", pointing towards the right.

**DIRECT4x4**

## 1: Parts List

Parts	Quantity
Front Bracket	2
Middle Bracket	2
Rear Bracket	2
10mm T Bolt and fixings	2
8mm T Bolt and fixings	8
10mm Bolts and fixings	2



Please check all of the fixings you have received.

If you think you are missing any of the components in the list above, please contact Direct 4x4 for further advice.

## 2: Preparation

Remove the rear plastic under shield on both sides.



Undo the fixing bolts

3: Fitting the brackets.

3.1: The rear brackets




Using the T Bolts and fixings provided fit into the chassis holes shown in the pictures

### 3: Fitting the brackets.

#### 3.2: The Middle brackets

The middle bracket doesn't need to be fitted as the front and rear brackets are strong enough, however here are the instructions if you wish to fit it for your peace of mind.

There are two holes, one without a thread – the T Bolt needs fitting here. The second hole is threaded and this is meant for the hex bolt – however we advise not to fit this hex bolt as it causes the brackets to come out of alignment.

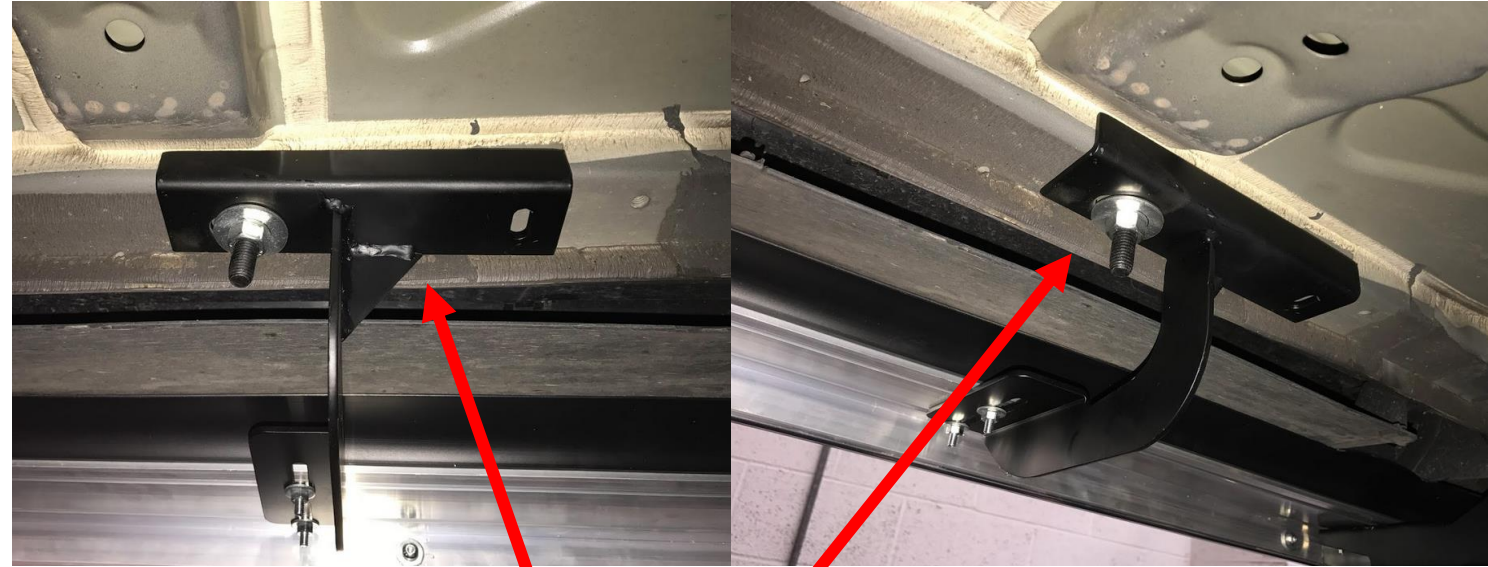

For the fitting only use the T-bolt and put it in the non threaded hole, this will be enough to secure the bracket in place.



### 3: Fitting the brackets.

#### 3.3: The Front brackets

The front brackets fit to the original holes in the chassis pictured below, using the T bolts and fixings supplied.



#### 4: Advice

If you would like more detailed instructions, we have a fitting video available on our website and YouTube. We are also able to talk you through the fitting over the phone, so if you have any questions or problems with the fitting please do contact us.

We advise that after a little while you check that the fixings are still firmly in place and haven't come loose – if they have you will need to tighten these up again.

We also offer a fitting service down at our depot in Derby on our opening days Monday – Friday. We do need a weeks notice to make sure we can book you in for the time you want as we have a lot of bookings. You can enquire about our fitting slots available via phone or email.

Please check for any damage on the side steps before fitting and contact us if there are any problems, as if they are fitted when they are damaged we are not able to accept liability for them.