

Fitting Instruction

Side Steps for the Land Rover Range Rover Sport 2005-2013

Product Care :

- Carefully read the instruction sheet before installing. Take good care of your vehicle when installing to prevent any scratches.
- Please remember the location of each component that you are removing from the vehicle before installation and make sure these are in the correct position after installation.
- Check periodically to see if there are any loose bolts and nuts to ensure safe driving.


Function and Features:

- It will be more convenient for customers to get in and out and help to protect the vehicle.
- The side steps fit perfectly to the vehicle contour and it gives the car a completely new look.
- Easy installation, using the original holes in the vehicle, without any need for drilling.

Parts List:

NO	Name	Qty	Specification	NO	Name	Qty	Specification
○1	Side Steps	2		○7	Spring Washer	7	8mm
○2	Front Brackets	2		○8	Plastic Buckle	7	Φ8
○3	Left Rear Brackets	1		○9	T-bolts	7	M8x40
○4	Right Rear Brackets	1		⑩			
○5	Hex Nut	7	M8				
○6	Big Washer	7	8mm				

Installation Picture

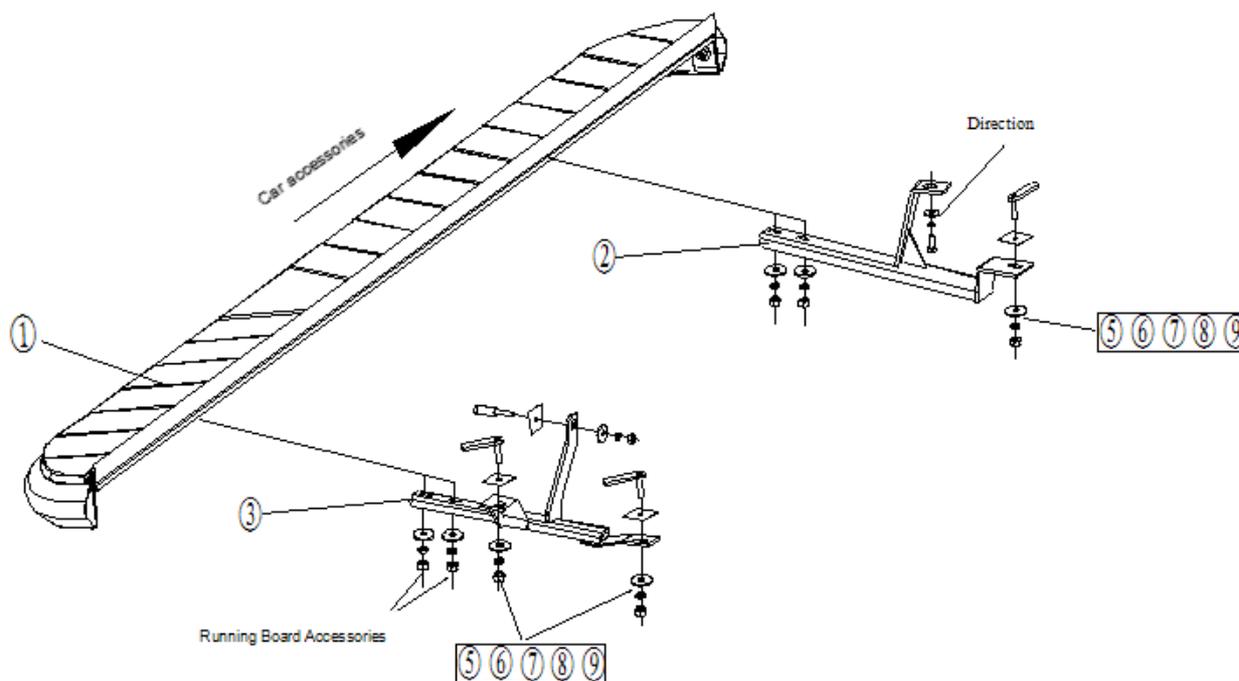


Left Side Installation Picture

Assembly Procedure:

Step One: Check all the contents are available in accordance with the above list.

Step Two: Distinguish left and right brackets according to the word stamped in the brackets. Put assorted nuts and bolts together to make sure the installation is efficient.

Step Three: Install front brackets, referring to picture one. Find the front mounting points underneath the chassis and fix part number ⑧ (Φ8 plastic block) to part number ⑨ (T bolt). Fix part number ⑨ into the two holes, reusing part numbers ⑤⑥⑦ from the chassis- don't tighten the bolts yet (the left and right bracket are fitted in the same way).

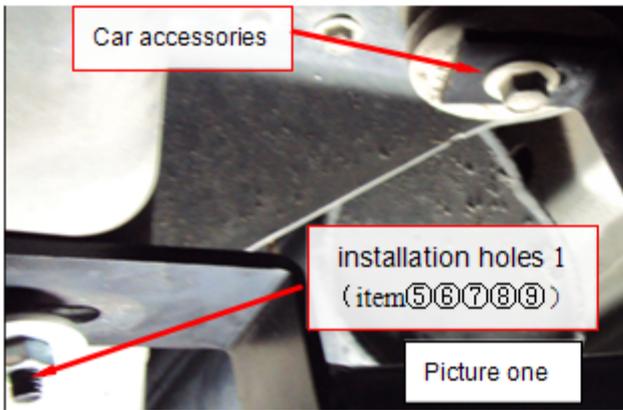


Step Four: Install Left rear brackets, referring to picture two. Put the ⑧ (φ8 plastic block) mounted to ⑨ (T bolt), put part number ⑨ into the two hole positions, reuse parts ⑤⑥⑦ of the chassis pieces, don't tighten the bolts yet (the left and right bracket are fitted in the same way)

Step Five: Install Left rear brackets, referring to picture two. Fix part number ⑧ (φ8 plastic block) to part number ⑨ (T bolt) and then put the ⑨ into the two hole positions, reusing parts ⑤⑥⑦ of the bracket is fixed on the bottom, don't tighten (left and right brackets are fitted in the same way)

Step Six: Referring to the installation picture, fix the side steps to the brackets using bolts and nuts.

Step Seven: Position the side steps to a suitable height, tightening all the screws.

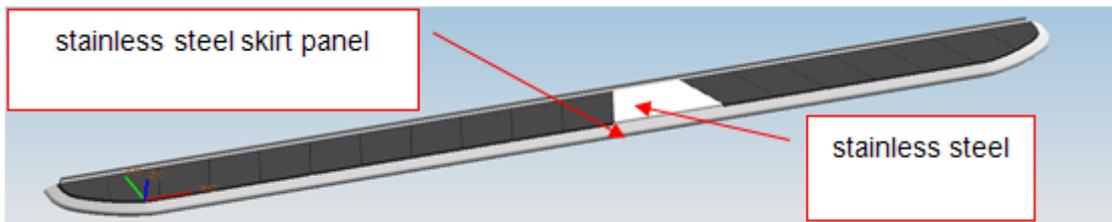

Step Eight: Check that all screws in position, and make sure all screws are screwed tightly. Installation is now finished.

DISCLAIMER: We are not responsible for any quality problems caused by improper installation and use. Do not use any type of polish or wax that may contain abrasives that could damage the finish; we are not responsible for any damage caused by chemicals used in car washes or other car cleaning facilities or products. We recommend using soapy water to clean these steps.