


DIRECT4x4

Audi Q5 2017 Onwards (After Market) Side Step Fitting Guide

1: Parts List

Part Name	Quantity
Side Steps	2
Front Brackets	2
Rear brackets	2
T-Bolts	8
Washers	8
Spring Washers	8

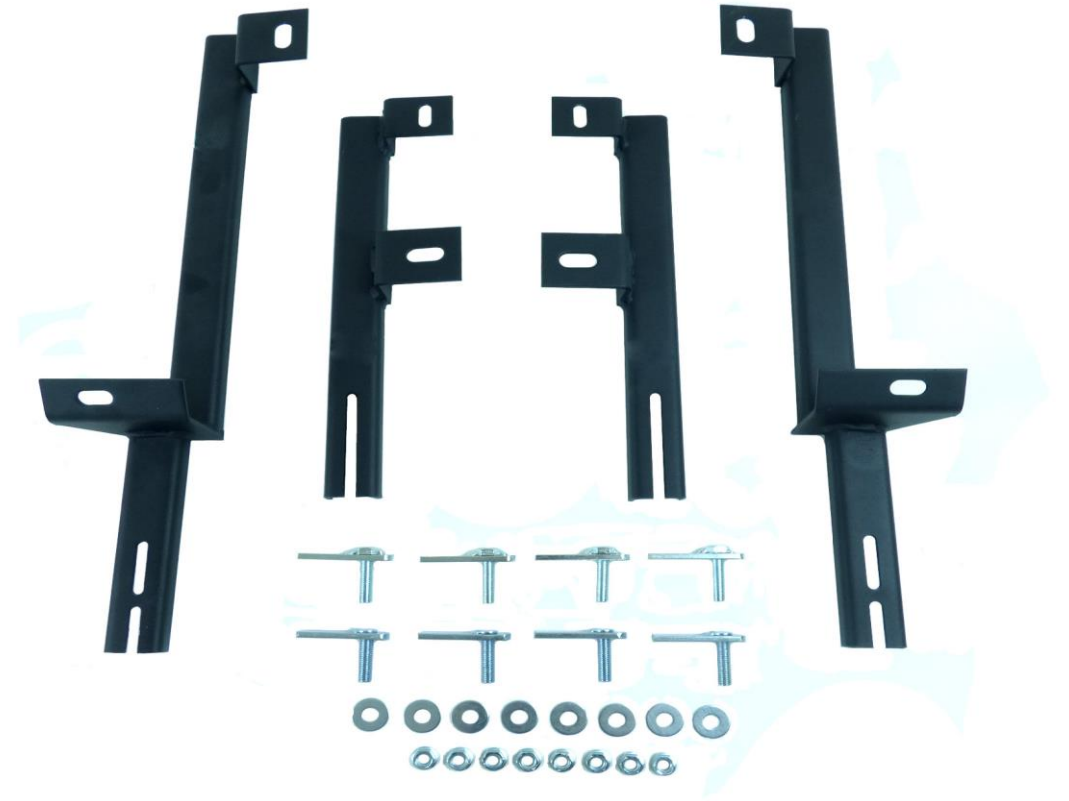

Please ensure that you have received all of the components listed above before fitting. If you believe there is anything missing, contact us for assistance.

2: Fitting the Brackets (FRONT)



Remove the bung in the sill, place the t-bolt into the hole. However you may have to bend the top lip of the bracket to a 90 degree angle in order for the bracket to fit tight into the sill. (This is only a temporary problem as our manufacturers are working hard to amend this design as soon as possible)



Remove the grommet in the chassis place the t-bolt into the hole and tighten up.

3: Fitting the Brackets (REAR)


Remove the two bungs in the chassis at the rear of the vehicle as shown.
(Again this bracket has been manufactured slightly too short and you will have to slot the hole at the rear part of the bracket we are working with our suppliers to rectify this problem)

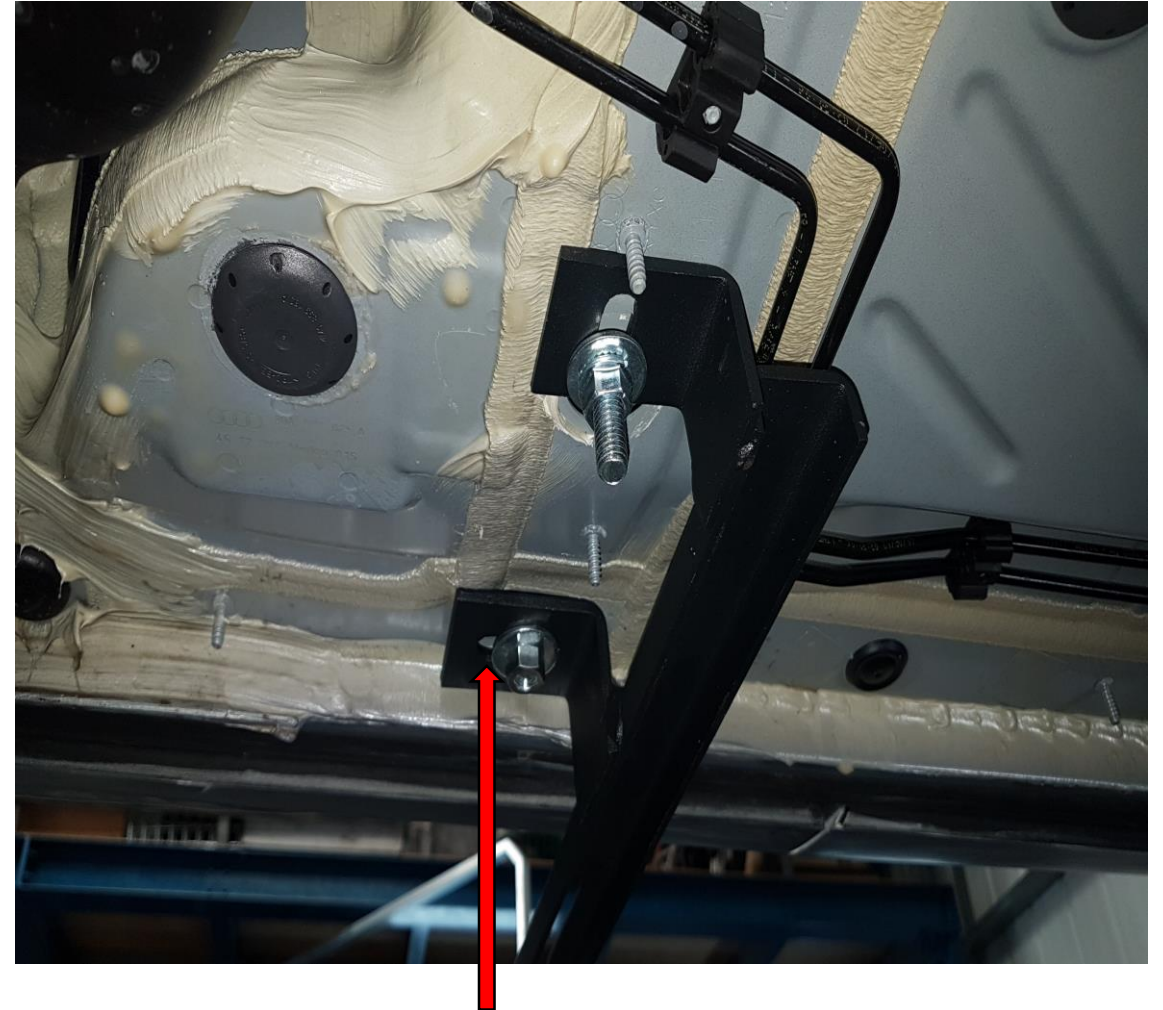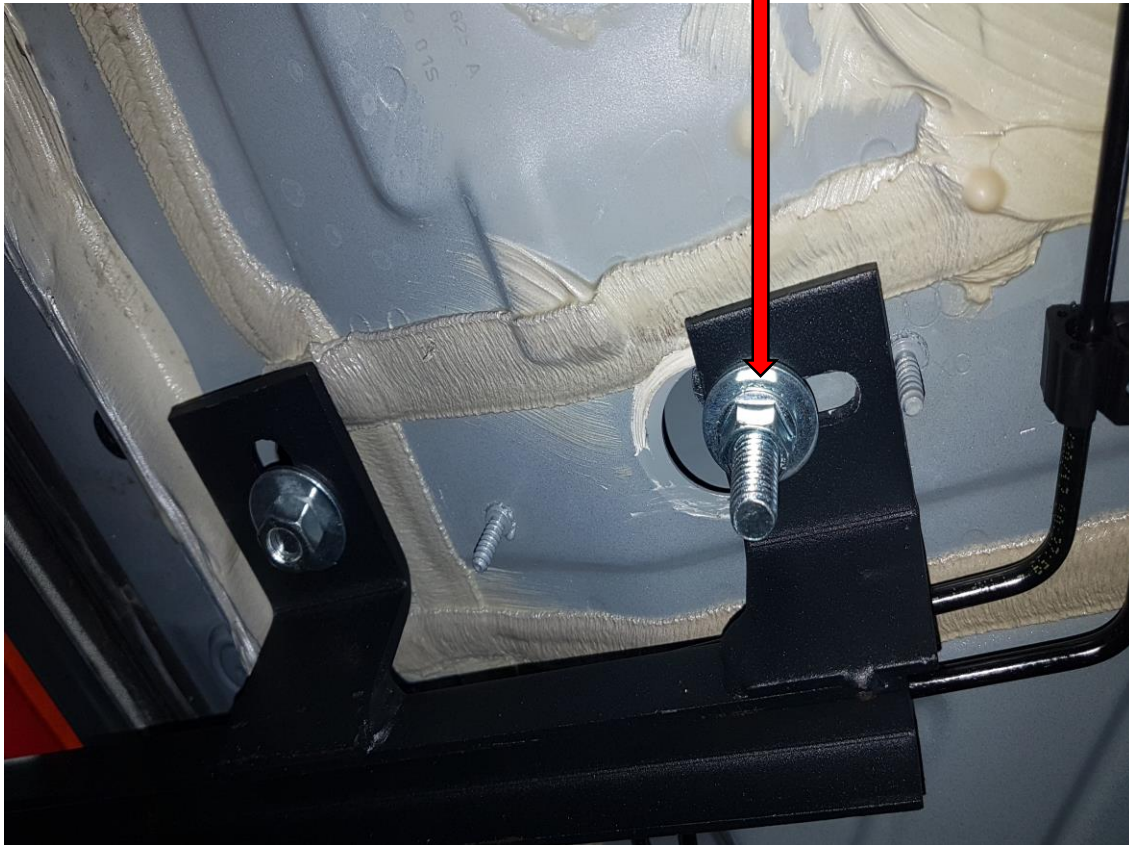

Remove the bung near the sill, place the t-bolt into the hole and tighten up both bolts.

4: Fitting the Brackets (EXTRA)

On the side step, slide the bolts down the channel to line up with the brackets, when in place offer the steps up at a 45 degree angle. This will allow you to get rubber seal to the back of the sill. Because of only having two brackets there are only four fixing points so you can tighten two down to stop any noise.

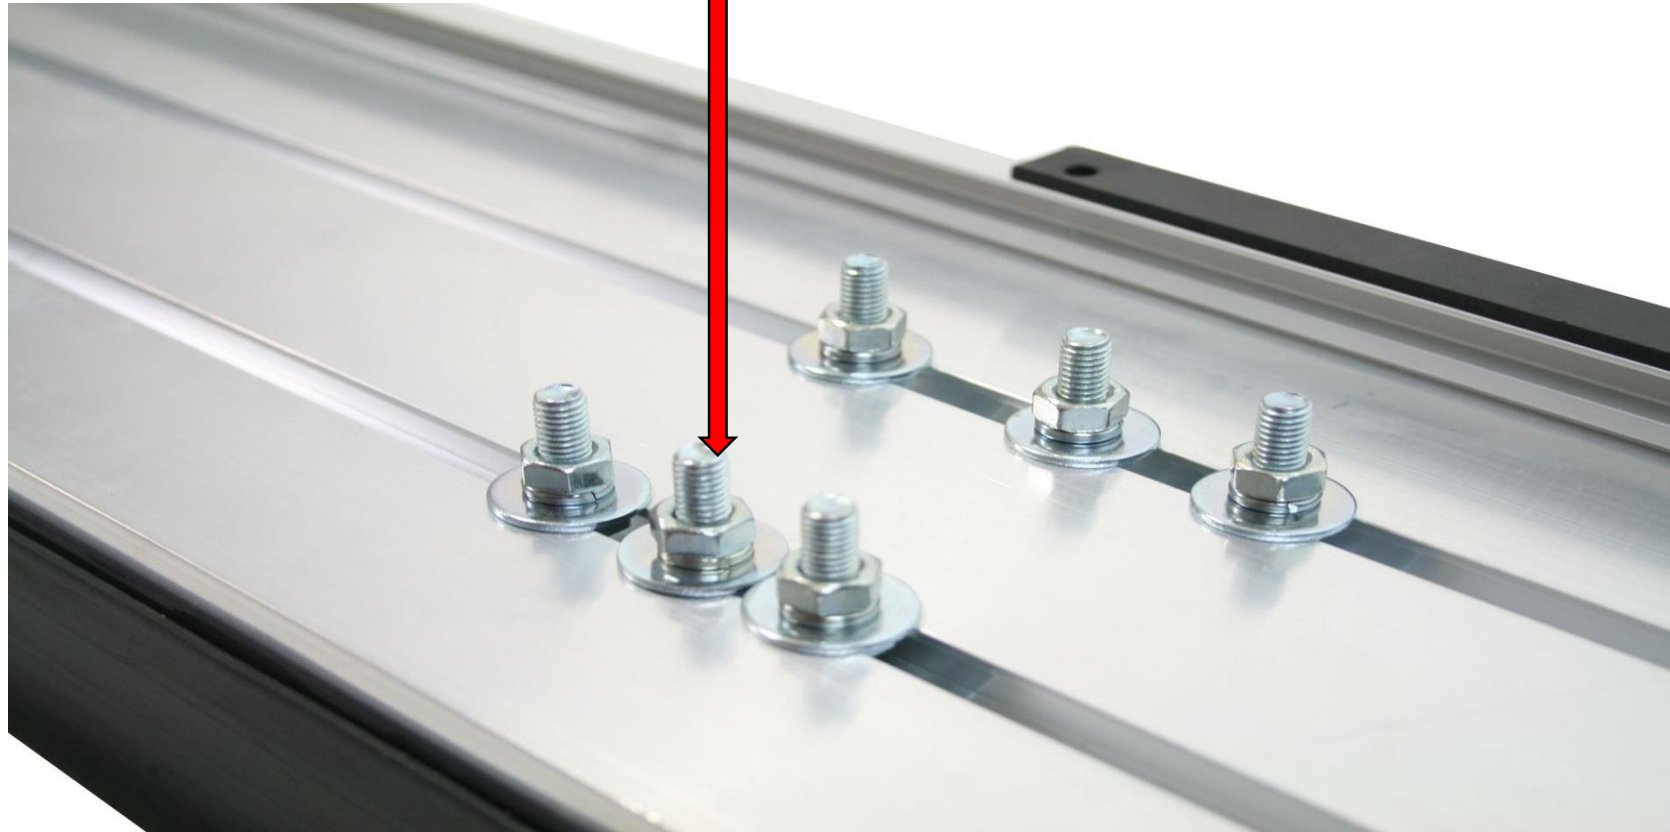

General Care & Maintenance

!IMPORTANT!

We strongly advise you check under the car at several intervals after the initial fitting to ensure safety. After 7 days, check and tighten any bolts and we recommend inspecting the bolts, brackets and boards at least once every 6 months.

Cleaning Information

You can use most cleaning on these side steps. However, we strongly advise against using petrol based solutions or corrosive cleaning solutions which include TFR (Traffic Film Remover) or similar chemicals (brake strippers etc.) These will tarnish and possibly even corrode parts of the steps.

When cleaning underneath the side steps, be mindful of any protruding bolts or sharp edges, especially at the ends of the boards.

To increase the lifespan of your new side steps, we recommend occasionally cleaning the actual brackets.