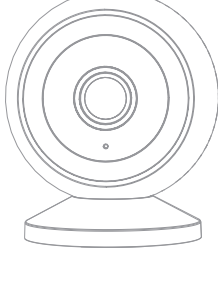


USER MANUAL

B5 OUTDOOR
SECURITY CAMERA

For more setup instructions and video tutorials,
please scan the QR code on the left or visit:
www.laviewusa.com/pages/b5



PRODUCT WARRANTY CARD

Your LaView product is protected by a 1-year warranty from the purchase date. For more information on repairs, exchanges, and other policies, please visit www.laviewusa.com.

Please send all inquiries through the Contact Form on our website, or email us at info@laviewusa.com. And our technicians would be glad to assist you.


CATALOGUE

002	WHAT'S IN THE BOX
003	APP SETUP
006	INSTALLATION
007	TROUBLESHOOTING
008	MOTION DETECTION
009	OTHERS
011	FCC COMPLIANCE
012	CUSTOMER SERVICE
013	PARAMETER
Back cover	PRODUCT WARRANTY CARD

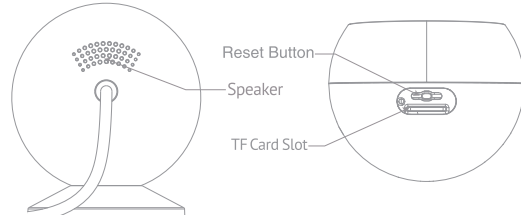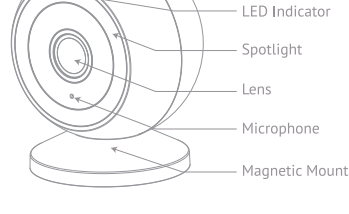

WHAT'S IN THE BOX

PLEASE CONSULT THIS CHECKLIST FOR ALL PARTS.

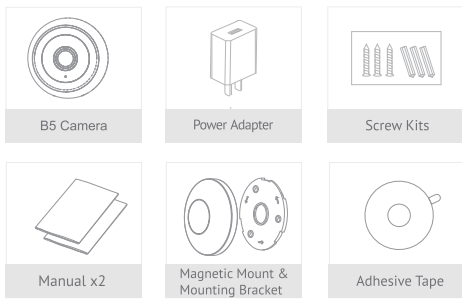

RESET

- Press and hold the reset button for 5 seconds to reset the device (Camera will return to factory default settings followed by a welcome ringtone.) Wait until the camera is beeping every 15 seconds which means the camera is ready for pairing. If the camera is not beeping, reset the camera again.

LED INDICATOR


- Slow Flashing Light: Initializing/ Ready for Wi-Fi setup
- Fast Flashing Light: Currently connecting/Network Error
- Solid Light: Network is properly connected

APP SETUP

For step-by-step Mobile APP setup instruction, please read the Quick Start Guide included in the package or check out our Youtube tutorials

1 DOWNLOAD AND INSTALL APP

- LaView APP is available for both iOS and Android OS. Search the name 'LaView' in APP Store or Google Play. (The other LaView apps, such as LaView Connect, LaView ONE, LaView Life do NOT support B5 camera)



- Please download the LaView APP from the App Store or Scan the QR Code below




2 MAKE SURE YOUR PHONE IS CONNECTED TO A 2.4GHZ WI-FI NETWORK

3 COMPLETE THE APP REGISTRATION PROCESS


4 FOLLOW THE IN-APP INSTRUCTION TO PAIR THE CAMERA

- Click on the '+' sign to add the camera. Continue to click "Video Surveillance" > "Smart Camera"
- Connect the camera to power via included USB Charger (If you are not setting up the camera for the very first time, press the Reset button instead for 5 seconds until you hear a sound.)

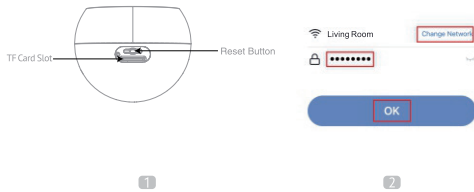

- Wait until the camera is beeping twice every 15 seconds, which means the camera is in stand-by status and ready for pairing
- Enter the Wi-Fi Password to generate a QR code that carries your Wi-Fi information

- Use the camera to scan the QR code on the phone (keep the camera 8-12 inches away from the phone)

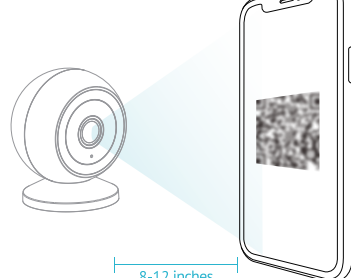

- Press 'I Heard a Prompt' after the camera receives the QR code and beeps. The camera will start pairing


- When connecting, you should make sure your router, mobile phone, and camera are as close as possible

- Wait until the camera is connected online

- Customize the camera name to differentiate cameras in different locations and finish pairing process

- If the pairing is not successful, press the Reset button for 5 seconds until you hear a beep and start again. Or check the FAQ section for more troubleshooting steps

INSTALLATION

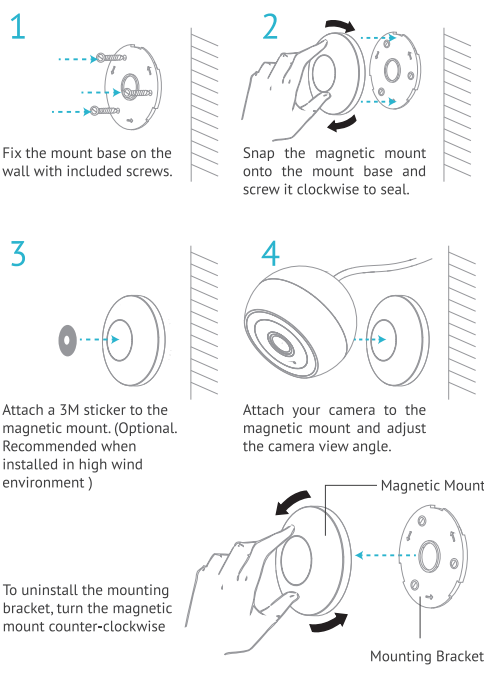

Attach a 3M sticker to the magnetic mount. (Optional. Recommended when installed in high wind environment)


To uninstall the mounting bracket, turn the magnetic mount counter-clockwise

Magnetic Mount
Mounting Bracket

TROUBLESHOOTING

IF YOU CANNOT CONNECT THE CAMERA TO THE INTERNET, CHECK THE FOLLOWING STEPS

- Ensure you are connecting to a 2.4GHz Wi-Fi not 5GHz

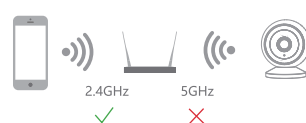

- Ensure Wi-Fi password or SSID is correct
- Ensure the camera is placed as close to the router as possible
- Ensure the camera is powered on and is beeping twice every 15 seconds before scanning the QR code
- Ensure you are using the correct APP (LaView)
- Ensure the camera is scanning the QR code on the phone in the correct way
- If the above doesn't help, reset the camera and start pairing again

WHAT CAN I DO IF THE CAMERA STOPPED WORKING?

- Close and restart the APP

- Check if Wi-Fi settings is changed. If so, please reset the camera
- Ensure the router is powered on and online
- Ensure the camera is powered on
- Ensure the router has decent network bandwidth
- Check the app is on the latest version

MOTION DETECTION

HOW TO TURN ON AND OFF MOTION DETECTION?

- To turn on or off motion detection and Human detection setting, go to the camera menu and click on Detection Alarm Settings

WHAT CAN I DO IF I CANNOT RECEIVE NOTIFICATIONS?

- Ensure your phone notification setting is enabled for LaView APP
- Ensure the camera has decent network
- Ensure the camera is online

WHAT CAN I DO IF I RECEIVE TOO MANY NOTIFICATIONS?

- If the camera is placed at a location with heavy traffic, we recommend you relocate it to a place with less traffic to receive fewer alerts

OTHERS

WHAT CAN I DO IF THE IMAGE IS NOT CLEAR?

- The camera is equipped with 2K Full HD lens and sensor to produce superior image, however the image quality may be affected by the lighting condition

- Ensure the camera is NOT facing to environment with poor lighting condition or with extreme high contrast. Ensure it is NOT facing directly to bright lighting source such as sun light

- Ensure your phone and your router has enough bandwidth to stream HD video. A minimum of 2Mbps is required to stream each 2K camera. If the network does not meet this requirement, the live-view stream will be downgraded to SD automatically

NIGHT VISION

- The camera is equipped with Infrad LED technology to capture black and white night vision image in detail at night. However, the night vision image quality may be affected by the following factor:
- There are high contrast light sources such as car headlight pointing to the camera

B5 is equipped with star light sensor and Infrared LEDs to offer 4 night vision modes

Infrared Mode: LED emits Infrared light and produces black and white image at night. Works in pitch black

Color Night Vision (Spotlight off): Produce starlight grade color night vision, but requires some ambient lighting such as street lights

Color Night Vision (Spotlight on): Produce full color night vision even in pitch black condition

Smart Mode: Image set in black & white night vision but switch to color night vision mode automatically when a motion is detected

WATERPROOF AND OUTDOOR USE

- The camera is IP65 rated for totally dust tight and protection against low-pressure jets of directed water from any angle. The camera can operate between 14°F ~ 122 °F for all weather use. We recommend to place the camera under the eave and avoid heavy rain or snow to maximize camera life span
- For more technical questions or tutorials such as Alexa setup, Cloud Storage setting, please follow in-APP tutorial section in the LaView APP or visit our Youtube tutorials
- We proudly offer a 1-year warranty on all of our products. This warranty extends to the original purchaser only and is non-transferable
- If you wish to return a product within the return period, please message us directly in your Amazon account or on our website

FCC COMPLIANCE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1- this device may not cause harmful interference,

2- this device must accept any interference received, including interference that may cause undesired operation.

The manufacturer is not responsible for any radio or tv interference caused by unauthorized modifications or change to this equipment. Such modifications or change could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

To maintain compliance with FCC's RF exposure guidelines, this equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

CUSTOMER SERVICE



LIVE CHAT:

In LaView APP or on laviewusa.com

Email: info@laviewusa.com

Our professional technicians are committed to reply all your requests within 24 hours



If you purchased from Amazon, you can also contact our professional customer service team in your Amazon account

PARAMETER

Camera	
IR Distance	33ft
Lens	3.6mm
Day & Night	IR Cut Filter with Auto Switch
System	
Processor	High-Performance Embedded SOC Processor
Wireless	Built-in 2.4G Wi-Fi
Audio	
Input	Built-in Omni-direction Microphone
Output	Built-in Loudspeaker
Video	
Compression Standard	H.265
Max. Resolution	2560x1440
Frame Rate	20fps
WDR	DWDR
Interface	
Cloud Storage	LaView Cloud Storage
Interface	
Local Storage	Micro SD Card (Max. 128G)
PIR	PIR Motion Sensor
General	
Operating Conditions	14°F ~ 122 °F (-10°C ~ 50°C) Humidity 95% or Less (non-condensing)
Power Supply	5V DC, 1A
Power Consumption	Max. 5W
Ingress Protection	IP65