



# Door Visor

## Installation Manual

This manual describes how to install and handle the Door Visor.  
Read this manual carefully before work and make sure to install it correctly.

### Precautions


1. Observe precautions for installation described in this manual carefully and make sure to follow them during installation.  
Failure to follow the instructions may result in the product to fall or become stripped off. It may also impair the functionality of the vehicle.
2. Never use thinner on the Door Visor as it may tarnish its surface. Also, be careful not to let flame in a close range as it may cause deformation.
3. If the atmosphere temperature is 15°C or lower, use a dryer or an infrared lamp to heat the double-sided tape and the attaching part of the Door Visor main unit to about 25 to 40°C.  
Do not heat it partially as doing so may cause deformation. Do not use a dryer for industrial use.
4. After installing this product, let it sit for about 2 to 3 hours, and do not drive the vehicle during this time.  
Also, do not let the car be washed or exposed to rain, etc. for 24 hours.

Door Visor

Genuine part number: F0010VA000  
Applicable model: LEVORG ('16MY)

Components

No.	Part Name	Quantity
(1)	Door Visor Front RH	1
(2)	Door Visor Front LH	1
(3)	Door Visor Rear RH	1
(4)	Door Visor Rear LH	1
(5)	Bracket (metal parts package)	8

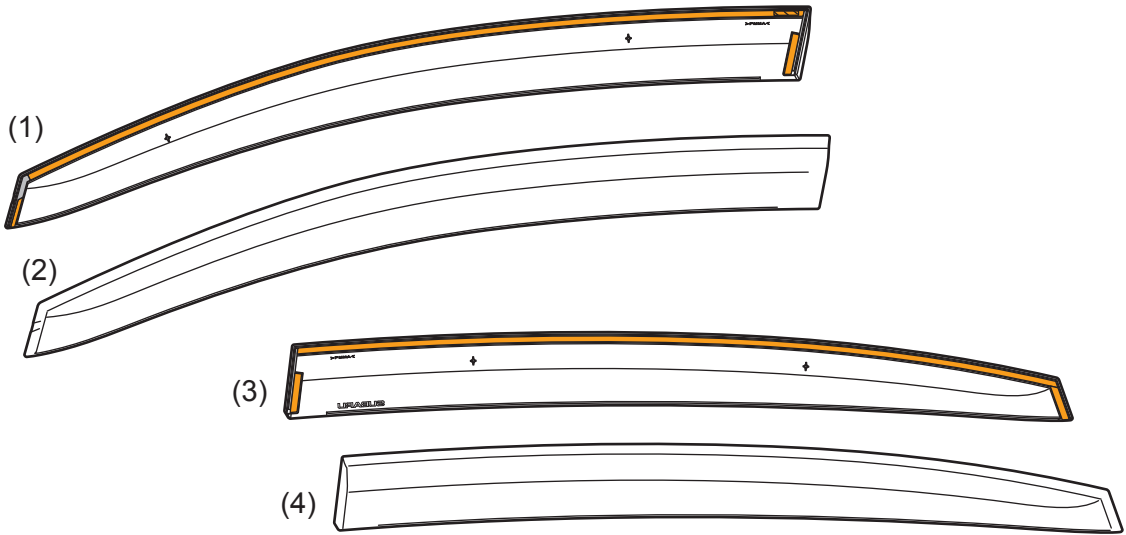



Bracket (metal parts package)



Tools

- |  |                             |
|--|-----------------------------|
| - Waste cloth                          | -> Used in [Fig.4] [Fig.10] |
| - Neutral detergent (or washing agent) | -> Used in [Fig.4] [Fig.10] |
| - Dryer                                | -> Used in [Fig.8] [Fig.14] |

## Installation Completion Illustration

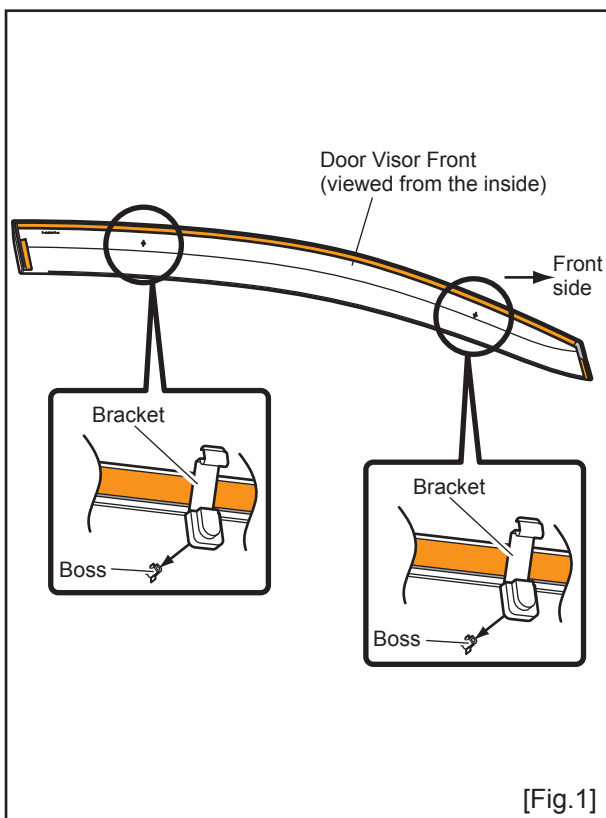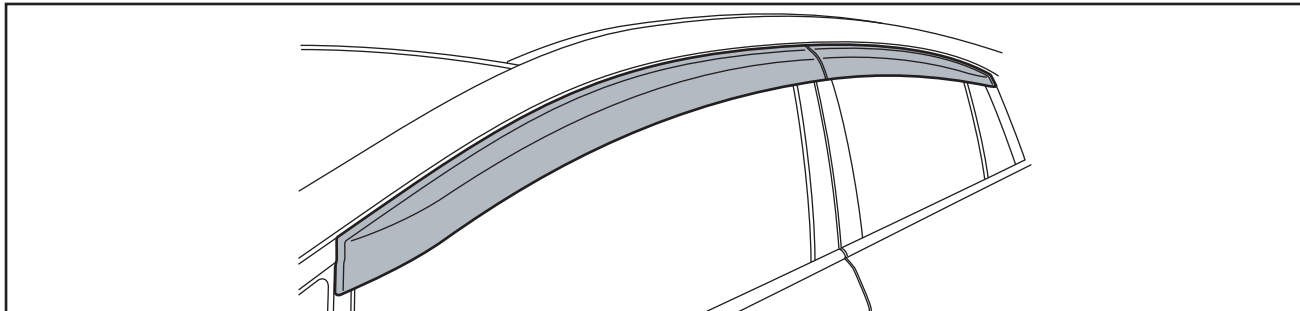

## Installation Procedure (Installation on the LH side is described.)



Caution

- To perform the installation safely, park the vehicle on a level ground with enough space for work. To keep the vehicle from moving, stop the engine and apply the parking brake.

## Preparation



### 1. Installing the Bracket

- (1) Insert the bracket into the boss on the inside of the Door Visor Front. (2 places)  
[Fig.1]



Caution

- Install the bracket perpendicularly to the sticking surface of the double-sided tape.

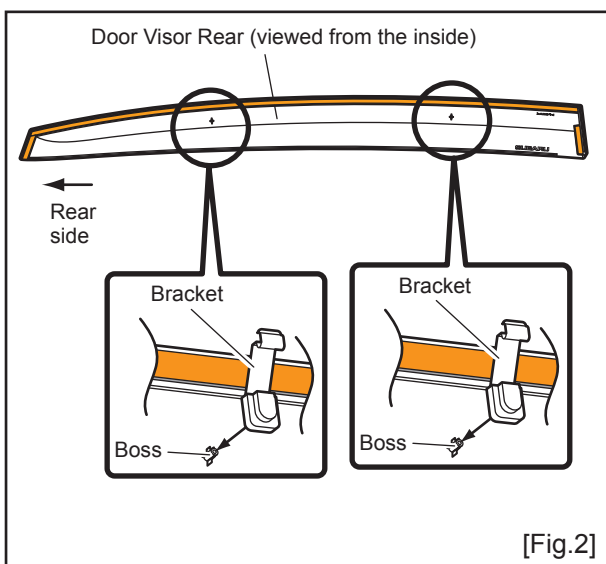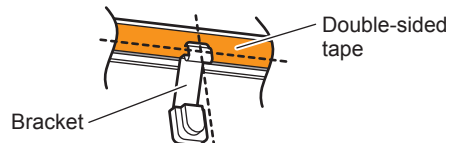



- (2) Insert the bracket into the boss on the inside of the Door Visor Rear. (2 places)  
[Fig.2]



Caution

- Install the bracket perpendicularly to the sticking surface of the double-sided tape.

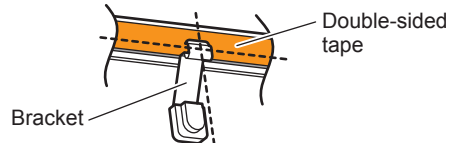


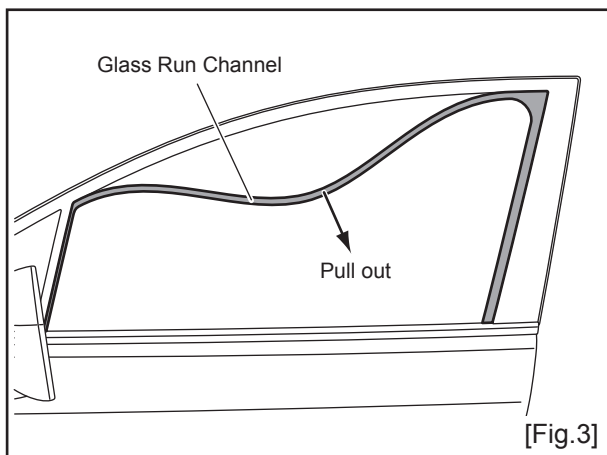


## 2. Preparing for Installing the Door Visor Front

- (1) Open the front door and window fully and pull out the Glass Run Channel.  
[Fig.3]

<p>⚠ Caution</p>	<ul style="list-style-type: none"> <li>- If the room lamp is illuminated, turn it off.</li> <li>- When pulling out the Glass Run Channel, do not apply force partially to prevent the Glass Run Channel from breaking in the middle.</li> </ul>
----------------------	---

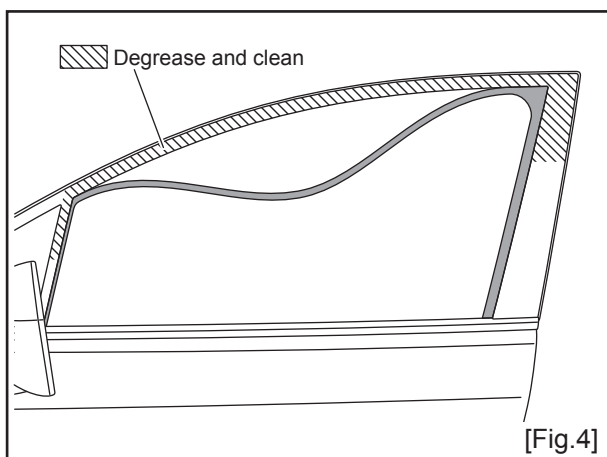


- (2) Clean off dirt and wax on the Door Visor Front installation part (shaded area in Fig.4) using neutral detergent (or washing agent) and let it dry completely.  
[Fig.4]

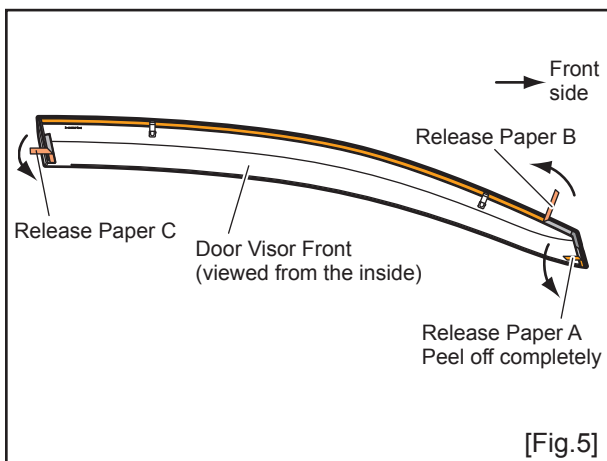

- (3) On the inside of the Door Visor Front, peel off Release Paper A completely from the end of the double-sided tape. For Release Paper B and C, peel off about 3 to 10cm from their ends and have them folded to the outside.




<p>⚠ Caution</p>	<ul style="list-style-type: none"> <li>- Be sure to peel off the release paper as in Fig.5 to prevent it from ripping during installation.</li> </ul>
----------------------	---

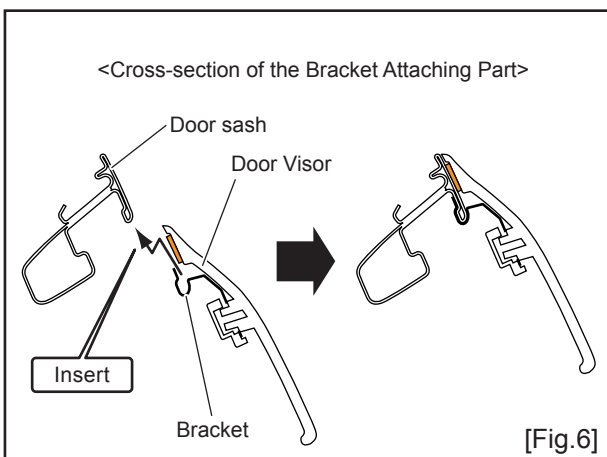

### Installation

## 3. Installing the Door Visor Front

- (1) Insert the tip of the bracket attached in Step 1-(1) into the sash of the front door. [Fig.6] [Fig.7]

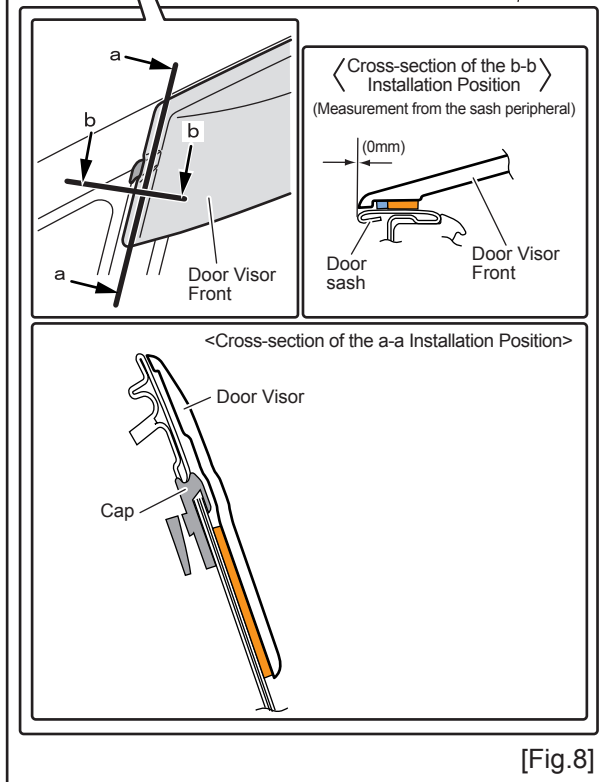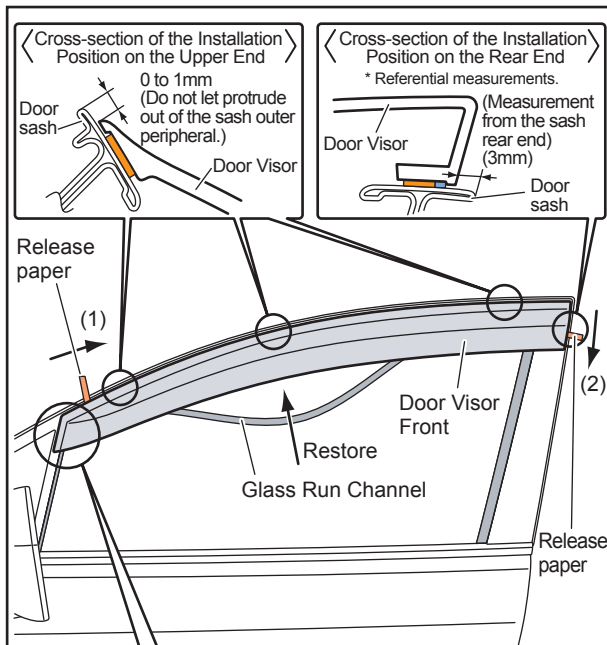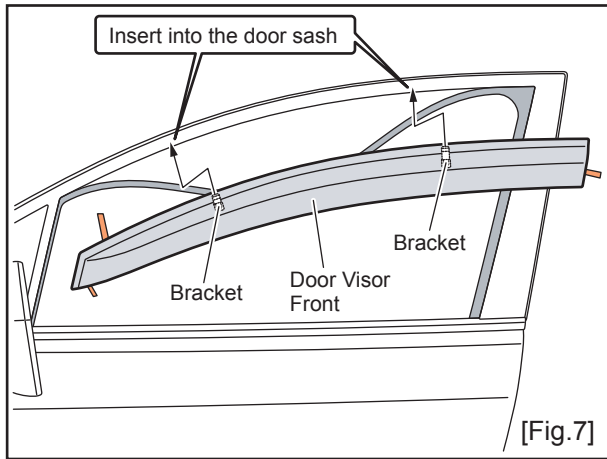

- (2) When performing Step 3-(1), align the Door Visor's end with both ends of the front door sash, and adjust the position so that it does not protrude out of the outer peripheral of the sash.  
[Fig.8]




- Attach the Door Visor taking care it does not protrude out of the outer peripheral of the sash. If it protrudes out, it may interfere with the vehicle parts or may cause injury.


- (3) While holding it in place, peel off and remove release paper in the order of (1) -> (2) in the illustration. When doing so, be careful that the release paper does not get ripped in the middle.  
[Fig.8]
- (4) Press the entire surface of the double-sided tape onto the front door sash to apply it firmly.  
[Fig.8]



- When applying the double-sided tape onto the pillar sash on the rear side of the front door, directly press on the back side of the sticking surface of the double-sided tape of the Door Visor.

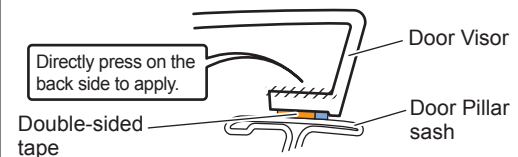

- (5) Restore the Glass Run Channel. This completes the installation.  
[Fig.8]
- (6) Install on the RH side in the same way.
- (7) If the surface of the Door Visor is dirty after installation, clean it with a waste cloth.

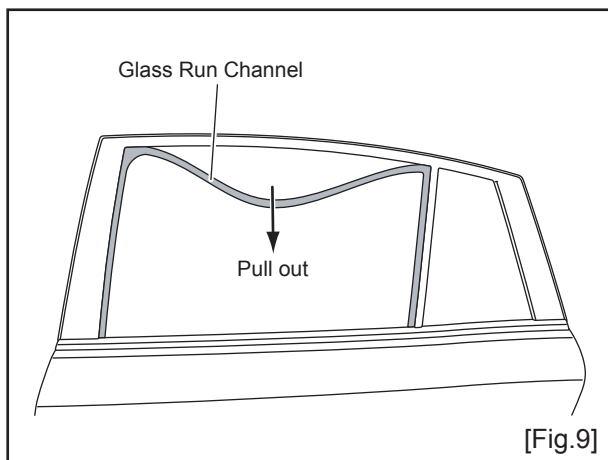


**Preparation** (Installation on the LH side is described.)


#### 4. Preparing for Installing the Door Visor Rear

- (1) Open the rear door and window fully and pull out the Glass Run Channel.  
[Fig.9]

<p>⚠ Caution</p>	<ul style="list-style-type: none"> <li>- If the room lamp is illuminated, turn it off.</li> <li>- When pulling out the Glass Run Channel, do not apply force partially to prevent the Glass Run Channel from breaking in the middle.</li> </ul>
----------------------	---

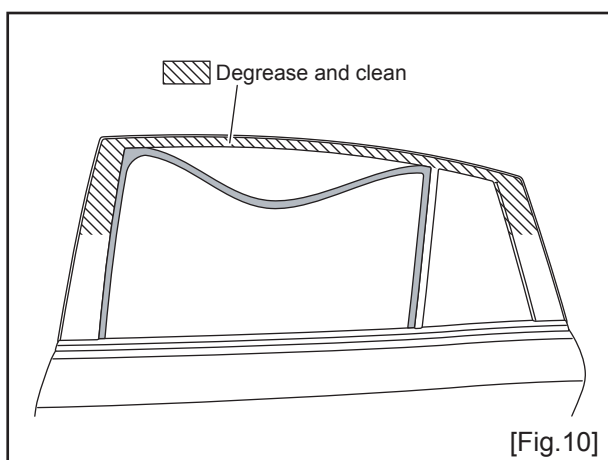


- (2) Clean off dirt and wax on the Door Visor Rear installation part (shaded area in Fig.11) using neutral detergent (or washing agent) and let it dry completely.  
[Fig.10]

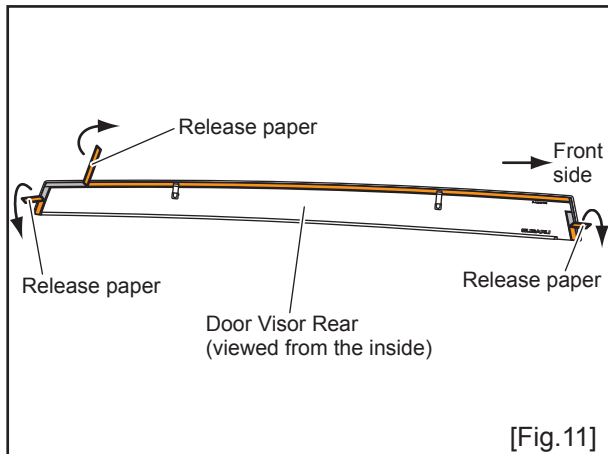

- (3) On the inside of the Door Visor Rear, peel off release paper of the double-side tapes about 3 to 10cm from their ends and have them folded to the outside.  
[Fig.11]



<p>⚠ Caution</p>	<ul style="list-style-type: none"> <li>- Be sure to peel off the release paper as in Fig.11 to prevent it from ripping during installation.</li> </ul>
----------------------	--

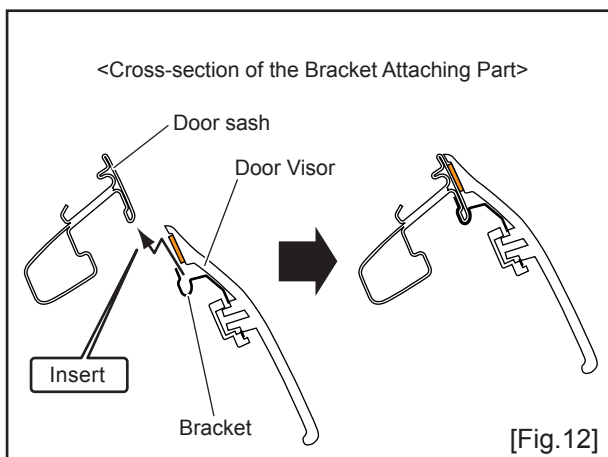

**Installation**

#### 5. Installing the Door Visor Rear

- (1) Set the front and rear ends of the Door Visor Rear evenly positioned, and then insert the tip of the bracket attached in Step 1-(2) into the sash of the rear door.  
[Fig.12] [Fig.13]

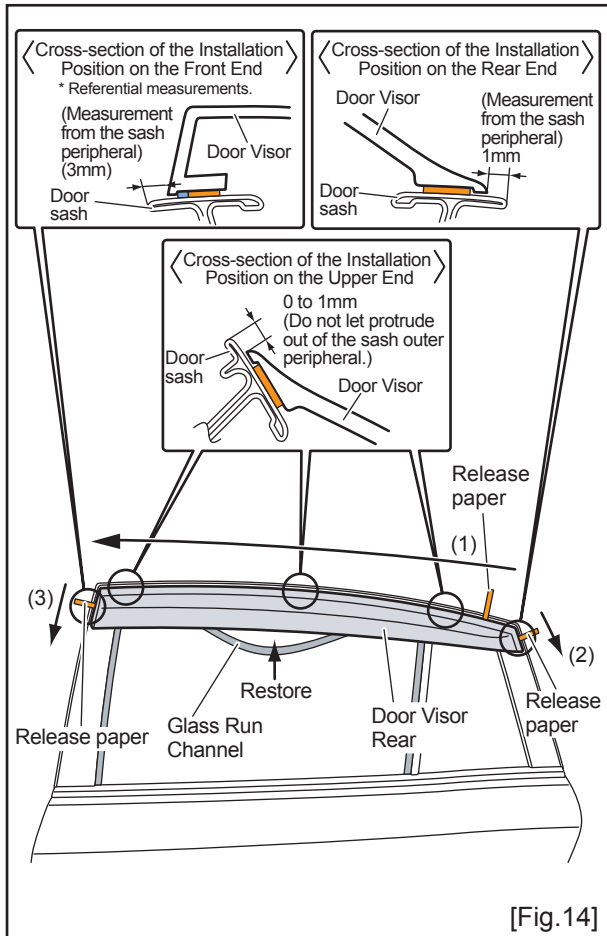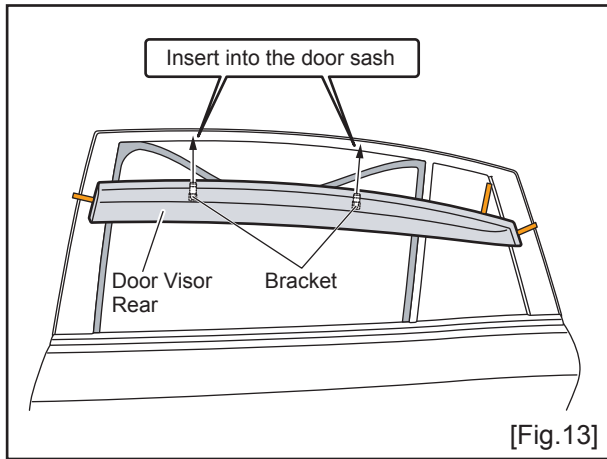

- (2) When performing Step 5-(1), adjust the position so that it does not protrude out of the outer peripheral of the rear door sash.  
[Fig.14]



- Attach the Door Visor taking care it does not protrude out of the outer peripheral of the sash. If it protrudes out, it may interfere with the vehicle parts or may cause injury.

- (3) While holding it in place, peel off and remove release paper in the order of (1) -> (2) -> (3) in the illustration. When doing so, be careful that the release paper does not get ripped in the middle.  
[Fig.14]
- (4) Press the entire surface of the double-sided tape onto the rear door sash to apply it firmly.  
[Fig.14]



- When applying the double-sided tape onto the pillar sash on the front side of the rear door, directly press on the back side of the sticking surface of the double-sided tape of the Door Visor.



- (5) Restore the Glass Run Channel.  
This completes the installation.  
[Fig.14]
- (6) Install on the RH side in the same way.
- (7) If the surface of the Door Visor is dirty after installation, clean it with a waste cloth.