Technical Specifications

HP P24v G5 FHD Monitor




Front

1. Power Button

Technical Specifications

HP P24v G5 FHD Monitor

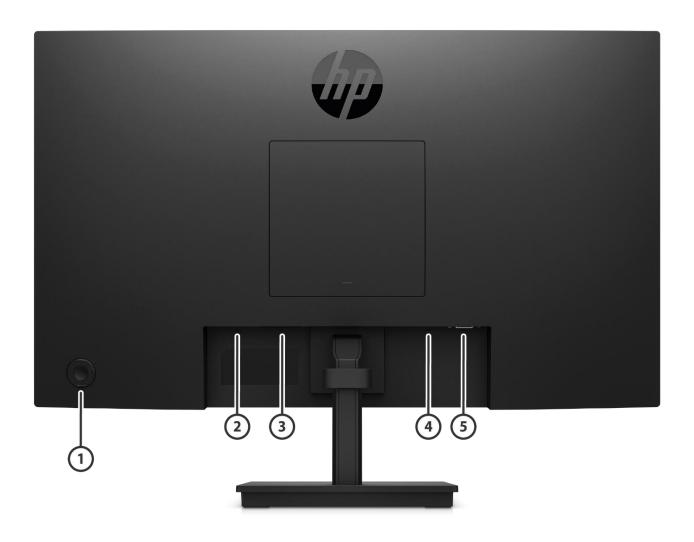

- 1. Joypad OSD button
- 2. Security Cable Slot
- 3. Power Connector

Back

- 4. HDMI 1.4 Port
- 5. VGA Port

Technical Specifications

Model: 64W18AA

Panel Specifications Display Size (Diagonal) 23.8 inch

Panel Technology VA **Max Refresh Rate** 75Hz

Native Resolution FHD (1920 x 1080) Panel Bit Depth 8 bit (6 bit + FRC)

Aspect Ratio 16:9 **Brightness (Typical)** 250 nits Contrast Ratio (Static) 3000:1 **Dynamic Contrast Ratio** 8M:1

Flicker Free Yes (TÜV certified) **Pixel Pitch** 0.27 mm x 0.27 mm

93 PPI Pixels Per Inch (PPI)

Display Colors Up to 16.7 million colors supported

30k

Backlight Lamp Life Minimum (To Half

Brightness - In Hours)

Haze

Backlight Type Edge-lit **Screen Treatment** Anti-glare Hardness 3H 25%

5ms GtG (with overdrive) Response Time (Typical)

Horizontal Viewing Angle (Typical

178° Cr>10)

Vertical Viewing Angle (Typical Cr>10) 178° Panel Active Area Metric (W X H) 52.59 x 29.58 cm

Panel Active Area Imperial (W X H) 20.70 x 11.65 in

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color NTSC 72%

Color Management Color Space/ Subsampling Support RGB 4:4:4 **RGB Channel Adjust** Yes, Gain

Default Color Temperature Standard (6500K)

Monitor Specifications Bezel Type 3-sided borderless

> **Color Of Stand** Black **Color Of Head** Black Tilt -5~+23°

Vesa Mounting 100 mm x 100 mm

Security Lock Standard Security Lock Slot

Detachable Stand

3/3/0 for LA, NA, EMEA, APJ Warranty (3/3/3 in select APJ Countries)

Low Blue Light Yes. (TÜV certified)

Management Software HP Display Center, HP Display Manager*

*Host PC requires Windows 10. HP Display Center is available on

the Microsoft store.

Technical Specifications

| On Screen | Display |
|-----------|---------|
| (OSD) | |

On Screen Display Brightness+, Color Control, Image Control, Input Control,

Power Control, Menu Control, Management, Information,

Exit

Native Resolution FHD (1920 x 1080)

NOTE: HDMI 1.4 & VGA required to drive panel at its native

resolution.

The video card of the connected PC must be capable of

supporting 1920x1080 at 60 Hz with 8-bit color using one HDMI

or VGA.

Maximum Resolution

Preset Graphic Modes/Supported

Resolutions

1920 x 1080 (FHD) 640 x 480 @ 60Hz

640 x 480 @ 75Hz (HDMI only)

720 x 400 @ 70 Hz 800 x 600 @ 60 Hz

800 x 600 @ 75 Hz (HDMI only)

1024 x 768 @ 60 Hz

1024 x 768 @ 75 Hz (HDMI only)

1280 x 720 @ 60 Hz 1280 x 800 @ 60 Hz 1280 x 1024 @ 60 Hz

1280 x 1024 @ 75 Hz (HDMI only)

1440 x 900 @ 60 Hz 1600 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz

1920 x 1080 @ 50 Hz (HDMI only)

1920 x 1080 @ 60 Hz

1920 x 1080 @ 75 Hz (HDMI only)

Minimum Vertical Scan Rate48 HzMaximum Vertical Scan Rate75 HzMinimum Horizontal Scan Rate55.6 kHzMaximum Horizontal Scan Rate90.8 kHzMaximum Pixel Clock94.0 MHzUser Programmable ModesYes, 10

User-Assignable Function Buttons Yes, 4 (VGA: 6 options, HDMI: 5 options)

11 (English, Spanish, German, French, Italian,

Languages Netherlands, Portuguese, Japanese, T-Chinese, S-Chinese

and Russian)

Connector Types

 HDMI
 1 HDMI 1.4

 HDCP
 Yes, HDMI

 VGA
 1 VGA

Special Features

SWITCH Monitor Power button

Next Active Input / Up button Brightness / Down button Information / Left button Color / Right button Menu / Enter button



Technical Specifications

User Presets 11 (VGA) / 17 (HDMI)

Power & Operating

Specs

Power Supply

Internal **Power Source** 100 - 240 VAC 50/60 Hz

Power Consumption- Max 30 W **Energy Saving/Stand By Mode** 0.5 W **Power Consumption - Typical** 20 W

Energy Star Data Operational Mode at 100 VAC

14.3 W Operational Mode at 115 VAC Operational Mode at 230 VAC 14.3 W

EU Energy Efficiency Class (ErP LOT-5)

On-mode Power Consumption for Standard Dynamic Range (SDR) ErP LOT5 Energy Efficiency Class for Standard Dynamic Range (SDR)

17W

14.3 W



Operating Conditions

Operating Temperature - Celsius 5° – 35°C **Operating Temperature - Fahrenheit** 41° - 95°F Non-Operating Temperature - Celsius -40° - 65°C Non-Operating Temperature --40° - 149°F

Fahrenheit

Operating Humidity 20 – 80% Relative Humidity (non-condensing)

Non-Operating Humidity 5 - 95%

Operating Altitude 0 – 5,000 m (16,400 ft.) Non-operating Altitude 0 - 12,192 m (40,000 ft.)

Certifications and Compliances

Mercury-free LED display backlighting

Low Halogen

Yes, Mercury-free LED backlighting

*External power supplies, WWAN modules, power cords,

cables and peripherals excluded.

Agency Approvals and Certifications

WW application CE.CB.KC/KCC/NOM/PSB/ICE/TUV-Bauart/ISO 9241-

307/TUV flicker free/ TUV LBL/ BIS/ UAE safety/ UAE

RoHS/ Ukraine safety/ South Africa safety/

EAC/CSA/PSB/ISC/CCC/CEL/CECP/SEPA/TCO/TCO Certified

Edge/Energy Star/ISC/VCCI/FCC/BSMI/Vietnam MEPS/Australian-New Zealand MEPS/WEEE/CEC

Microsoft WHQL Certification Win 11, Win 10, Win 8, Win 7

ENERGY STAR® Certified Yes, ENERY STAR® **EPEAT®** Registered

EPEAT® registered* Regions need to verify by country

> *Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit

http://www.epeat.net for more information.

CEL Grade 2 **China Energy Label** TCO Certified Edge Yes **TCO Certified** Yes

SmartWay Transport Partnership - NA

Yes (NA sku)



| Recyclable Packaging (Box, packing materials) |
|--|
| Unit Product/Package Product Dimensions (Unpacked with stand) (W x D x H) Product Dimensions (Packed) (W x D x H) Display Head Dimensions (Unpacked without stand) (W x D x H) Display Head Dimensions (Unpacked without stand) (W x D x H) Base Area Footprint (w x d mm) Top: 1.4 mm Top: 0.55 in Sides: 1.4 mm Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in Sides: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Sides: 0.55 in |
| Specifications Cunpacked with stand) (W x D x H) S3.89 x 18.05 x 39.78 cm 21.22 x 7.11 x 15.66 in |
| Product Dimensions |
| (Packed) (W x D x H) Display Head Dimensions (Unpacked without stand) (W x D x H) 53.89 x 5.143 x 32.36 cm 21.22 x 2.02 x 12.74 in Base Area Footprint (w x d mm) 173.97 x 169.97 mm 6.85 x 6.69 in Bezel Measurements (Unpacked with stand) (W x D x H) Top: 1.4 mm Top: 0.55 in Bottom: 20.2 mm Bottom: 7.95 in Product Weight (Unpacked with stand) Product Weight (Packed) 5.49 kg 12.1 lb (Packed) Product Weight (Head Only) 3.17 kg 6.99 lb Pallet Information Pallet Dimensions (L x W x H mm) Slip Sheet: Slip Sheet: (20 ft &40 ft) (20 ft &40 ft) (20 ft &40 ft) Slip Sheet: (20 x 1000 x 2358 mm (47.24 x 39.37 x 77.44 inch (40 HQ) (40 HQ) Pallet: Pallet: Pallet: Pallet: Pallet: Pallet: Pallet: Pallet: (40 HQ) |
| Cuppacked without stand) (W x D x H) |
| Note |
| Cumpacked with stand) (W x D x H) Sides: 1.4 mm Sides: 0.55 in |
| Product Weight (Unpacked with stand) |
| Product Weight (Unpacked with stand) 3.57 kg 7.86 lb Product Weight (Packed) 5.49 kg 12.1 lb Product Weight (Head Only) 3.17 kg 6.99 lb Pallet Information Pallet Dimensions (L x W x H mm) Slip Sheet: 1200 x 1000 x 1967 mm (20 ft &40 ft) 47.24 x 39.37 x 77.44 inch (20 ft &40 ft) Slip Sheet: 1200 x 1000 x 2358 mm (40 HQ) 47.24 x 39.37 x 92.83 inch (40 HQ) 47.24 x 39.37 x 82.68 inch Pallet: 1200 x 1000 x 2100 mm 47.24 x 39.37 x 82.68 inch |
| Compacked with stand Product Weight (Packed) Product Weight (Packed) Product Weight (Head Only) Pallet Information Pallet Dimensions (L x W x H mm) Compact Weight (Head Only) Compact Weight (Head Only) Slip Sheet: 1200 x 1000 x 1967 mm (Head Only) 1200 x 1000 x 1967 mm (Head Only) Compact Weight |
| Product Weight (Packed) 5.49 kg 12.1 lb Product Weight (Head Only) 3.17 kg 6.99 lb Pallet Information Pallet Dimensions (L x W x H mm) Slip Sheet: 1200 x 1000 x 1967 mm (20 ft &40 ft) 47.24 x 39.37 x 77.44 inch (20 ft &40 ft) Slip Sheet: 1200 x 1000 x 2358 mm (40 HQ) 47.24 x 39.37 x 92.83 inch (40 HQ) 47.24 x 39.37 x 82.68 inch Pallet: 1200x1000 x 2100 mm 47.24 x 39.37 x 82.68 inch |
| (Packed) Product Weight (Head Only) 3.17 kg 6.99 lb Pallet Information Pallet Dimensions (L x W x H mm) Slip Sheet: 1200 x 1000 x 1967 mm (47.24 x 39.37 x 77.44 inch (20 ft &40 ft)) Slip Sheet: 1200 x 1000 x 2358 mm (40 HQ) 47.24 x 39.37 x 92.83 inch (40 HQ) Pallet: Pallet: 1200x1000 x 2100 mm Pallet: Pallet: 1200x1000 x 2100 mm |
| Product Weight (Head Only) 3.17 kg 6.99 lb Pallet Information Pallet Dimensions (L x W x H mm) Slip Sheet: 1200 x 1000 x 1967 mm (47.24 x 39.37 x77.44 inch (20 ft &40 ft)) 47.24 x 39.37 x77.44 inch (20 ft &40 ft) Slip Sheet: 1200 x 1000 x 2358 mm (40 HQ) 47.24 x 39.37 x 92.83 inch (40 HQ) 49 HQ) Pallet: 1200 x 1000 x 2100 mm Pallet: 1200 x 1000 x 2100 mm 47.24 x 39.37 x 82.68 inch |
| Pallet Information Pallet Dimensions (L x W x H mm) Slip Sheet: Slip Sheet: 47.24 x 39.37 x 77.44 inch (20 ft &40 ft) (20 ft &40 ft) Slip Sheet: Slip Sheet: 1200 x 1000 x 2358 mm 47.24 x 39.37 x 92.83 inch (40 HQ) (40 HQ) Pallet: Pallet: 1200x1000 x 2100 mm 47.24 x 39.37 x 82.68 inch |
| (L x W x H mm) 1200 x 1000 x 1967 mm (20 ft &40 ft) Slip Sheet: 1200 x 1000 x 2358 mm (40 HQ) Pallet: 1200 x 1000 x 2100 mm 47.24 x 39.37 x 77.44 inch (20 ft &40 ft) Slip Sheet: 1200 x 1000 x 2358 mm 47.24 x 39.37 x 92.83 inch (40 HQ) Pallet: 1200x1000 x 2100 mm 47.24 x 39.37 x 82.68 inch |
| (20 ft &40 ft) (20 ft &40 ft) Slip Sheet: Slip Sheet: 1200 x 1000 x 2358 mm 47.24 x 39.37 x 92.83 inch (40 HQ) (40 HQ) Pallet: Pallet: 1200x1000 x 2100 mm 47.24 x39.37 x 82.68 inch |
| 1200 x 1000 x 2358 mm 47.24 x 39.37 x 92.83 inch (40 HQ) (40 HQ) Pallet: Pallet: 1200x1000 x 2100 mm 47.24 x 39.37 x 82.68 inch |
| (40 HQ) (40 HQ) Pallet: Pallet: 1200x1000 x 2100 mm 47.24 x39.37 x 82.68 inch |
| Pallet: Pallet: 1200x1000 x 2100 mm 47.24 x39.37 x 82.68 inch |
| 1200x1000 x 2100 mm 47.24 x39.37 x 82.68 inch |
| |
| (20 ft & 40 ft) (20 ft & 40 ft) |
| |
| Pallet: Pallet: |
| 1200 x 1000 x 2494 mm 47.24 x 39.37 x 98.19 inch |
| (40 HQ) (40 HQ) |
| Pallet Total Weight Slip Sheet: Slip Sheet: |
| 439.2 kg (20 ft & 40 ft) 968.27 lb (20 ft & 40 ft) |
| Slip Sheet: Slip Sheet: |
| 527.04 kg (40 HQ) 1161.92 lb (40 HQ) |
| Pallet: Pallet: Pallet: |
| 459.2kg (20 ft & 40 ft) 1012.36 lb (20 ft & 40 ft) Pallet: Pallet: |
| Pallet: Pallet: Pallet: 547.04 kg (40 HQ) 1206.02 lb (40 HQ) |
| ארט.טב על (40 חע) ארט.זייט אפן ארט אין ארט ארע אין ארט |

Technical Specifications

Pallet Layers

Pallet Product per Layer

Total Products per Pallet

Container Load, 20-Foot Container Load, 40-Foot

Container Load, 40-Foot HighQ

5 or 6 (slip sheet & pallet) 16 (slip sheet & pallet)

80 or 96 per pallet (slip sheet & pallet)

800 (slip sheet and pallet)

1680 sets (slip sheet and pallet) 2016 sets (slip sheet & pallet)

What's in the box?

AC power cord (1.83m) 6ft HDMI 1.4 cable (1.8m) 5.9ft

Warranty Doc kit

Quick Setup Poster

User Guide and Warranty Languages **User Guide Languages**

Warranty Languages

Arabic, Bahasa Indonesia, Bulgarian, Chinese-S, Chinese-T, Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Kazakh, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese (Brazilian), Portuguese (Iberian), Romanian, Russian, Serbian, Slovak, Slovenian,

Spanish, Swedish, Thai, Turkey, Ukrainian

English US (EN), English AP (EN-AP), English LA (EN-LA), English UK (EN-GB), Arabic (AR) -17x, Bahasa Indonesia (ID), Bosnian (BS), Bulgarian (BG), Chinese-S (CN), Chinese-T (TW), Croatian (HR), Czech (CS), Danish (DA), Dutch (NL), Estonian (ET), Finnish (FI), French Canadian (FC), French European (FR), German (DE), Greek (EL), Hebrew (HE), Hungarian (HU), Italian (IT), Japanese (JA), Kazakh (KK), Korean (KO), Latvian (LV), Lithuanian (LT), Norwegian (NO), Polish (PL), Portuguese, Brazilian (BR), Portuguese, Iberian (PT), Romanian (RO), Russian (RU), Serbian (SR), Slovak (SK), Slovenian (SL), Spanish, Castilian (ES-ES), Spanish, Latin America (ES-MX), Swedish (SV), Thai (TH), Turkish (TR), Ukrainian (UK),

Vietnamese (VI)



Technical Specifications

FNVIRONMENTAL DATA

| ENVIRONMENTAL DATA | | | | |
|-------------------------------|--|---|---|--|
| Eco-Label Certifications & | This product has received or is i | n the process of being certified | to the following approvals | |
| declarations | and may be labeled with one or more of these marks: | | | |
| | IT ECO declaration | | | |
| | US ENERGY STAR® | | | |
| | US Federal Energy Mar | nagement Program (FEMP) | | |
| | | l in the United States. See http:/ | //www.eneat.net for | |
| | registration status in y | | , | |
| | TCO Certified | | | |
| | China Energy Conserva | ation Program (CECP) | | |
| | 1 | ntal Protection Administration (| (CEDA) | |
| | T : 6 M ! | illat Frotection Administration | (JEFA) | |
| | | | | |
| | Korea Eco-label | | | |
| | Japan PC Green label* | | | |
| Sustainable Impact | • 85% ITE – derived closed loop | nlastic | | |
| Specifications | • Low halogen | plastic | | |
| Specifications | _ | ushions are 100% sustainably s | ourcod and rocyclablo | |
| | Outside Box and corrugated cushions are 100% sustainably sourced and recyclable Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable | | | |
| | | | | |
| System Configuration | The configuration used for the l | | | |
| | the Notebook model is based or | n a "Typically Configured Noteb | 00K". | |
| Energy Consumption | | | | |
| (in accordance with US ENERGY | | | | |
| STAR® test method) | 11EVAC 60U- | 220VAC FOUL | 100VAC FOU- | |
| Normal Operation (Short idle) | 115VAC, 60Hz 11.86 W | 230VAC, 50Hz 11.69 W | 100VAC, 50Hz 11.92 W | |
| Normal Operation (Long idle) | | | | |
| | 11.86 W | 11.69 W | 11.92 W | |
| Sleep Off | 0.21 W 0.07 W | 0.26 W 0.13 W | 0.2 W 0.07 W | |
| Off | 0.07 W | 0.13 W | 0.07 W | |
| | NOTE: Energy efficiency data listed is a model family. HP computers may applicable U.S. Environmental F computers. If a model family do energy efficiency data listed is a high efficiency power supply, and | arked with the ENERGY STAR® Lo Protection Agency (EPA) ENERGY Des not offer ENERGY STAR® con for a typically configured PC fea | ogo are compliant with the / STAR® specifications for npliant configurations, then turing a hard disk drive, a | |
| Heat Dissipation* | 115VAC, 60Hz | 230VAC, 50Hz | 100VAC, 50Hz | |
| Normal Operation (Short idle) | 40.6 BTU/hr | 40 BTU/hr | 40.8 BTU/hr | |
| Normal Operation (Long idle) | 40.6 BTU/hr | 40 BTU/hr | 40.8 BTU/hr | |
| Sleep | 0.7 BTU/hr | 0.9 BTU/hr 0.7 BTU/hr | | |
| Off | 0.2 BTU/hr | 0.4 BTU/hr | 0.2 BTU/hr | |
| | * NOTE: Heat dissipation is calculevel is attained for one hour. | ılated based on the measured w | atts, assuming the service | |

| Longevity and Upgrading | | can be upgraded, possibly extending its useful life | by several years. | | |
|--|--|---|--------------------------------|--|--|
| | Upgradeable | e features and/or components contained in the | | | |
| | | Spare parts are available throughout the warranty period and or for up to "5" years after the end of production. | | | |
| Additional Information | | s product is in compliance with the Restrictions of Fective - 2011/65/EC. | lazardous Substances (RoHS) | | |
| | | This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. | | | |
| | • This | s product is in compliance with California Proposition | on 65 (State of California; | | |
| | Saf | e Drinking Water and Toxic Enforcement Act of 198 | 6). | | |
| | • This | s product is in compliance with the IEEE 1680 (EPEA | T) standard at the Gold level, | | |
| | | www.epeat.net | | | |
| | | stics parts weighing over 25 grams used in the proc | luct are marked per | | |
| | | 11469 and ISO1043. | 1.6 . 1.616 | | |
| | This product is 98.9% recycle-able when properly disposed of at end of life. | | | | |
| Packaging Materials | External: | PAPER/Paperboard | 547 g | | |
| | | PAPER/Molded Pulp | 987 g | | |
| | Internal: | PLASTIC/Polyethylene high density - HDPE | 40 g | | |
| | The plastic | packaging material contains at least 0.0% recycled | content. | | |
| | The corruga | The corrugated paper packaging materials contains at least 90% recycled content. | | | |
| RoHS Compliance | extend the r (RoHS) Direc | HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam. | | | |
| | industry-wid additional su | We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products. | | | |
| | requirement | voluntary objective to achieve worldwide complian is for virtually all relevant products by July 2013, an the commitment to include further restricted subs evolve. | nd we will continue to extend | | |
| To obtain a copy of the HP RoHS Compliance Sta | | | P RoHS position statement. | | |
| Material Usage | (refer to the | does not contain any of the following substances i HP General Specification for the Environment at | | | |
| | http://www. html): | http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html): | | | |
| | | estos | | | |
| | • cer | tain Azo Colorants | | | |



| | Certain Brominated Flame Retardants – may not be used as flame retardants in | |
|----------------------------|--|--|
| | plastics | |
| | • Cadmium | |
| | Chlorinated Hydrocarbons | |
| | Chlorinated Paraffins | |
| | Bis(2-Ethylhexyl) phthalate (DEHP) | |
| | Benzyl butyl phthalate (BBP) | |
| | Dibutyl phthalate (DBP) | |
| | Diisobutyl phthalate (DIBP) | |
| | | |
| | | |
| | Halogenated Diphenyl Methanes | |
| | Lead carbonates and sulfates | |
| | Lead and Lead compounds | |
| | Mercuric Oxide Batteries | |
| | Nickel – finishes must not be used on the external surface designed to be | |
| | frequently handled or carried by the user. | |
| | Ozone Depleting Substances | |
| | Polybrominated Biphenyls (PBBs) | |
| | Polybrominated Biphenyl Ethers (PBBEs) | |
| | Polybrominated Biphenyl Oxides (PBBOs) | |
| | Polychlorinated Biphenyl (PCB) | |
| | Polychlorinated Terphenyls (PCT) | |
| | Polyvinyl Chloride (PVC) — except for wires and cables, and certain retail packaging | |
| | has been voluntarily removed from most applications. | |
| | Radioactive Substances | |
| | | |
| | Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO) | |
| Packaging Usage | HP follows these guidelines to decrease the environmental impact of product packaging: | |
| | Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium | |
| | in packaging materials. | |
| | , , , | |
| | Eliminate the use of ozone-depleting substances (ODS) in packaging materials. Position positioning materials for some of disposantily. | |
| | Design packaging materials for ease of disassembly. | |
| | Maximize the use of post-consumer recycled content materials in packaging | |
| | materials. | |
| | Use readily recyclable packaging materials such as paper and corrugated materials. | |
| | Reduce size and weight of packages to improve transportation fuel efficiency. | |
| | Plastic packaging materials are marked according to ISO 11469 and DIN 6120 | |
| | standards. | |
| P. J £ 125 - 84 | UD effects and of life UD and other and an illustrations and an illustrations and an illustrations are in the interest and an illustrations and an illustrations are in the interest and an illustration are in the interest and an illustration are in the interest and are in th | |
| End-of-life Management and | HP offers end-of-life HP product return and recycling programs in many geographic areas. | |
| Recycling | To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your | |
| | nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of | |
| | in a responsible manner. | |
| | The FILINGER directive (2002/05/FC) we entire a record at the state of | |
| | The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment | |
| | information for each product type for use by treatment facilities. This information (product | |
| | disassembly instructions) is posted on the Hewlett Packard web site at: | |
| | | |

| | http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment. | | |
|--|--|--|--|
| HP, Inc. Corporate Environmental Information | For more information about HP's commitment to the environment: | | |
| | Global Citizenship Report http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications http://www8.hp.com/us/en/hp-information/environment/ecolabels.html ISO 14001 certificates: http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842 and http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf | | |
| footnotes | Percentage of ocean-bound plastic contained in each component varies by product Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard. External power supplies, WWAN modules, power cords, cables and peripherals excluded. 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers. Fiber cushions made from 100% recycled wood fiber and organic materials. Plastic cushions are made from >90% recycled plastic. | | |



Technical Specifications

© Copyright 2023 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

| Change Log | | | | |
|---------------|----------|---------|---|--|
| | | | | |
| July 22, 2022 | V1 to V2 | Updated | Pallet Information | |
| July 28, 2022 | V2 to V3 | Updated | Pallet Information and Contains Recycled Plastics | |
| March 6, 2023 | V3 to V4 | Added | Mercury-free LED display backlighting | |
| | V4 to V5 | | | |
| | | | | |
| | | | | |

