



The new degree of comfort.®

# TRITON® LIGHT DUTY – The Most Intelligent, High-Efficiency Commercial Gas Water Heater in the Market

*Ideal for Replacement and New Construction Applications*

## THE TRITON ADVANTAGE

- Most accurate, all-inclusive leak detection and prevention system in the market
- Eliminate downtime with the ability to detect and prevent water heater problems
- Helical Coil with Internal Diverter heat exchanger constructed of porcelain coated steel
- Universal retrofit features make it easy to replace any water heater

## SS EXCLUSIVE FEATURES

- **LeakGuard™** – All inclusive leak detection and prevention system with auto shut off valve limits water leakage outside the tank
- **Integrated BMS Connectivity Via BACnet (MS/TP)** – Built-in BACnet port easily connects to building management systems (BMS)
- **Energy & Water Usage Reports** – Track usage trends and manage energy and water consumption through the Rheem EcoNet app
- **Warranty** – 5-Year limited tank\*

## SS AND SU FEATURES

### Built-In Intelligence

- **LeakSense™** – Intelligent leak detection system detect leaks as small as a grain of sand and provides real-time notifications that warn you before it becomes an emergency
- **EcoNet® Smart Monitoring Technology with Integrated WiFi\*\*** – Rheem Exclusive! Provides performance updates and alerts via both mobile device and full-color LCD display
- **Systematic Health Checks** – Ongoing self-monitoring of Triton's most vital components and alerts of potential issues
- **Preventive Maintenance Alerts** – Maintenance reminders help to extend life of the tank

### Easy Retrofit/Installation

- **Multiple Connection Points** – Multiple water connections at the top, and front of the unit simplify installation for replacement of any model
- **Variety of Flexible Venting Options Including InnoFlue® Flex Venting** – Polypropylene, PVC, CPVC, InnoFlue® Flex Vent and ABS materials; venting 2, 3 and 4 inch diameters
- **Built-In Condensate Neutralizer** – Reduces water acidity for safe drainage

### Built to Last

- **Helical Heat Exchanger** – Steel construction with a minimum of weld joints and porcelain coated to minimize rust and corrosion for extended tank life and maximum thermal efficiency
- **Advanced Power Anodes** – Self-adjusting, non-sacrificial power anodes provide systematic monitoring of anode health and remaining tank life

### Energy Efficient

- **Scheduling Capability** – Adjust to heat water only during peak operating hours when your business needs it most

### UL Sanitation Compliance

- All models are UL Sanitation (NSF5) compliant when equipped with the optional ring seal kits

### Plus

- Altitude certified up to 10,100 feet above sea level
- ½-Inch gas connection
- CSA/ASME rated T&P valve
- Meets 14 ng/J NOx requirements
- SCAQMD Rule 1146.2 compliant
- Meets Massachusetts specifications
- Maximum temperature setting 185°F
- **Warranty** – SU Model: 3-Year limited tank; SS Model: 5-Year limited tank\*

\*See Commercial Warranty Certificate for complete information.

\*\*2.4 GHz WiFi broadband Internet connection required.



50-Gallon

75-Gallon

## Rheem Triton Light Duty

50 and 75-Gallon Capacities  
76,000-100,000 BTU/h  
Sealed Combustion System  
Up to 97% Thermal Efficiency  
Ultra Low NOx  
Porcelain Coated Tank Lining  
and Heat Exchanger  
Natural and LP Gas



With  
Optional Kit



Low Lead  
Compliant



BASE MODELS: SU = SMART UNIVERSAL	
50-GALLON	75-GALLON
GHE50SU-76	GHE75SU-100
GHE50SU-100	

PREMIUM MODELS: SS = SMART AUTO SHUTOFF VALVE	
50-GALLON	75-GALLON
GHE50SS-76	GHE75SS-100
GHE50SS-100	

**Electrical Requirements:** 110 Volt, 50 / 60 Hertz, 7.5 Max Breaker Amp Draw

RECOVERY CAPACITIES (Recovery in U.S. Gallons/Hr. (GPH) and Liters/Hr. (LPH) at various temperature rises)														
MODEL NUMBER	INPUT (BTU/H) NAT. & LP	THERMAL EFFICIENCY	UNITS	40°F (22°C)	50°F (28°C)	60°F (33°C)	70°F (39°C)	80°F (45°C)	90°F / (50°C)	100°F / (56°C)	110°F / (61°C)	120°F / (67°C)	130°F / (75°C)	140°F / (78°C)
GHE50SU/SS-76	76,000	97%	GPH	223	179	149	128	112	99	89	81	74	69	64
			LPH	846	677	564	483	423	376	338	308	282	260	242
GHE50SU/SS-100	100,000	97%	GPH	294	235	196	168	147	131	118	107	98	90	84
			LPH	1113	890	742	636	556	495	445	405	371	342	318
GHE75SU/SS-100	100,000	96%	GPH	291	233	194	166	145	129	116	106	97	90	83
			LPH	1101	881	734	629	551	489	440	400	367	339	315

MAXIMUM DELIVERY (In U.S. Gallons and Liters – Includes useable storage and recover for indicated times)																
MODEL NUMBER	INPUT (BTU/H) NAT. & LP	GAL.	LITERS	TEMP. RISE	UNITS	5 MIN.	10 MIN.	15 MIN.	20 MIN.	25 MIN.	30 MIN.	45 MIN.	60 MIN.	120 MIN.	180 MIN.	MIN TO RECOVER CONTENTS
GHE50SU/SS-76	76,000	50	189	100°F	GPH	42	50	57	65	72	80	102	124	214	303	34
				56°C	LPH	161	189	217	245	273	302	386	471	809	1147	
GHE50SU/SS-100	100,000	50	189	100°F	GPH	45	55	64	74	84	94	123	153	270	388	26
				56°C	LPH	170	207	244	281	318	355	466	578	1023	1468	
GHE75SU/SS-100	100,000	75	284	100°F	GPH	62	72	82	91	101	111	140	169	285	402	38
				56°C	LPH	236	272	309	346	382	419	529	639	1080	1520	

## VENTING OPTIONS ALL MODELS

POWER VENT CONFIGURATION; (RIGID PIPE)				POWER DIRECT VENT CONFIGURATION; (RIGID PIPE)				TERMINATIONS
ELEVATION (FEET)	VENT SIZE (INCHES)	NAT MAX. EQ. LENGTH (FEET)	LP MAX. EQ. LENGTH (FEET)	NAT MAX. EQ. LENGTH (FEET)		LP MAX. EQ. LENGTH (FEET)		
				INTAKE	EXHAUST	INTAKE	EXHAUST	
0-10,100	2"	40'	40'	40'	40'	40'	40'	2" & 3" 90° ELBOWS, 2", 3" & 4" CONCENTRIC AND 2" & 3" PANCAKE
	3"	140'	140'	140'	140'	140'	140'	
	4"	140'	140'	140'	140'	140'	140'	
MINIMUM INTAKE AIR EXHAUST VENT: 10' EQUIVALENT LENGTH								

For each long radius sweep 90° elbow, reduce pipe length by five (5) feet.

For each standard sweep 90° elbow, reduce pipe by eight (8) feet.

For each 45° elbow, reduce pipe length by two and a half (2.5) feet.

**Note: Vent pipe size should not be mixed for venting these units.**

**Use same diameter pipe for all venting of the unit.**

See below for termination options

2" Concentric and 2" Flat termination for 2" vents

3" Concentric and 3" Flat termination for 3" and 4" vents

4" Concentric for 4" vents

See use and care manual for venting details.

**Venting configurations are the same for SS Models. Vents with Polypropylene, ABS, CPVC or PVC.**

**NOTE: For Canadian installations, please use Polypropylene, ULC S636 PVC or CPVC.**

MODEL NUMBER	FLEX VENT LENGTHS POWER VENT ONLY	
	PIPE DIAMETER 2"	PIPE DIAMETER 3"
GHE50SU/SS-76	SP21091 (30 feet)	AP19356 (25 feet)
GHE50SU/SS-100	SP21091 (30 feet)	AP19356 (25 feet)
GHE75SU/SS-100	SP21091 (30 feet)	AP19356 (25 feet)

NOTE: Equivalent 60 Ft. with rigid & flexible pipe.

**Efficiency** | All models tested according to ANSI test procedures, and meet or exceed the thermal efficiency and standby loss requirements of ASHRAE standard (EPact). Also exceeds energy efficiency codes of all states including California Energy Commission (CEC).

**Safety and Construction** | Design certified by CSA: For operation at 185 degrees; meets all safety and construction requirement of ANSI Z21.10.3; as an automatic storage; as an automatic circulating tank water heater; and for operation on combustible floors and in alcove installations. **Certified for 150 PSI maximum working pressure.**



The new degree of comfort.




Commercial Gas  
Triton Water Heaters

### DIMENSIONAL INFORMATIONS (Shown in English and Metric)

MODEL NUMBER	UNITS	TANK HEIGHT	HT. TO SIDE T&P	DIAM.	HT. TO DRAIN VALVE	LOWER THERMISTOR	PAN TO PAN	EXHAUST CONN.	HT. TO VENT	HT. TO GAS CONN.	SIDE OUTLET	SIDE INLET	SIDE ANODE	SIDE ANODE	SIDE ANODE	WATER HEATER WEIGHT (LBS.)	APPROX. SHIPPING WEIGHT (LBS.)
		A	B	C	D	E	F	G	H	I	J	K	L	M	N		
GHE50SU/SS-76	Inches	64-1/2	48	21-3/4	3	15-1/4	55-1/8	9	62-3/4	60-3/16	48	12	5-3/4	39-1/2	27-3/4	212	256
	MM	1638	1219	533	76	387	1400	229	1594	1534	1981	305	146	1003	705		
GHE50SU/SS-100	Inches	64-1/2	48	21-3/4	3	15-1/4	55-1/8	9	62-3/4	60-3/16	48	12	5-3/4	39-1/2	27-3/4	212	256
	MM	1638	1219	533	76	387	1400	229	1594	1534	1981	305	146	1003	705		
GHE75SU/SS-100	Inches	62-1/4	46-3/4	26-1/4	3-1/4	15-7/8	55-1/8	9	62-5/8	60-1/8	46-3/4	12	5-3/4	40-3/4	34-1/4	283	332
	MM	1638	1187	667	83	403	1400	229	1591	3175	1187	305	146	1035	870		

0" CLEARANCE TO ALL COMBUSTIBLE SURFACES ON SIDES AND BACK; 15" FOR TOP.  
(FOR CANADIAN INSTALLATIONS, PLEASE USE POLYPROPYLENE, ULC S636 PVC OR CPVC.)

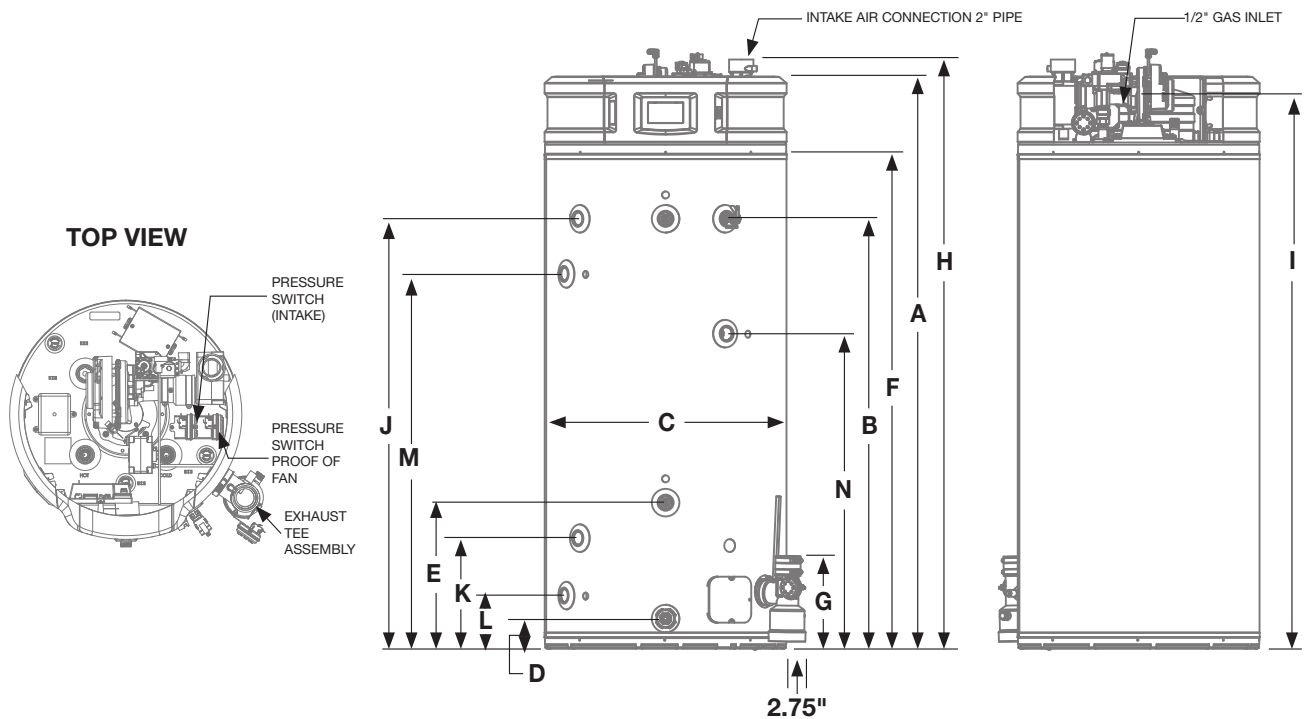

### Recommended Specifications (for trade reference only)

Water heater(s) shall be Triton LD Model \_\_\_\_\_ # or equal, manufactured by Rheem, having a gas input of \_\_\_\_\_ BTU/h and recovery rate of \_\_\_\_\_ GPH at a 100°F temperature rise and tested and certified at a Min. of 96% thermal efficiency, with a maximum hydrostatic working pressure of 150 psi and minimum Inlet Gas Pressure 3.5" in WC. Water heater(s) shall 1.) Include factory installed noise reducer to allow operation less than 68dB in accordance with ANSI/ASAS 12.51-2012/ISO 3741:2010. 2.) Have power anodes that are non-sacrificial and maintenance free. 3.) Have a factory installed CSA/ASME rated temperature and pressure relief valve, meet SCAQMD rule 1146.2 and include the CSA seal of certification. 4.) Include a helical coil heat exchange system with both sides coated in high temperature porcelain enamel. 5.) Have 3/4" NPT front and top water connections. 6.) Have a 3 year (SU) or 5-year (SS) standard warranty.

The control shall be an integrated 4.3" Color touch screen with the ability to 1.) Provide user advanced notice of any issues with health alerts on tank and combustion system. 2.) Give users advanced notice of catastrophic failure with Integrated Leak sense™ leak detection. 3.) Automatically turn off water in the event of a failure with Integrated Leak Guard™ Auto Shut-Off Valve (SS model only). 4.) Report water & energy usage reports via app or control. (SS model only) 5.) Connect to a cloud, and control & remote monitor the system via the EcoNet® app through integrated WiFi. 6.) Connect to a Building Management System without the need of any accessories using an integrated BacNet MS/TP connection. (SS model only).

For Power Vent, water heater shall be suited for 2", 3", or 4" \_\_\_\_\_ pipe with a total maximum venting of 140 ft. For Power Direct Vent, water heater shall be suited for 2", 3", or 4" \_\_\_\_\_ pipe with a total maximum vent length, intake 140 ft, exhaust 140 ft. Water heater(s) shall be able to vent with the following materials: Polypropylene, PVC, CPVC, ABS, & InnoFlue® flex venting.

*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100  
Roswell, Georgia 30076 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED AIR & WATER