

BF6 Configuration

Important Information

Contents

- 1 x BF2 Sump Flooring
- 1 x BF4 Sump Flooring
- 1 x BFS2 Joining Strip
- 1 x BFC Connector

Tools Required

- Drill
- 27mm hole saw
- Measuring tape (or ruler)

Drill Measurements

- 410mm from the inside edge
- 42mm up from the base

Please Note: Please ensure you follow the above drill measurements. If the recommended measurements are not followed, the grid(s) will not fit the base unit due to the grid towers.



Step 1

Lay out the two bases (ensure all grids have been removed)



Step 2

Use the measuring tape (or ruler) to mark the measurement for drilling



Step 3

Measure on the inside, from the left-hand side, 620mm from the inside edge, and 42mm up from the base. Once marked, begin drilling

BF6 Configuration



Step 4

Once drilled, proceed to drill the same holes using the 27mm hole saw



Step 5

Repeat step 4 on the second base unit that will be connected



Step 6

Unscrew the nut from the BFC connector (left-handed thread)



Step 7

Remove the nut and the rubber washer from the connector



Step 8

Ensure the two holes and base units are lined up. Insert the connector through the two base units



Step 9

Screw on the rubber washer and nut

BF6 Configuration



Step 10a (Side 1)

Tighten the nuts until the bund walls are firmly together



Step 10b (Side 2)

The nut and rubber washer will create a seal. DO NOT OVERTIGHTEN




Step 11

Use the BFS2 Joining Strip. Push the strip down to hold the abutting bund walls together



Step 12

Insert all 3 grids

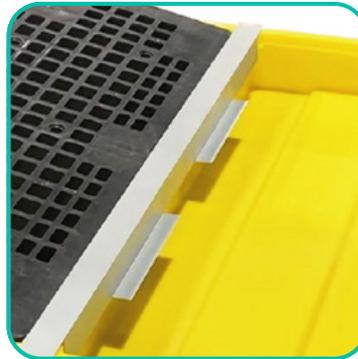

Step 13

The 2 sumps are now connected