


# MOTOBATT

QuadFlex™ Battery  
 WWW.MOTOBATT.COM  
 MB7U



## Physical Dimensions: (in./mm)

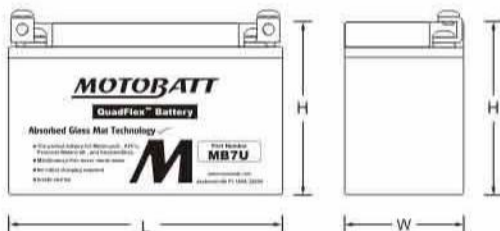

L: 5.90(150)    W: 2.56(65)    H: 3.70(94)

Tolerances are +0.04in.(+/-1mm) and +/-0.08in.(+/-2mm) for height dimensions.

## Features

- 12V VRLA Hi Capacity Starting Battery
- Absorbed Glass Mat (AGM) technology
- Brass Terminals - superior conductivity
- US IATA certified non-spillable
- Highest AH Capacity in the Industry
- Factory Activated-Ready to Install

## Performance Specifications

**Nominal Voltage** ----- 12 volts (6 cells)

### Nominal Capacity

|                                     |                |
|-------------------------------------|----------------|
| 20-hr. (0.325A to 10.50 volts)----- | 6.7 AH         |
| 10-hr. (0.65A to 10.50 volts)-----  | 6.5 AH         |
| 5-hr. (1.3A to 10.20 volts)-----    | 5.5 AH         |
| 1C. (6.5A to 9.6 volts)-----        | 41Min (4.44AH) |
| 8C. (52A to 6.00 volts)-----        | 3Min (2.6AH)   |

**Approximate Weight** ----- 4.96 lbs. (2.25kg)

**Energy Density (20-hr. rate)** ----- 1.44W-h/in<sup>3</sup> (87.7 W-h/l)

**Specific Energy (20-hr. rate)** ----- 16.2W-h/lb (35.7 W-h/kg)

**Internal Resistance (approx)** ----- 20 milliohms

**CCA (-0.4°F/-18°C, 7.2V,30S)**----- 100 amperes

**CA (68°F/20°C, 7.2V,30S)**----- 180 amperes

**Shelf Life (% of nominal capacity at 68°F (20°C))**----- SOC%    OCV

|                |     |        |
|----------------|-----|--------|
| 1 Months ----- | 97% | 12.78V |
| 3 Months ----- | 91% | 12.7V  |
| 6 Months ----- | 83% | 12.5V  |

### Operating Temperature Range

Charge ----- -4°F(-20°C) to 122°F(50°C)

Discharge ----- -40°F(-40°C) to 140°F(60°C)

**Case** ----- ABS

**Carton Contents** ----- 1-MotoBatt MB7U Battery,  
 2 screws, Install / user manual.




RETAIL CARTON




SCREW


## Shelf life & Storage

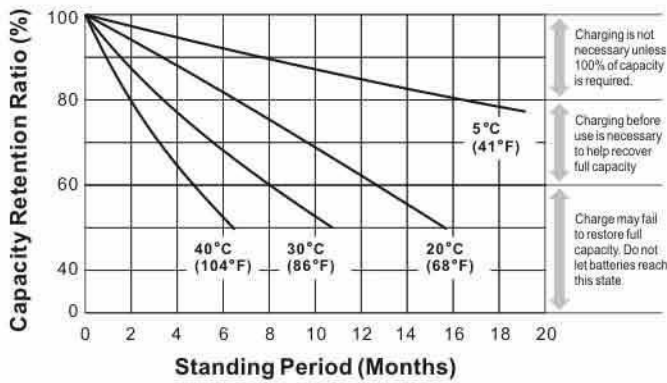


## Discharge Characteristics

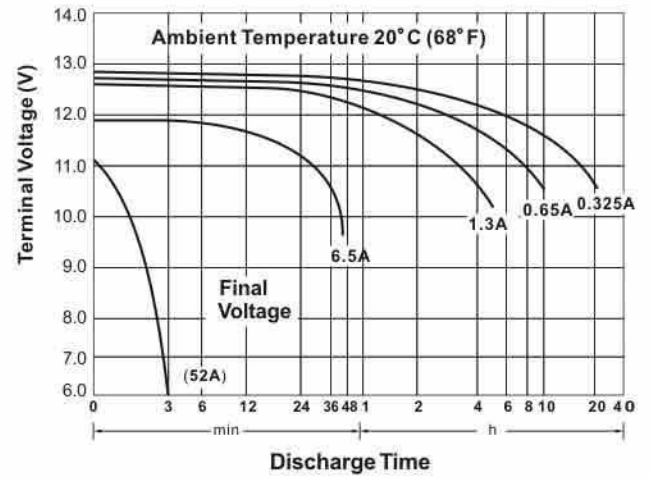

## Discharge Time vs. Discharge Current

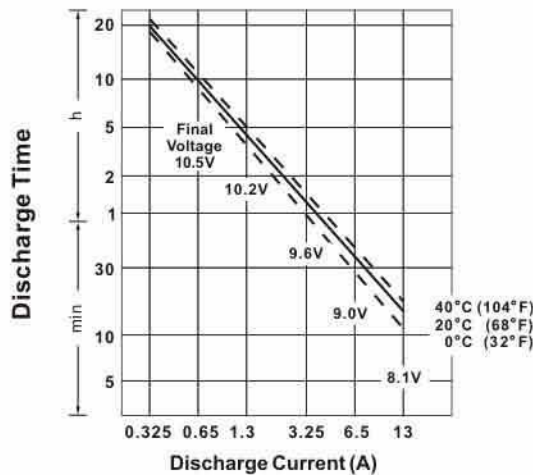

## Life Characteristics in Cyclic Use

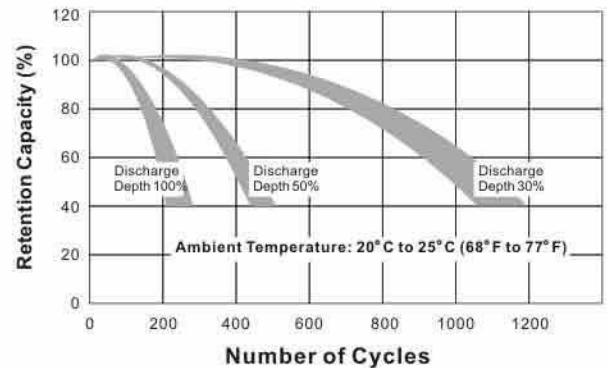

## Charging

**Cycle Applications:** limit initial current to 1.95A. Charge until battery voltage (under charge) reaches 14.8 to 15.0 volts at 68°F(20°C). Hold at 14.8 to 15.0 volts until current drops to under 130mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

## Can be used to replace

|        |       |  |  |
|--------|-------|--|--|
| YT7BBS | YT7B4 |  |  |
|        |       |  |  |
|        |       |  |  |
|        |       |  |  |
|        |       |  |  |
|        |       |  |  |

## Chargers

MotoBatt offers a wide range of chargers suitable for batteries up to 2A. Please refer to the charger selection guide. Please contact our technical department for advice if you have difficulty in locating suitable models or contact us at [www.motobatt.com](http://www.motobatt.com)

## Further Information

Please refer to our website [www.motobatt.com](http://www.motobatt.com) to locate a distributor in your area.