


# MOTOBATT

QuadFlex™ Battery  
 WWW.MOTOBATT.COM  
 MBTZ10S




## Brass Terminals (mm)



Terminal Screws: Stainless, M6 Thread  
 Fastener: 4mm Allen Hex

## Physical Dimensions: (in./mm)

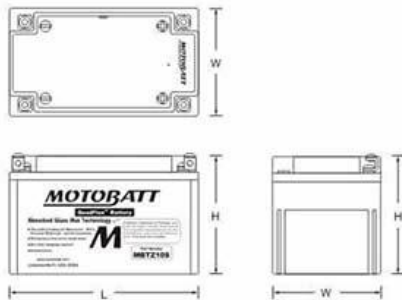

L: 5.94(151) W: 3.42(87) H: 3.74(95)

Tolerances are +/0.04in. (+/-1mm) and +/0.08in. (+/-2mm) for height dimensions.

## Features

- Patented Quad Terminal Design - Reduce carrying costs
- 12V VRLA Hi Capacity Starting Battery
- Absorbed Glass Mat (AGM) technology
- Brass Terminals - superior conductivity
- US IATA certified non-spillable
- Highest AH Capacity in the Industry
- Factory Activated-Ready to Install

## Performance Specifications

<b>Nominal Voltage</b> .....	12 volts (6 cells)
<b>Nominal Capacity</b>	
20-hr. (0.43A to 10.50 volts).....	9.0AH
10-hr. (0.86A to 10.50 volts).....	8.6 AH
5-hr. (1.72A to 10.20 volts).....	7.3 AH
1C. (8.6A to 9.6 volts).....	46Min (6.6AH)
8C. (68.8A to 6.00 volts).....	3Min (3.44AH)
<b>Approximate Weight</b> .....	6.39 lbs. (2.90kg)
<b>Energy Density</b> (20-hr. rate) .....	1.42W-h/in <sup>3</sup> (86.5 W-h/l)
<b>Specific Energy</b> (20-hr. rate) .....	16.9W-h/lb (37.2W-h/kg)
<b>Internal Resistance</b> (approx) .....	18 milliohms
<b>CCA</b> (-0.4°F/-18°C, 7.2V, 30S).....	140 amperes
<b>CA</b> (68°F/20°C, 7.2V, 30S).....	210 amperes
<b>Shelf Life</b> (% of nominal capacity at 68°F (20°C)).....	SOC% OCV
1 Months .....	97% 12.78V
3 Months .....	91% 12.7V
6 Months .....	83% 12.5V
<b>Operating Temperature Range</b>	
Charge .....	-4°F (-20°C) to 122°F (50°C)
Discharge .....	-40°F (-40°C) to 140°F (60°C)
<b>Case</b> .....	ABS
<b>Carton Contents</b> .....	1-MotoBatt MBTZ10S Battery, 4 stainless steel terminal screws, 2 pairs of brass terminals, 4mm Allen Wrench, Install / user manual.



RETAIL CARTON




\*C\* TERMINAL TERMINAL COVER SCREW WRENCH


All data subject to change without notice.

WWW.MOTOBATT.COM


**Shelf life & Storage**

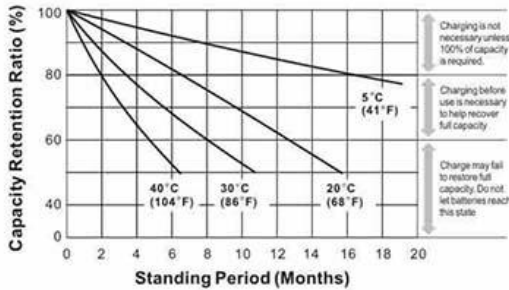


**Discharge Characteristics**

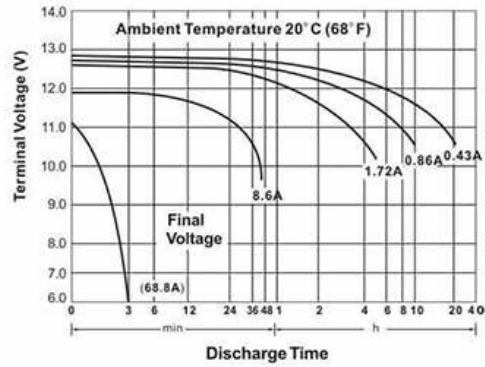

**Discharge Time vs. Discharge Current**

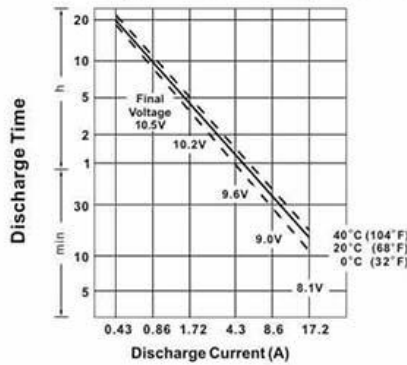

**Life Characteristics in Cyclic Use**

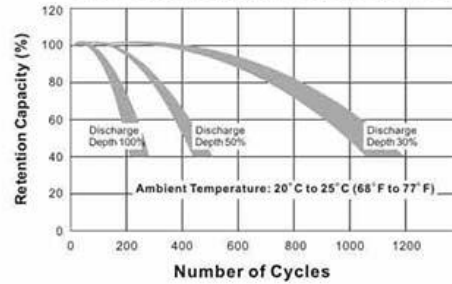

**Charging**

**Cycle Applications:** limit initial current to 2.58A. Charge until battery voltage (under charge) reaches 14.8 to 15.0 volts at 68°F(20°C). Hold at 14.8 to 15.0 volts until current drops to under 170mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

**Note:** Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

**Chargers**

MotoBatt offers a wide range of chargers suitable for batteries up to 2A. Please refer to the charger selection guide. Please contact our technical department for advice if you have difficulty in locating suitable models, or contact us at [www.motobatt.com](http://www.motobatt.com)

**Can be used to replace**

YTZ10S			

**Further Information**

Please refer to our website [www.motobatt.com](http://www.motobatt.com) to locate a distributor in your area.