

### Automatic Transfer Switches Standard Specific Breaker Rated

**ISO 9001**  
**KOHLER**  
NATIONALLY REGISTERED



#### Available Controllers

- Decision-Maker® MPAC 1200

#### Ratings

Current	Voltage	Frequency
30- 1200 amps	208- 600 VAC	50/60 Hz

#### Transfer Switch Standard Features

- UL 1008 listed  
file # E58962 (automatic), # E86894 (nonautomatic)
- CSA certification available
- IBC seismic certification available
- Available in 2, 3, or 4 pole configurations
- Electrically operated, mechanically held mechanism
- High withstand and close-on ratings
- Design suitable for emergency and standby applications on all classes of load, 100% tungsten rated through 400 amps
- Silver alloy main contacts
- Gold-flashed engine start contacts  
rated 2 amps @ 30 VDC/250 VAC
- Front-accessible contacts for easy inspection
- Front-replaceable main and arcing contacts (800- 1200 amps)
- Reliable, field-proven solenoid mechanism
- Switching mechanisms lubricated for the expected life of the transfer switch
- Internal manual operating handle
- Main shaft auxiliary position-indicating contacts  
rated 10 amps @ 32 VDC/250 VAC
- NEMA type 1, 12, 3R, 4, and 4X enclosures available
- Standard one-year limited warranty. Extended limited warranties are available.
- Standard-transition operation with either automatic or non-automatic control
- Standard-transition transfer time less than 100 milliseconds (6 cycles @ 60 Hz)
- Double-throw, mechanically interlocked design (break-before-make power contacts)
- Solid, switched, or overlapping (make-before-break) neutral

# Automatic Transfer Switch Controller

## Decision-Maker® MPAC 1200 Controller



- LCD display, 4 lines x 20 characters, backlit
- Complete programming and viewing capability at the door using the keypad and LCD display
- LED indicators: Source available, transfer switch position, service required (fault), and “not in auto”
- Programmable voltage and frequency pickup and dropout settings
- Programmable time delays
- Programmable generator exerciser
- Time-based load control
- Two programmable inputs and two programmable outputs
- Up to four I/O extension modules available
- Modbus communication standard
- RS-485 communication standard
- Ethernet communication optional

For more information about Decision-Maker® MPAC 1200 features and functions, see specification sheet G11- 127.

# Codes and Standards

The ATS meets or exceeds the requirements of the following specifications:

- CSA C22.2 No. 178 certification available, file #LR58301
- EN61000-4-4 Fast Transient Immunity Severity Level 4
- EN61000-4-5 Surge Immunity Class 4 (voltage sensing and programmable inputs only)
- IEC Specifications for EMI/EMC Immunity:
  - CISPR 11, Radiated Emissions
  - IEC 1000-4-2, Electrostatic Discharge
  - IEC 1000-4-3, Radiated Electromagnetic Fields
  - IEC 1000-4-4, Electrical Fast Transients (Bursts)
  - IEC 1000-4-5, Surge Voltage
  - IEC 1000-4-6, Conducted RF Disturbances
  - IEC 1000-4-8, Magnetic Fields
  - IEC 1000-4-11, Voltage Dips and Interruptions
- IEEE Standard 446, IEEE Recommended Practice for Emergency and Standby Power Systems for Commercial and Industrial Applications
- IEEE 472 (ANSI C37.90A) Ring Wave Test
- NEMA Standard ICS 10- 2005, Electromechanical AC Transfer Switch Equipment
- NFPA 70, National Electrical Code
- NFPA 99, Essential Electrical Systems for Health Care Facilities
- NFPA 110, Emergency and Standby Power Systems
- Seismic certification in accordance with the International Building Code is available. (Accessory kit is required for seismic certification.)
  - IBC 2000, referencing ASCE 7-98 and ICC AC-156
  - IBC 2003, referencing ASCE 7-02 and ICC AC-156
  - IBC 2006, referencing ASCE 7-05 and ICC AC-156
  - IBC 2009, referencing ASCE 7-05 and ICC AC-156
  - IBC 2012, referencing ASCE 7-10 and ICC AC-156
- Underwriters Laboratories UL 1008, Standard for Automatic Transfer Switches for Use in Emergency Standby Systems file #E58962 (automatic), #E86894 (nonautomatic)

## Application Data

Environmental Specifications	
Operating Temperature	- 20°C to 70°C (- 4°F to 158°F)
Storage Temperature	- 40°C to 85°C (- 40°F to 185°F)
Humidity	5% to 95% noncondensing

Auxiliary Position Indicating Contacts (rated 10 amps @ 32 VDC/250 VAC)	
Switch Rating, Amps	Number of Contacts Indicating Normal, Emergency
30- 230	2, 2
260- 1200	8, 8

Input and Output Connection Specifications	
Component	Wire Size Range
Main board I/O terminals	#12- 24 AWG
I/O module terminals	#14- 24 AWG

## Cable Sizes

**Note:** Cable size data is subject to change. Refer to the transfer switch dimension drawings and wiring diagrams for planning and installation.

UL-Listed Solderless Screw-Type Terminals for External Power Connections				
Range of Wire Sizes, Copper or Aluminum *				
Model	Switch Rating, Amps	Normal, Emergency, and Load (per phase)	Neutral (3-pole)	Ground
KSS	30- 150	(1) #14 AWG to 4/0 AWG	(3) #14 to 4/0 AWG	(3) #6 to 3/0 AWG
	200	(1) #14 AWG to 4/0 AWG <i>Cu only</i>	(3) #14 to 4/0 AWG <i>Cu only</i>	(3) #6 to 3/0AWG
	230 (208- 480 V)			
	230 (600 V)	(1) #4 AWG to 600 KCMIL or (2) 1/0 AWG to 250 KCMIL	(3) #4 AWG to 600 KCMIL or (6) 1/0 AWG to 250 KCMIL	(3) #4 AWG to 600 KCMIL or (6) 1/0 AWG to 250 KCMIL
	260- 400			
	600	(2) #2 AWG to 600 KCMIL	(6) #2 AWG to 600 KCMIL	(3) #4 AWG to 600 KCMIL or (6) 1/0 to 250 KCMIL
	800- 1000	(4) 1/0 AWG to 750 KCMIL	(12) 1/0 AWG to 750 KCMIL	
	1200 (NEMA 3R)			
1200 (NEMA 1)	(4) 1/0 AWG to 750 KCMIL	(12) 1/0 AWG to 750 KCMIL	(3) #4 AWG to 500 KCMIL	

\* Use 75°C minimum Cu/Al wire for power connections.

## Weights and Dimensions

**Note:** Always use the transfer switch dimension drawing for planning and installation. Weights and dimensions may vary for different configurations. See your local distributor for dimension drawings.

Weights and dimensions are shown for NEMA Type 1 enclosures, NEMA Type 3R enclosures and open units. See the transfer switch dimension drawings for other enclosure types.

Model	Amps	NEMA Type	Poles	Wires	Dimensions mm (in.)			Weight kg (lb.)			Dimension Drawing	
					Height	Width	Depth	2-Pole	3-Pole	4-Pole		
KSS	30- 200	1, 3R	2,3,4	3, 4	791 (31)	450 (18)	314 (12.4)‡	28 (62)	30 (65)	31 (68)	ADV-8566	
	230 (208- 480V)		2,3,4	3, 4	1223 (48)	560 (22)	362 (14.3)‡	52 (115)	56 (123)	59 (131)	ADV-8568	
	230 (600 V) 260- 600		2,3,4	3, 4	1702 (67)	610 (24)	514 (20.2)‡	179 (395)	183 (403)	188 (414)	ADV-8570	
	800		2,3,4	3, 4	1932 (76)*	864 (34)	515 (20.3)‡	220 (485)	231 (510)	238 (525)	ADV-8572	
	1000		3,4	4	1932 (76)*	864 (34)	515 (20.3)‡	—	231 (510)	238 (525)	ADV-8572	
	1200		3,4	4	2286 (90)	963 (38)	688 (27.1)	—	356 (785)	379 (835)	ADV-8574	
	Open Unit §	30- 200 230 (208- 480V) 230 (600V) 260- 600 800 1000 1200	3R	3,4	4	2286 (90)	940 (37)	717 (28.2)	—	356 (785)	379 (835)	ADV-8575
			Open Unit §	2,3,4	3, 4	787 (31)	445 (18)	296 (11.6)	8 (17)	9 (20)	11 (23)	ADV-7182
				2,3,4	3, 4	1219 (48)	457 (18)	330 (13.0)	17 (37)	21 (45)	24 (53)	
				2,3,4	3, 4	1422 (56)	610 (24)	362 (14.3)	31 (68)	34 (74)	36 (80)	
				2,3,4	3, 4	1829 (72)	864 (34)	508 (20)	68 (150)	78 (170)	90 (196)	
				3,4	4	1829 (72)	864 (34)	508 (20)	—	78 (170)	90 (196)	
3,4	4	2210 (87)	965 (38)	584 (23)	—	78 (170)	90 (196)					

\* Includes mounting feet

‡ On 30- 1000 amp models, the NEMA type 3R enclosures have a security cover on the controller that extends 54 mm (2.1 in.) beyond the door.

§ Dimensions shown for open units are the minimum required enclosure size. Open unit weights are shipping weights for the contactor only.

## Withstand and Close-On Ratings (WCR) Standard, Programmed, and Closed-Transition Models

Maximum current in RMS symmetrical amperes when coordinated with customer-supplied fuses or circuit breakers. All values are available symmetrical RMS amperes and tested in accordance with the withstand and close-on requirements of UL 1008. Application requirements may permit higher withstand ratings for certain size switches. Contact the factory for assistance.

Model	Switch Rating, Amps	Withstand Current Ratings in RMS Symmetrical Amperes						
		Current-Limiting Fuses				Specific Breaker		
		480 V Max.	600 V Max.	Amps, Max.	Fuse Class	240 V Max.	480 V Max.	600 V Max.
KSS	30	100kA	—	300	J	22kA	22kA	10kA
		200kA	35kA	200	J			
		35kA	35kA	200	RK1			
	70 104 150	200kA	35kA	200	J	150kA	85kA	25kA
		35kA	35kA	200	RK1			
	200	200kA	—	200	J	200kA	85kA	14kA
	230 (480V)	100kA	—	300	J			
	230 (600V) 260	200kA	200kA	600	J	200kA	200kA	42kA
				800	L			
	400 600	200kA	200kA	600	J	65kA	50kA	42kA
				800	L			
	800- 1200	200kA	200kA	1600	L	65kA	65kA	65kA

### Ratings with Specific Manufacturers' Circuit Breakers

The following charts list power switching device withstand and close-on ratings (WCR) in RMS symmetrical amperes for specific manufacturers' circuit breakers. Circuit breakers are supplied by the customer.

Model	Switch Rating, amps	WCR, amps RMS	Volts, Max.	Molded-Case Circuit Breakers				
				Manufacturer	Type or Class	Max. Size, amps		
KSS	30	22,000	480	GE	THED	40		
		150,000		Square D	HR	250		
		125,000			HL	150		
		100,000			BJ, HJ	125		
		65,000			BG, HG	125		
		42,000			QG, QJ	90		
		25,000			HD	150		
		25,000			BD	125		
	22,000	GE	THED	90				
	70	85,000	480	Square D	HL, HR	150		
		50,000			BJ	125		
		35,000			HG, HJ	150		
		18,000			BG	125		
					BD, HD	125		
					25,000	HJ, HL, HR	150	
		18,000 14,000			600	Square D	BJ	125
							HG	150
	BG		125					
	HD		150					
	BD		125					

Model	Switch Rating, amps	WCR, amps RMS	Volts, Max.	Molded-Case Circuit Breakers		
				Manufacturer	Type or Class	Max. Size, amps
KSS	104	150,000	240	Square D	HR	250
		125,000			HL	150
		100,000			BJ, HJ	125
		65,000			BG, HG	125
		42,000			QG, QJ	125
		25,000			HD	150
		22,000	480	Square D	BD	125
		85,000			THED	150
		50,000			HL, HR	150
		35,000			BJ	125
					HG, HJ	150
		18,000			BG	125
		25,000	600	Square D	BD, HD	125
					HJ, HL, HR	150
					BJ	125
					HG	150
BG	125					
18,000	HD				150	
14,000	BD	125				
KSS	150	150,000	240	Square D	HR	250
		125,000			HL	150
		100,000			BJ, HJ	125
		65,000			JG, JJ, JL, JR	200
		42,000			BG, HG	125
		25,000			QG, QJ	200
		22,000	480	Square D	HD	150
		85,000			BD	125
		50,000			THED	150
		35,000			HL, HR	150
					BJ	125
		25,000			HG, HJ	150
		18,000	BG	125		
		25,000	600	Square D	JG, JJ, JL	200
					BD, HD	125
					HJ, HL, HR	150
BJ	125					
HG	150					
18,000	BG				125	
14,000	HD	150				
KSS	200 230	200,000	240	Square D	BD	125
		125,000			JR	250
		100,000			JL	250
		65,000			JJ	250
		42,000	480	Square D	JG	250
		25,000			QG, QJ	225
		85,000			JD	250
		30,000			JL, JR	250
18,000	JG, JJ	250				
			JD	250		
KSS	230	42,000	600	Eaton/ Cutler Hammer	JGU, JGX, JGH	250
				GE	KDC	400
					LDC, CLDC	600
				Square D	TBC4	400
					SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGP	600
					HJ, HL, HG	150
					KI, JJ, JL, JR, CF250L	250
				Siemens/ITE	CK400H, CK400HH, CJ400L	400
					LI, MasterPact STR 28D, PK	600
					HJD, CFD6	250
	HHJD6, HHJXD6, CJD6, SCJD6	400				
	HHLD6, HHLXD6, CLD6, SCLD6, LNG, LPG, LGC*, LGU*, LGX*	600				

\* With Digitrip 310+ LS or LSG Inst. Override set to 12X.

Model	Switch Rating, amps	WCR, amps RMS	Volts, Max.	Molded-Case Circuit Breakers					
				Manufacturer	Type or Class	Max. Size, amps			
KSS	260	65,000	240	GE	THQMV	225			
					SGL1, SGL4, SGL6, SGP1, SGP4, SGP6	600			
				Eaton/Cutler Hammer	LDC, CLDC, HLD, CHLD	600			
				Siemens/ITE	HLD6, HLXD6	600			
				Square D	QG, QJ	250			
					LJ, LL, LR	600			
				50,000	480	Eaton/Cutler Hammer		HFDE, FDCE, HFD, FDC, LHH	225
								JDC, JGH, JGC, JGU, JGX	250
		HKD, HKDB, CHKD, CHKDB, KDC	400						
		HLD, CHLD, LDC, CLDC, LGH*, LGC*, LGU*, LGX*, NHH	600						
		MDL, CMDL, HMDL, CHMDL, NGS, NGH, NGC, MDLB, CMDLB, HMDLB, CHMDLB	800						
		GE	SFL, SFP, FEN, FEH					250	
		GE	TBC4			400			
			TBC6, TJL4V, TJL1S-6S, SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGN, FGH, FGL, FGP			600			
			TBC8, TKL4V, TKH8S-12S, TKL8S-12S, SKH8, SKL8, SKP8, TB8			800			
		Siemens/ITE	HFD6, HFXD6, HHFD6, HHFXD6, CFD6, HFG, LFG			250			
			HJD6, HJXD6, SHJD6, HHJD6, HHJXD6, CJD6, SCJD6, HJG, LJG, LLG			400			
			HLD6, HLXD6, SHLD6, HHL6, HHLXD6, CLD6, SCLD6, HLG			600			
			LMD, LMD6, LMXD, LMXD6, HLMD, HLMD6, HLMXD, HLMXD6, MD, MD6, MXD6, HMG, HMD6, HMXD6, SMD6, SHMD6, CMD6, SCMD6, LMG, MG			800			
		Square D	KI, KC, CF250L, NSF250			250			
			CK400N, CK400NN, CK400H, CK400HH, CJ400L, NSJ400			400			
			LC, DJ, DL, LJ, LL, LR, LI, NSJ600			600			
			CK800N, CK800NN, CK800H, CK800HH, MasterPact STR 28D, MJ, PK, PJ, PL	800					
			CK1000HL	1000					
		Square D	CK1200NN, CK1200HH	1200					
			JJ (Current Limiting)	250					
			JL (Current Limiting)	250					
		65,000	200,000	Square D		JR (Current Limiting)	250		
						65,000	100,000		
		42,000	600	Eaton/Cutler Hammer		JGU, JGX	250		
						KDC	400		
						LDC, CLDC	600		
GE	TBC4			400					
	TBC6, SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGP			600					
	TBC8, TKL4V, TKL8S-12S, SKL8, SKP8			800					
Siemens/ITE	HJD, CFD6			250					
	HHJD6, HHJXD6, CJD6, SCJD6			400					
	HHL6, HHLXD6, CLD6, SCLD6			600					
	HLMD6, HLMXD6, HMXD6, SHMD6, HMD6, CMD6, SCMD6, LMG, LNG, LPG, LGC*, LGU*, LGX*			800					
Square D	LI			600					
	CK400H, CK400HH, CJ400L			400					
	LI			600					
	CK800H, CK800HH, MasterPact STR 28D, PK			800					

\* With Digitrip 310+ LS or LSG Inst. Override set to 12X.

Model	Switch Rating, amps	WCR, amps RMS	Volts, Max.	Molded-Case Circuit Breakers				
				Manufacturer	Type or Class	Max. Size, amps		
KSS	400	65,000	240	GE	THQMV	225		
					SGL1, SGL4, SGL6, SGP1, SGP4, SGP6	600		
				Eaton/Cutler Hammer	LDC, CLDC, HLD, CHLD	600		
				Siemens/ITE	HLD6, HLXD6	600		
				Square D	QG, QJ	250		
					LJ, LL, LR	600		
				50,000	480	Eaton/Cutler Hammer	JGH, JGC, NHH	250
							HKD, CHKD, KDC, HKDB, CHKDB, LHH	400
		CHLD, LDC, CLDC, LGH*, LGC*, LGU*, LGX*	600					
		MDL, CMDL, HMDL, CHMDL, NGS, NGH, NGC, MDLB, CMDLB, HMDLB, CHMDLB	800					
		NGU	1600					
		GE	TBC4				400	
			TBC6, TJK4V, TJK1S-6S, SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGN, FGH, FGL, FGP				600	
		Siemens/ITE	TBC8, TKL4V, TKH8S-12S, TKL8S-12S, SKH8, SKL8, SKP8, TB8				800	
			HFD6, HFXD6, HFG, LFG			250		
			HJD6, HJXD6, SHJD6, HHJD6, HHJXD6, CJD6, SCJD6, HJG, LLG, LJG			400		
			HLD6, HLXD6, SHLD6, HHL6, HHLXD6, CLD6, SCLD6, HLG			600		
		Square D	LMD6, LMXD6, HLM6, HLMXD6, MD6, MXD6, HMD6, HMXD6, SMD6, SHMD6, CMD6, SCMD6, HMG, LMG			800		
			CK400N, CK400NN, CK400H, CK400HH, CJ400L, NSJ400			400		
			LC, DJ, DL, LJ, LL, LR, LI, NSJ600			600		
			CK800N, CK800NN, CK800H, CK800HH, MJ			800		
			CK1000HH			1000		
			PK, PJ, PL, MH, MasterPact STR 28D, CK1200HH			1200		
			Eaton/Cutler Hammer			KDC	400	
						LDC, CLDC, LGC*, LGU*, LGX*	600	
		GE	TBC4			400		
			TBC6, SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGP	600				
		Siemens/ITE	TBC8, TKL4V, TKL8S-12S, SKL8, SKP8	800				
			HHJD6, HHJXD6, CJD6, SCJD6	400				
			HHL6, HHLXD6, CLD6, SCLD6	600				
HLM6, HLMXD6, HMXD6, SHMD6, HMD6, CMD6, SCMD6, LMG	800							
Square D	LNG, LPG	1200						
	CK400H, CK400HH, CJ400L	400						
	LI	600						
	CK800H, CK800HH	800						
				MasterPact STR 28D, PK	1200			

\* With Digitrip 310+ LS or LSG Inst. Override set to 12X.

Model	Switch Rating, amps	WCR, amps RMS	Volts, Max.	Molded-Case Circuit Breakers				
				Manufacturer	Type or Class	Max. Size, amps		
KSS	600	65,000	240	GE	THQMV	225		
					SGL1, SGL4, SGL6, SGP1, SGP4, SGP6	600		
				Eaton/Cutler Hammer	LDC, CLDC, HLD, CHLD	600		
				Siemens/ITE	HLD6, HLXD6	600		
				Square D	QG, QJ	250		
		LJ, LL, LR	600					
		50,000	480	Eaton/Cutler Hammer	480	JGH, JGC, HFG, LFG	250	
						HLD, CHLD, LDC, CLDC, LGH*, LGC*, LGU*, LGX*	600	
						MDL, CMDL, HMDL, CHMDL, NGS, NGH, NGC, NGU, MDLB, CMDLB, NF	800	
						GE	TBC6, TJL4V, TJL1S-6S, SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGN, FGH, FGL, FGP	600
							TBC8, TKL4V, TKH8S-12S, TKL8S-12S, SKH8, SKL8, SKP8, TB8	800
				SKL12, SK12P	1200			
				Siemens/ITE	HLD6, HLXD6, SHLD6, HHLXD6, HHLXD6, CLD6, SCLD6, HLG, LLG	600		
					LMXD6, LMXD6, HLMXD6, HLMXD6, MD6, MXD6, HMD6, HMXD6, SMD6, SHMD6, CMD6, SCMD6, HMG, LMG	800		
					HND6, HNXD6, SND6, SHND6, ND6, NXD6, HNG, LNG, CND6	1200		
				Square D	LC, DJ, DL, LI, NSJ600	600		
					CK800N, CK800NN, MJ	800		
					MH, CK1200N, CK1200NN, CK1200H, CK1200HH, NT-H, NT-L1, NT-L, NT-LF, PK, PJ, PL	1200		
					CM2000HH	2000		
					CM2500HH	2500		
	42,000			600	Eaton/Cutler Hammer	600	JGC	250
		TBC4	400					
		LDC, CLDC	600					
		GE	TBC6, SGL1, SGL4, SGL6, SGP1, SGP4, SGP6, FGP		600			
			TBC8, TKL4V, TKL8S-12S, SKL8, SKP8		800			
			SKL12, SKP12		1200			
		Siemens/ITE	HHLXD6, HHLXD6, CLD6, SCLD6		600			
			HLMXD6, HLMXD6, HMXD6, SHMD6, HMD6, CMD6, SCMD6, LMG		800			
			HND6, HNXD6, HNG, LNG, SHND6		1200			
		Square D	LI		600			
	CK800H, CK800HH		800					
	CK1000HL		1000					
	CK1200H, CK1200HH, NT-H, NT-L, NT-LF, NT-L1, MasterPact STR 28D, PK		1200					
	800 1000 1200	65,000	480	Eaton/Cutler Hammer	HLD, CHLD, LGH, LGC, LGU, LGX, LDC, CLDC	600		
					HMDL, CHMDL, HMDLB, CHMDLB	800		
					HND, CHND, NDC, CNDC, NF	1200		
					NGH, NGC, NGU	1600		
					RGH, RGC	2500		
				GE	TBC6, TJL4V, SGL, SGP6	600		
					TBC8, SKL8, SKP8	800		
					SKL12, SKP12, TKL4V	1200		
				Siemens/ITE	HLXD6, HHLXD6, HHLXD6, CLD6, SHLD6, SCLD6, HLG, LLG	600		
					HMXD6, HMD6, SHMD6, HMG, LMG, CMD6, SCMD6	800		
			SHND6, CND6, HNXD6, HNG, LNG		1200			
			HPG, LPG, HPD, HPD6, CPD6, HPXD, HPXD6, SHPD, SHPD6		1600			
			600	600	600	Square D	HRD6, HRXD6	2000
							LI, LE LSI, LE LI, LX, LXI, LJ, LL, LR	600
							MJ, ME, MX, CK800H, CK800HH	800
							CK1000HL	1000
							NT-L1, NT-L, NT-LF, NE, NX, CK1200H, CK1200HH, PJ, PL	1200
NW, RJ, RL							1600	
PE, PX							2500	
SES, SE, SEH (LS or LSI TRIP)							3000	
SE (LI, LSI-E, and LI-E TRIP)	4000							
MasterPact STR 28D	6300							
Eaton/Cutler Hammer	Tri-Pac NB	800						
	RDC	2500						
Siemens/ITE	CND	1200						

\* With Digitrip 310+ LS or LSG Inst. Override set to 12X.



## Controller Accessories

See the controller specification sheets for more information.

### Accessory Modules

- Alarm Module
- External Battery Supply Module
- Input/Output Module
- High-Power Input/Output Module

### Controller Disconnect Switch

### Ethernet Communications

### Current Sensing Kit

### Padlockable User Interface Cover

### Supervised Transfer Control Switch

## Transfer Switch Accessories

Accessories are available either factory-installed or as loose kits, unless otherwise noted.

### CSA Certification

### Digital Meter

- Measure and display voltage, current, frequency, and power
- 35 programmable alarms
- LCD display, 67 x 62.5 mm (2.65 x 2.5 in.)
- Pushbutton operation
- Password-protected programming menus
- Two digital inputs
- Two digital outputs
- Two Form A relay outputs
- Serial port for optional network connections
- Data logging
- Factory-installed

### Engine Start Circuit Monitor

See Specification Sheet G6- 165.

### Export Packaging

- 10-year major components

### Extended Limited Warranties

- 2-year basic
- 5-year basic
- 5-year comprehensive

### Heater, Anti-Condensation

- Hygrostat-controlled 120 VAC strip heater (customer-supplied voltage source required)
- 100 or 250 watts (sized for enclosure)
- Protective 15 Amp circuit breaker

### Literature Kits

- Production literature kit (one set of literature is included with each transfer switch)
- Overhaul literature kit

### RSA III Remote Serial Annunciator

- Monitors the generator set
- Monitors Normal and Emergency source status and connection
- Monitors ATS common alarm
- Allows remote testing of the ATS
- For more information, see specification sheet G6- 139.

### Surge Protection Device (SPD)

- SPD available for the normal source supply
- Surge protection reduces transient voltages to harmless levels
- Protection modes: L-L / L-N / L-G / N-G
- Replaceable phase and neutral cartridges for service
- Frequency: 50- 60 Hz
- Operating Temperature Range: - 40 to 176°F (- 40 to 80°C)
- Remote contacts for customer-supplied status indicators:  
 Contacts: 1 NO, 1 NC  
 Min Load: 12VDC / 10 mA  
 Max. Load: 250 VAC / 1 A  
 Wire Size (max.): 16AWG
- Fuse protection: 30 amps / 600 V
- UL 1449, 3rd Edition for Type 2 applications
- IEC 61-643-1, 2nd Edition T2/11
- See additional SPD specifications below

## Seismic Certification


### IBC Seismic Certification

- Certification depends on application and geographic location. Contact your distributor for details.
- Available for all KSS enclosures.

SPD Specifications

Nominal Voltage (V ± 15%)	Max. Discharge Current (kA)	Phase	Poles	UL VPR 3rd Ed (L-N/N-G/L-G) (kV)	Limiting Voltage, (L-N/N-G/L-G) (kV)		Short Circuit Withstand Current (kA)	Maximum Continuous Operating Voltage (VAC)
					at 3kAmps	at 10kAmp		
240/120	40	Split	3	0.6 / 1.2 / 0.7	0.6 / 0.4 / 0.6	0.8 / 0.7 / 0.8	200	175 / 350
208/120	40	Wye	4	0.6 / 1.2 / 0.7	0.6 / 0.4 / 0.6	0.8 / 0.7 / 0.8	200	175 / 350
480/277	40	Wye	4	1.0 / 1.2 / 1.1	1.0 / 0.4 / 1.0	1.2 / 0.7 / 1.2	200	320 / 640
240/120	40	HLD	4	1.0 / 1.2 / 1.1	1.0 / 0.4 / 1.0	1.2 / 0.7 / 1.2	200	320 / 640
600/347	40	Wye	4	1.3 / 1.2 / 1.4	1.3 / 0.4 / 1.3	1.5 / 0.7 / 1.5	200	440 / 880

## Model Designation

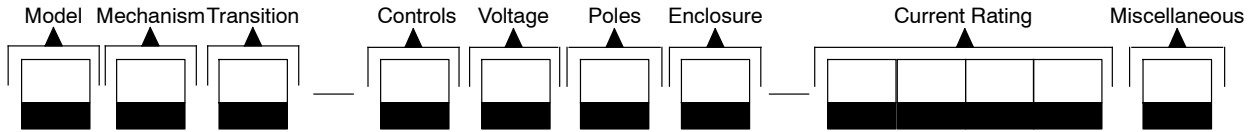

Record the transfer switch model designation in the boxes. The transfer switch model designation defines characteristics and ratings as explained below.

### Sample Model Designation: KSS-AMTA-0400S

#### Model

K: Kohler

#### Mechanism

S: Standard (Specific Breaker)

#### Transition

S: Standard

#### Controller

A: Decision-Maker® MPAC 1200, Automatic  
 B: Decision-Maker® MPAC 1200, Non-Automatic

#### Voltage/Frequency

C: 208 Volts/60 Hz	K: 440 Volts/60 Hz
D: 220 Volts/50 Hz	M: 480 Volts/60 Hz
F: 240 Volts/60 Hz	N: 600 Volts/60 Hz
G: 380 Volts/50 Hz	P: 380 Volts/60 Hz
H: 400 Volts/50 Hz	R: 220 Volts/60 Hz
J: 416 Volts/50 Hz	S: 400 Volts/60 Hz

#### Number of Poles/Wires

N: 2 Poles/3 Wires, Solid Neutral  
 T: 3 Poles/4 Wires, Solid Neutral  
 V: 4 Poles/4 Wires, Switched Neutral  
 W: 4 Poles/4 Wires, Overlapping Neutral

#### Enclosure

A: NEMA 1	D: NEMA 4
B: NEMA 12	F: NEMA 4X
C: NEMA 3R	G: Open Unit

#### Current, Amps

0030	0200	0600
0070	0230	0800
0104	0260	1000
0150	0400	1200


#### Connections

S: Standard

**Note:** Some selections are not available for every model. Contact your Kohler distributor for availability.

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® Power Systems distributor for availability.

**DISTRIBUTED BY:**



**Power Depot Inc.**  
 3553 N.W. 78th Ave.  
 Miami FL 33122, USA  
 (305) 592.7100