


Conversion Modules


3000K / 4000K




- Application: Residential use
- Convert 230V halogen & incandescent light fittings to LED with an LED Module.
- Sold as complete modules.
- Use as a complete module or clip-out sections for desired light output.
- Multiple fixing points for ease of installation.
- Complete with cable accessories.




Codes: LEDMODULE-S3K
LEDMODULE-S4K




Code: RING 1




Code: RING 2

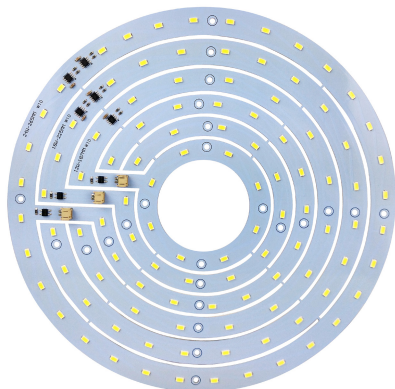


Codes: LEDMODULE-L3K
LEDMODULE-L4K



Code: RING 1



Code: RING 2



Code: RING 3

| Type: | Watts: | Lumens: | Lumens p/w: | CRI: | | |
|-------------------|-----------------------------|----------------|-------------|----------|----------|------------------|
| Small module - 3K | 12W + 12W (24W total) | 1920lm (total) | 80lm | > 80 | | |
| Small module - 4K | 12W + 12W (24W total) | 2160lm (total) | 90lm | > 80 | | |
| Large module - 3K | 24W + 18W + 12W (54W total) | 4320lm (total) | 80lm | > 80 | | |
| Large module - 4K | 24W + 18W + 12W (54W total) | 4860lm (total) | 90lm | > 80 | | |
| Product Code: | Ring: | Watts: | Lumens: | Kelvins: | LED qty: | Dimensions (mm): |
| LEDMODULE-S3K | 1 | 12W | 960lm | 3000K | 24 | 185Ø |
| | 2 | 12W | 960lm | 3000K | 24 | 161Ø |
| LEDMODULE-S4K | 1 | 12W | 1080lm | 4000K | 24 | 185Ø |
| | 2 | 12W | 1080lm | 4000K | 24 | 161Ø |
| LEDMODULE-L3K | 1 | 24W | 1920lm | 3000K | 48 | 265Ø |
| | 2 | 18W | 1440lm | 3000K | 36 | 225Ø |
| | 3 | 12W | 960lm | 3000K | 24 | 187Ø |
| LEDMODULE-L4K | 1 | 24W | 2160lm | 4000K | 48 | 265Ø |
| | 2 | 18W | 1620lm | 4000K | 36 | 225Ø |
| | 3 | 12W | 1080lm | 4000K | 24 | 187Ø |