

# EV - Button

Model: 14W , 20W & 28W





## Installation Instructions

All installations must be carried out by a qualified electrician following local regulations. Make sure that the power is switched off before installation. Please read and follow the 'Installation instructions' and 'Safety instructions' sections carefully before commencing installation.

Installation of this model can change from time to time please read instructions every time before installation. For detailed specification, please go to our website [eurotechlighting.co.nz](http://eurotechlighting.co.nz)

Code:	Colour:	Dimensions (mm):	IP Rating:	Kelvins:	Lumens:	Material:	Voltage:	Wattage:
EV14W3K	Available in White & Silver	290Ø x 50H	IP20	3000K	1000lm	Steel backplate & PMMA diffuser lens	230V	14W
EV14W4K				4000K	1150lm			20W
EV20W3K		350Ø x 50H		3000K	1500lm			20W
EV20W4K				4000K	1700lm			20W
EV28W3K		380Ø x 50H		3000K	2200lm			28W
EV28W4K				4000K	2450lm			28W

## Product Information

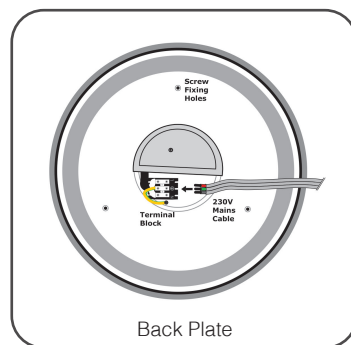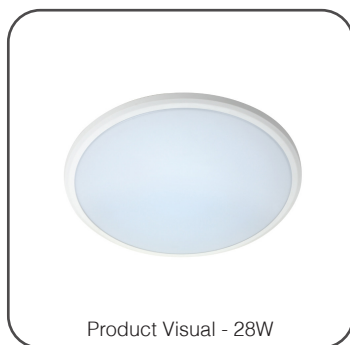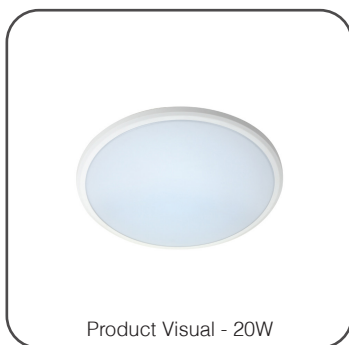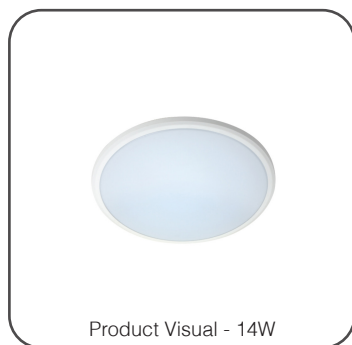

## Installation Instructions

**Note:** Recommended continuous operation - 12hrs max per day. Extended use beyond this may accelerate lumen depreciation and reduce luminaire life.

**3 Year Domestic Warranty:** 3 year warranty applies to all products installed in a domestic environment where the fitting is not in operation in excess of more than 12 hours per day.

**12 Month Commercial Warranty:** 12 month commercial warranty applies to all products installed in an environment where the fitting exceeds 12 hours of usage per day. For example, fittings that are continuously run as security or pathway lighting. Fittings are not designed to run 24/7.

1. Ensure power is switched off at main supply board.
2. Connect 230V mains cable to terminal block taking note of markings for L, N and (Earth) as indicated at the terminal block.
3. Position and hold backplate against ceiling/wall and screw the fixing screws through the three screw fixing holes in the backplate, taking special care to ensure the wiring is not pierced by the screws.
4. Fit the plastic diffuser by aligning the three rebates in the screw thread of the diffuser with with the three steel knobs in the back plate. Gently push the diffuser onto the backplate and rotate the diffuser clockwise to secure in place.

## Safety Instructions

Read these instructions carefully before commencing installation.

1. The light source contained in this luminaire shall only be replaced by the manufacturer or this service agent or a similar qualified person.
2. This LED luminaire must be installed by a licensed electrician ONLY following all local regulations.
3. Ensure that the cables will not be squeezed or damaged by sharp edges.
4. Clean the light with a soft cloth and a standard PH-neutral detergent.
5. Misuse of/or changes to the appliance shall void all warranties.
6. Do not install on a surface that is not suitable or deformed.
7. Do not install on or above a surface with a high temperature.
8. There should not be any materials that are corrosive, explosive.



For detailed specification, please go to our website [eurotechlighting.co.nz](http://eurotechlighting.co.nz)