


# FLD-4L Series INSTALLATION INSTRUCTIONS

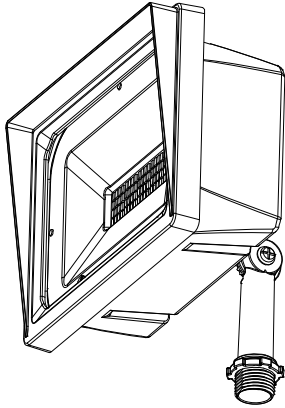

## MOUNTING USING 1/2" FITTER

**NOTE:** Fixture can be mounted to any metal 1/2" NPSM threaded mounting (supplied by others).

1. Route fixture leads through hole in mount.
2. Thread mounting onto end of fitter on fixture and secure with locknut. Using thread sealant on the threads will ensure a watertight seal.
3. Wire as indicated in **Electrical Connections** section.
4. Aim fixture by loosening screw on knuckle of fitter and rotating fixture to desired tilt angle. Re-tighten screw.

## CAUTIONS

### IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

### READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. **DANGER-** Risk of shock- Disconnect power before installation.
2. This luminaire must be installed in accordance with the NEC or your local electrical code. If you are not familiar with these codes and requirements, consult a qualified electrician.
3. Suitable for Wet Locations.

### SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

## ELECTRICAL CONNECTIONS

Fixture is equipped with 120volt driver only

### PHASE TO NEUTRAL WIRING 120V

1. Connect supply ground to fixture ground (green) lead.
2. Connect supply common to fixture neutral (white) lead.
3. Connect supply Vin to fixture hot (black) lead.

Tuck all wires carefully into wiring chamber ensuring that no wires are pinched.

### NOTES:

1. When mounting the fixture in an inverted position (1/2" fitter above fixture), mount fixture to a watertight junction box and cover. Also, caulk the conduit openings, around the junction box cover, and the wire entry end of the 1/2" fitter with a high grade caulking material, such as silicone rubber, to ensure water does not enter fixture through 1/2" fitter.