

INSTALLATION METHODS

PACKAGE INSIDE

- ◇ Hook (x1)
- ◇ Safety rope (x1)

TOOLS FOR INSTALLATION



Accessories installation

This product can be installed with pendant mount installation, surface mount installation, pole mount installation and PC globe reflector and other installation accessories.

I. Pendant mount installation (Standard version, chains excluded)

1. Screw in the hook first (FIG 1.1), then tighten the side lock screw (FIG 1.2);
2. Hang on the sling, then lock in the screw (FIG 1.3);
3. One end of the safety rope is buckled into the lamp structure, and the other end is installed on the corresponding ceiling structure (FIG 1.4);
4. Connect the wires to the input power source;
5. Select the proper power and CCT according to the switch on the housing after wiring the fixture.




FIG 1.1




FIG 1.2




FIG 1.3




FIG 1.4

II. Surface mount installation (Require bracket sold separately)

1. Use 1/2NPS screws to lock the ceiling bracket and lamps (FIG 2.1), then tighten the side lock screw (FIG 2.2);
2. First drill holes in the ceiling with a distance of 3.9" and a hole diameter of 0.5", and then knock in the expansion screws (FIG 2.3);
3. Install the ceiling bracket into the expansion screw corresponding to the hole position, then insert the flat washer and the spring washer, and lock the nut (FIG 2.4);
4. Adjust the bracket to the required angle (30° for each hole), and tighten the screws (FIG 2.5);
5. One end of the safety rope is buckled into the corresponding hole of the ceiling bracket, and the other end is installed on the corresponding ceiling structure (FIG 2.6);
6. Connect the wires to the input power source.
7. Select the proper power and CCT according to the switch on the housing after wiring the fixture.




FIG 2.1

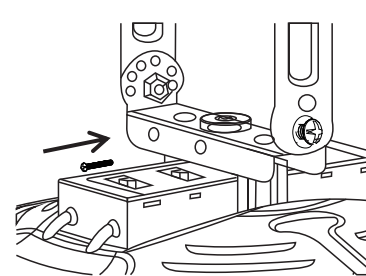


FIG 2.2

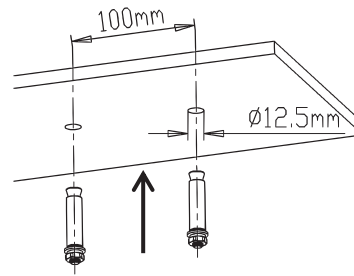


FIG 2.3




FIG 2.4




FIG 2.5




FIG 2.6




FIG 3.1




FIG 3.2

III. PC Globe Reflector Mounting

1. PC globe reflector with 60° and 90° beam angles;
2. Four screws lock the reflector to the lamp (FIG 3.1 and FIG 3.2);