


Putise



Generator set
Sound-proof type
DT1500P5S-AU

SPECIFICATIONS



1 Standards & Conditions

Design Standards

The designs and the productions are in conformity with:

- Conformite Europeenne (CE)
- ISO8528-5:2005
- AS 3000-2018
- AS 3010-2017

Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 80%.
- Altitude: Below one thousand (1000) meters.

Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


2 General Features

- PowerLink engine 16D52TWG4
- Close coupled to PowerLink alternator PL7B
- Microprocessor control module XC-762
- Main circuit breaker: 2500A
- Rotate speed governor: Electronic control unit
- Excitation system: PMG
- A.V.R model: MX341
- Key switch
- Emergency stop switch
- ATS (automatic transfer switch) receptacle
- 4x12V/150AH sealed for life maintenance free battery

- Lockable battery isolator switch
- Powder coated canopy
- Standard container
- 50°C radiator
- Fire extinguisher
- Oil pump on the engine
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Fuel tank with 5 hours running
- Drain points for fuel tank
- Fuel-water separator for fuel tank
- Operation Manual / Specification

3 Equipment


General technical data

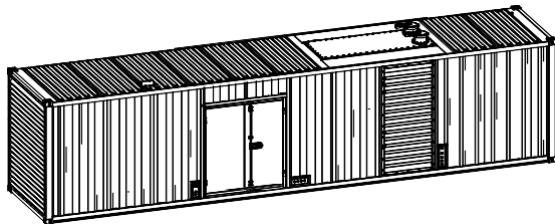

Model.	DT1500P5S-AU
Structure type	C
Tank capacity	1600L
Dry weight	15600kg
Noise level @7m	79dBA
Dimensions LxWxH	12192x2438x2896mm
Standby Power	1650kVA/1320kW
Prime Power	1500kVA/1200kW


Voltage	380V	400V	415V	440V
Ampere	2279A	2188A	2087A	1968A
Genset Fuel Consumption				
Frequency/Load	25%	50%	75%	100%
50Hz (L/h)	81	156	237	301
				332

Diesel engine

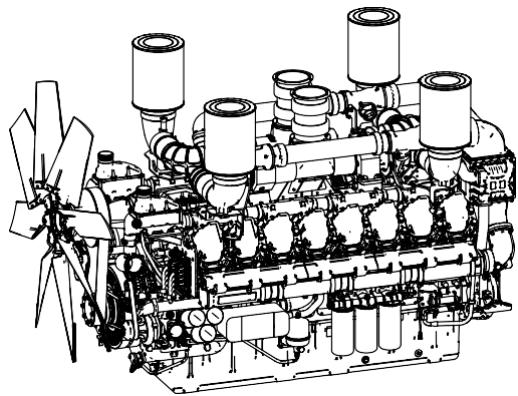


Engine Manufacturer/Brand	PowerLink
Engine Model	16D52TWG4
Dimensions LxWxH	2938x1740x2025mm
Dry Weigh (approx.)	5125kg
Number of Cylinders	16
Bore	150mm
Stroke	185mm
Displacement	52.3L
Compression Ratio	13.9
Type of injection	Direct injection
Intake System	Turbocharged and aftercooled
Intake Resistance	6.23kPa
Cooling System	Water cooled
Fan	Push
Battery Voltage	V
Type of Fuel	NO.2 or ASTMD975
Type of Oil	CH4/SG15W-40
Oil Capacity	171L
Type of Coolant	Glycol mixture
Coolant Capacity engine only	210L
Back Pressure	6.7kPa
Standby Power	1529kW
Prime Power	1390kW

Alternator

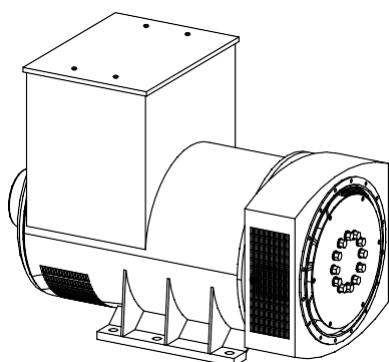

Alternator Manufacturer/Brand	PowerLink
Alternator Model	PL7B
Exciter	Brushless
Cooling Fan	Cast alloy aluminum
Windings	100% copper
Insulation Class	H
Winding Pitch	2/3
Terminals	12
Drip Proof	P23
Altitude	≤1000m
Overspeed	2250rpm
Air Flow	2.18m³/s(50Hz),2.63m³/s(60Hz)
Voltage Regulation	±0.5%
Total Harmonic TGH / THCat no load < 1.5 % - on load < 5%	
Telephone Interference	THF<2%;TIF<50


XC762 Control System

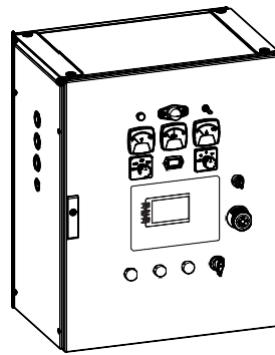


XC762 is an advanced control module based on microprocessor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, and automatically start the engine when the mains is abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the mains supply and genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- Real time clock for time and date display, overall runtime display, 250 log entries
- Overall power output display
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol

4 Overall Dimensions

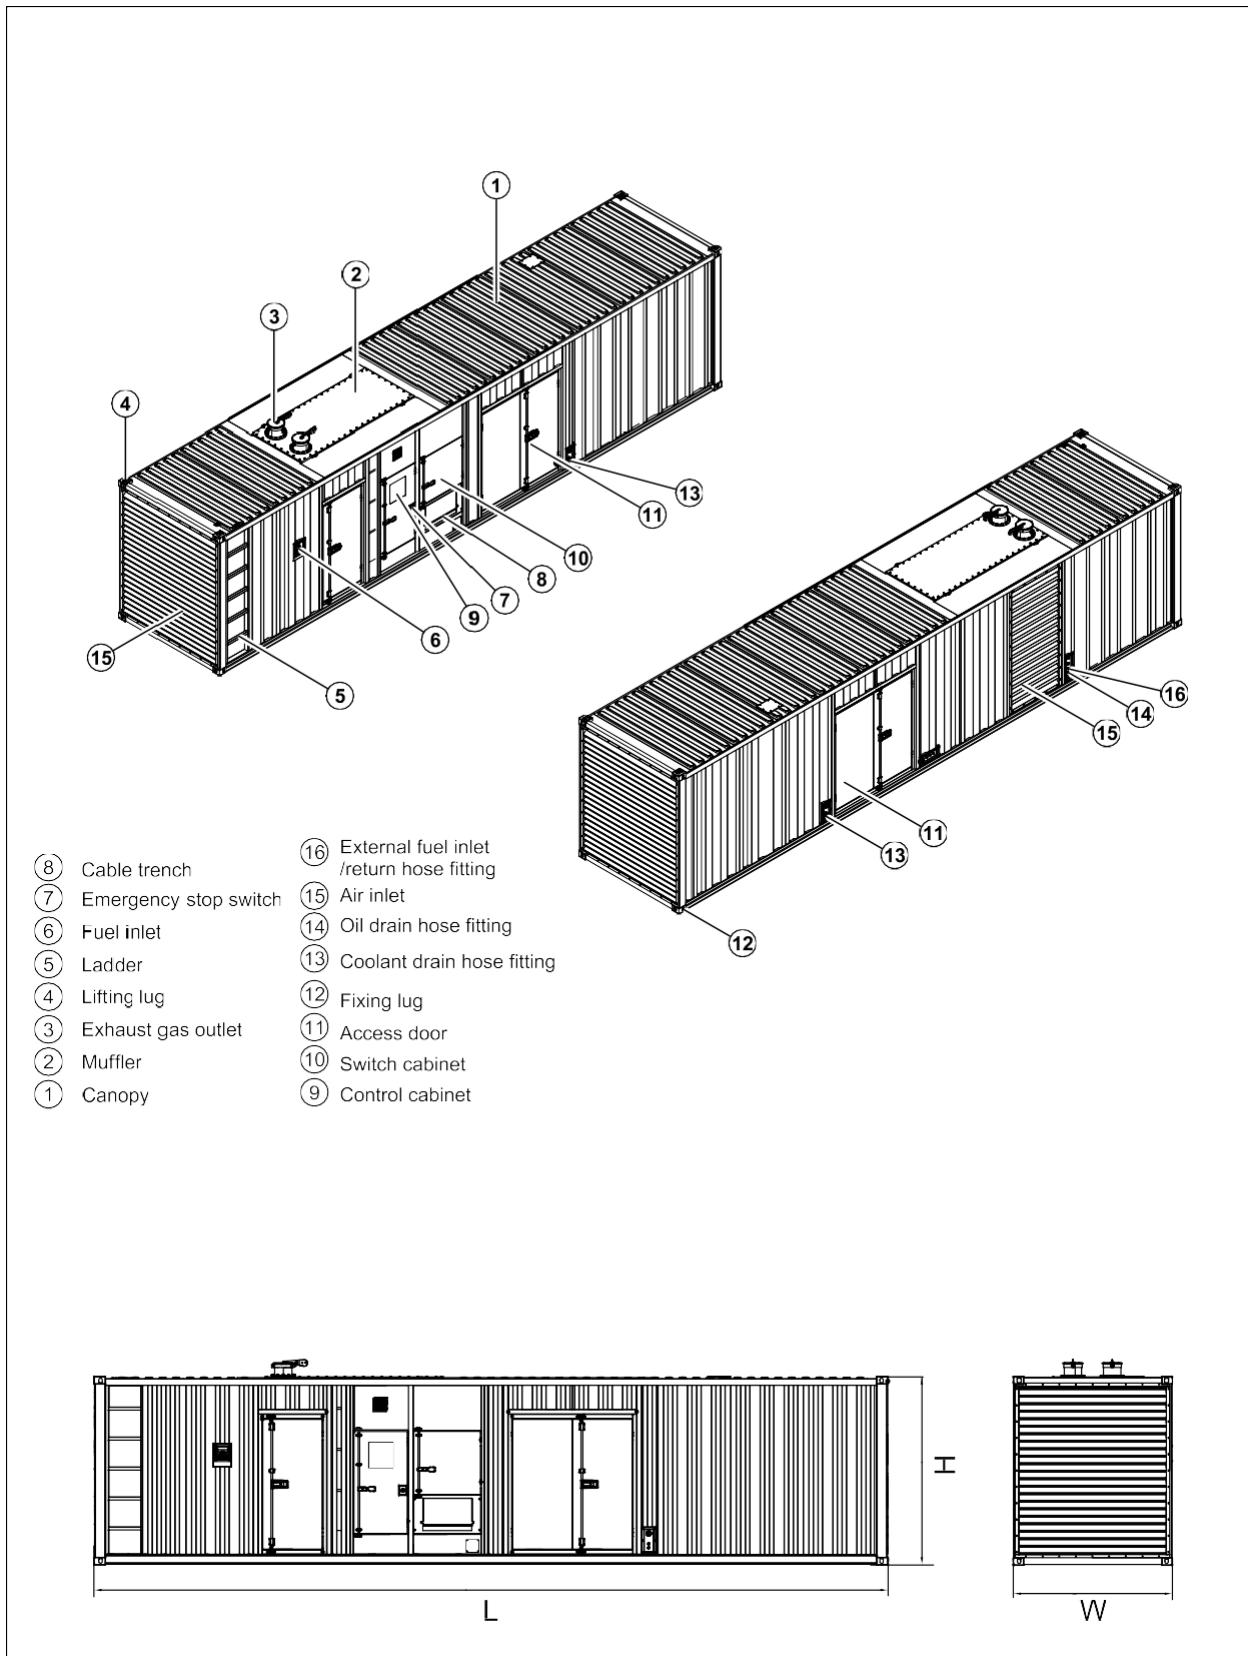

5 Control System

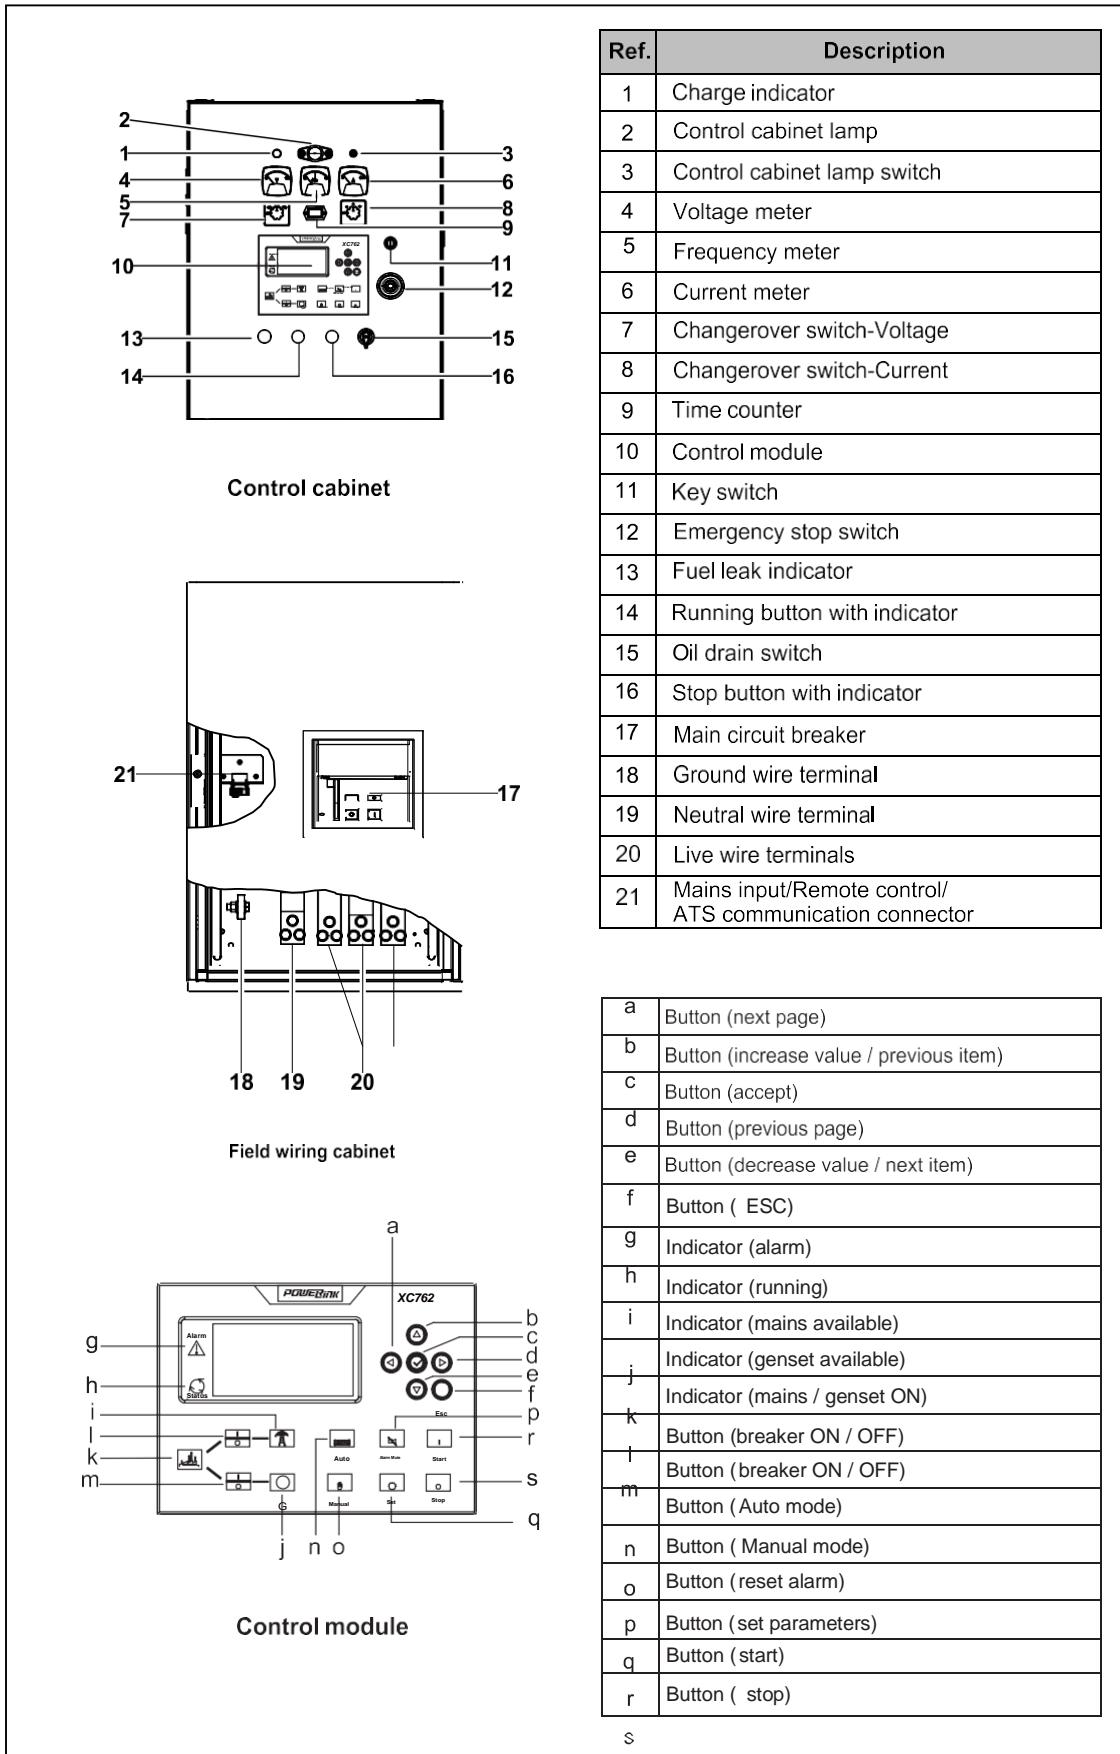

1000033917-A2-E

10.2020

<http://www.gogopower.com.au>

*Specification may change without prior notice. For more info.,
contact Gogopower or your local distributor please.*

2020 GOGOPOWER