

CHART

14-06-2016

0.6

LED 5W | 100-240VAC | 50-60Hz | PCB 3-step | incl. power supply

CE IP67 960°C 0.3m 38°

3000K | >80CRI | 150lm
inox

75216314

OPTIONAL
recessed housing

90012201

0.9

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE IP67 960°C 0.3m 38°

3000K | >80CRI | 480lm
inox

75226414

OPTIONAL
recessed housing

90012202

1.2

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE IP67 960°C 0.3m 38°

3000K | >80CRI | 480lm
beam angle 24°
inox

75235414


beam angle 38°
inox

75236414

OPTIONAL
recessed housing

90012203

OPTIONAL, (ORDER SEPARATELY)
recessed housing

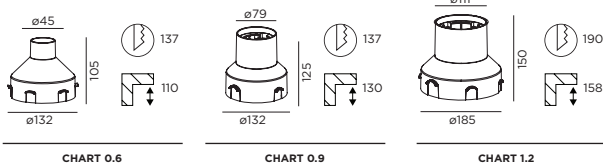

with recessed housing

CHART 0.6 & CHART 1.2



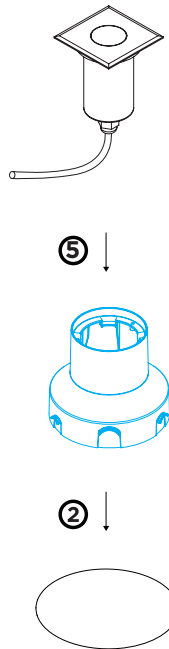


CHART 0.9

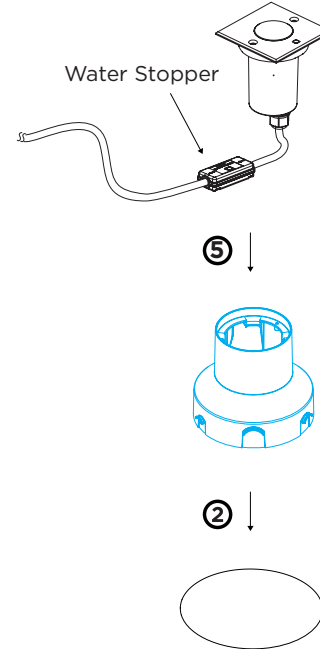


DIMENSIONS

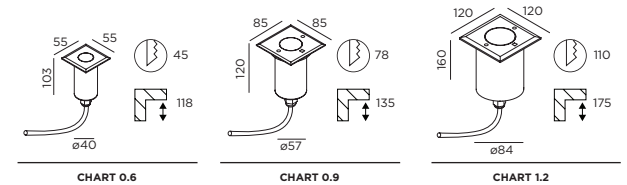


MOUNTING INSTRUCTION

- Remove the protective foam inside of the CHART. Make sure to screw the screws back on, crosswise, to ensure IP67
- Make a hole in the ground according to the prescribed dimensions (of the recessed housing)
- Drainage: we recommend that all exterior groundspots should be installed with a drainage level even when using a recessed housing



POWER CONNECTION

- Exterior: WATERPROOF Connection



Remark: Do not open or cut off the Water Stopper on cable.

MOUNTING WITH RECESSED HOUSING

- Use the bolts and the nuts to attach the CHART to the recessed housing

CHART

14-06-2016

0.6

LED 5W | 100-240VAC | 50-60Hz | PCB 3-step | incl. power supply

CE IP67 960°C 0.3m 38°

3000K | >80CRI | 150lm
inox

75216314

OPTIONAL

recessed housing

90012201

0.9

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE IP67 960°C 0.3m 38°

3000K | >80CRI | 480lm
inox

75226414

OPTIONAL

recessed housing

90012202

1.2

LED 8W | 220-240VAC | 50-60Hz | COB 2-step | incl. PS | phase-cut dim

CE IP67 960°C 0.3m 38°

3000K | >80CRI | 480lm
beam angle 24°
inox

75235414


beam angle 38°
inox

75236414

OPTIONAL


recessed housing

90012203




without recessed housing

A. Attached to the floor (or wall, for wall mounting)

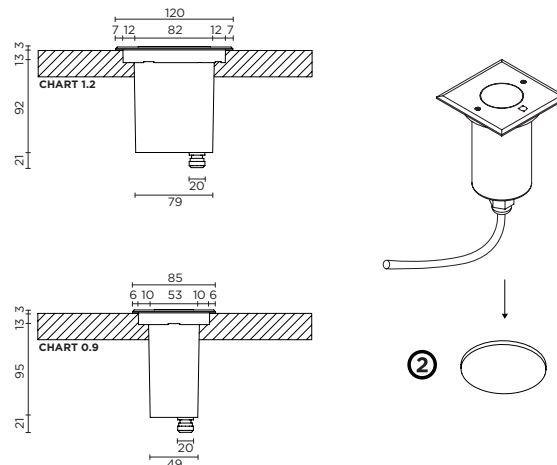


B. Rests on the stainless steel borders of the fixture

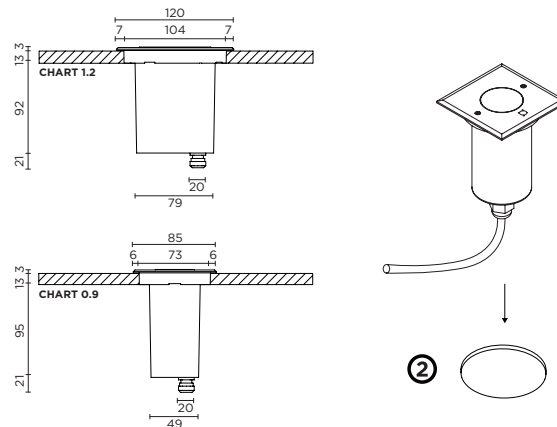


A. Attached to the floor (or wall, for wall mounting)

- ⑤ Use the screws to attach the CHART to the floor or wall. Make sure to measure correctly so that you can screw onto a hard material. This type of installation is not possible for CHART 0.6

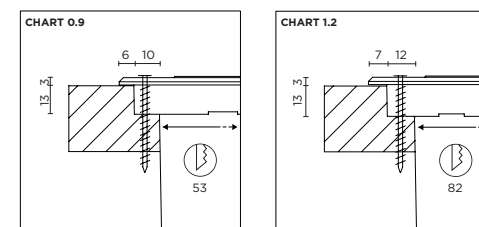

B. Rests on the stainless steel borders of the fixture

- ⑤ Place the CHART into the hole, no tools needed to fix it into the hole. Just let it rest on the stainless steel borders of the fixture

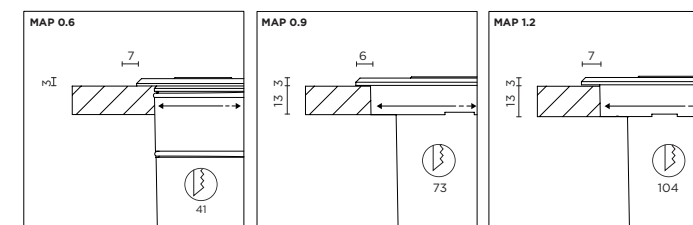

WEVER & DUCRÉ
LIGHTING

www.weverducre.com

INSTALLATION
INSTRUCTIONS
PAGE 2/2