


Lunar Large Pendant

Installation Instructions

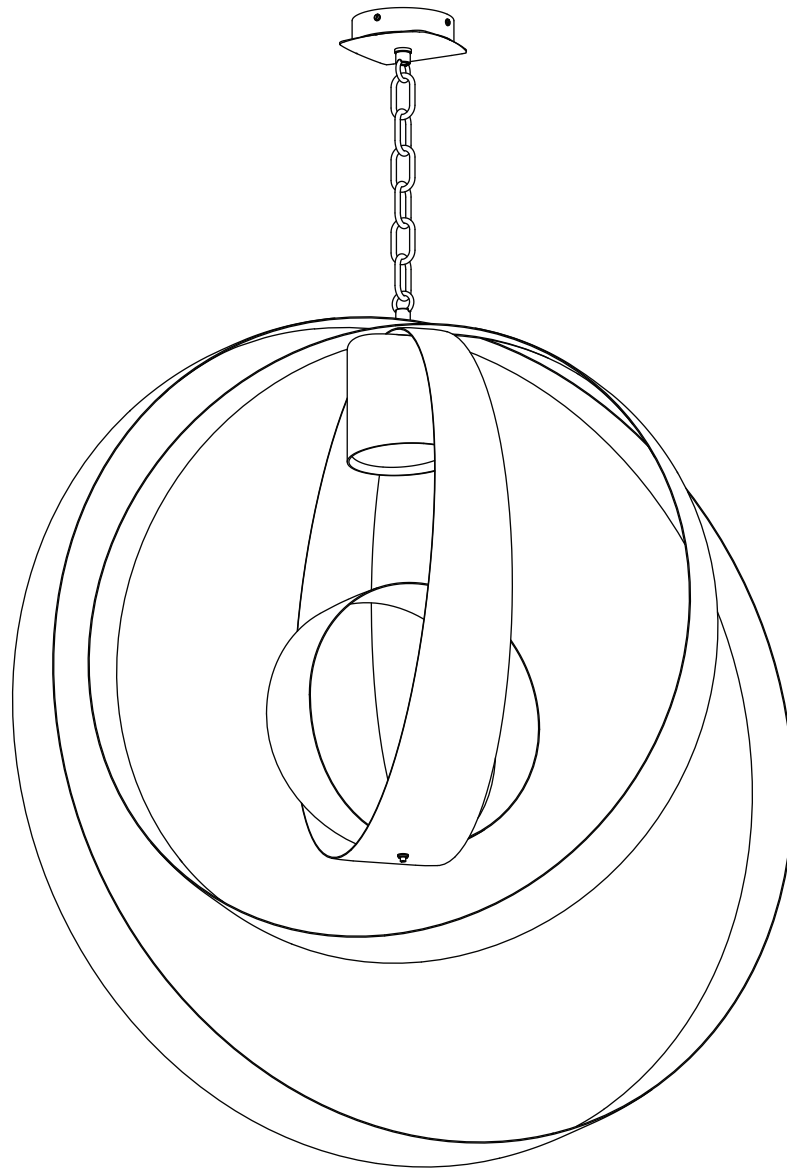

! Please handle with care and wear gloves at all times during assembly and installation to avoid damaging or marking components.

TECHNICAL


bulb holder	230v; 1 x E27, 60 W max (PAR30 LED recommended). 110v; 1 x E26, 60 W max (PAR30 LED recommended).
weight	17kg (37.5lbs)
cleaning	dust using a dry lint-free cloth as required
replacement/ repairs	please contact CTO Lighting
warranty	CTO Lighting warranty, 1 year from date of delivery
certification	CE compliant

COMPONENTS


Parts supplied as below, carefully unwrap them prior to installation



1x Zintec

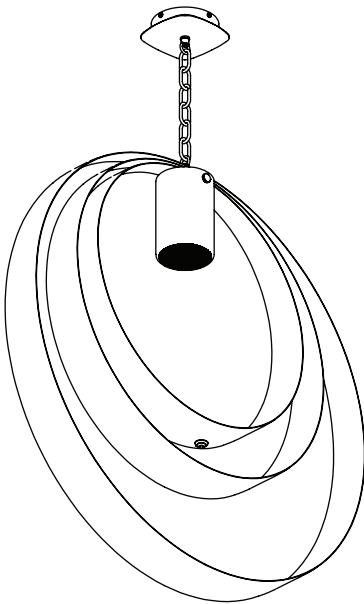

1x Lunar Large



1x Inside Ring


BEFORE INSTALLATION

- Installation must be carried out by a qualified electrician.
- A minimum of two people is required to install this pendant.
- Check that the ceiling fixing and components are suitable and strong enough to support the weight of the pendant.
- Always wear soft cotton gloves when installing the fixture.

1.


For 230v.

Fix the ceiling plate to the ceiling.
Ensure that suitable screws are being used
for the surface you are mounting to.

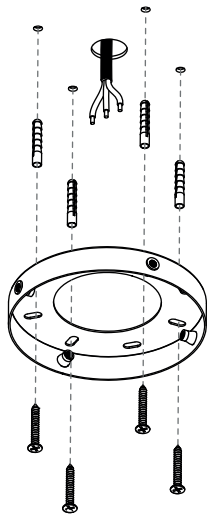

For 110v.


Attach the zintec onto the junction box
(screws do provided).

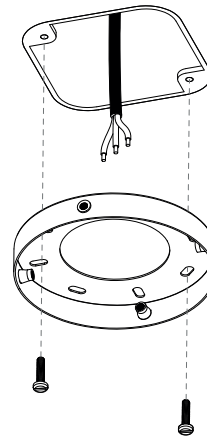

2.


Raise the pendant towards the ceiling and
make the electrical connection.
Further raise the pendant, closing the ceiling box
to the ceiling plate and secure
with the provided screws.

NOTE: Ensure that the weight of the pendant
is fully supported during the
electrical installation.

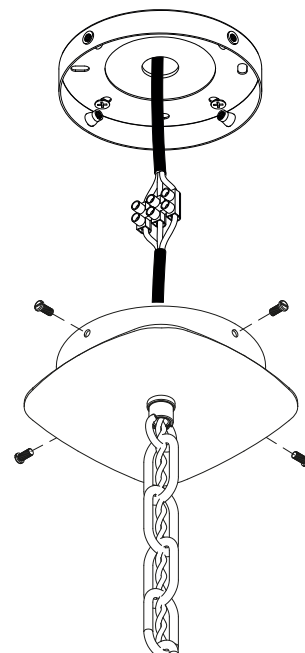


3.

Unscrew the two thumb-turn screws from the top of the can and gently lower down the can. Fit the bulb (not supplied), raise the can and screw the two screws back into place carefully.

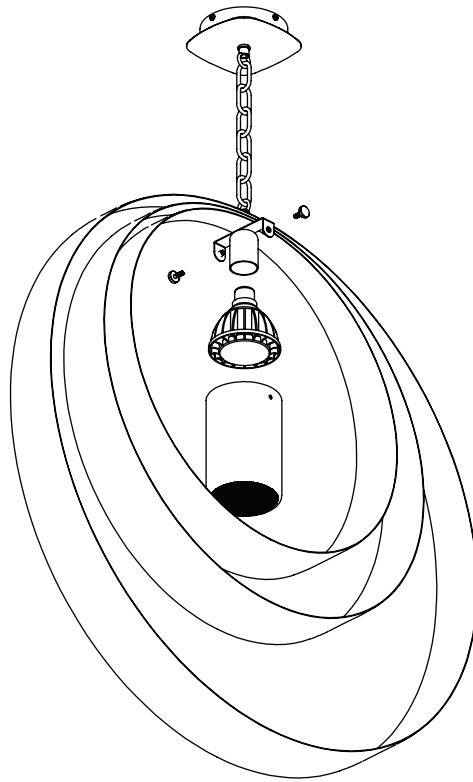


4.

Unscrew the bolt off the inner ring, bring the inner ring to the Lunar Large body and screw into place securely.

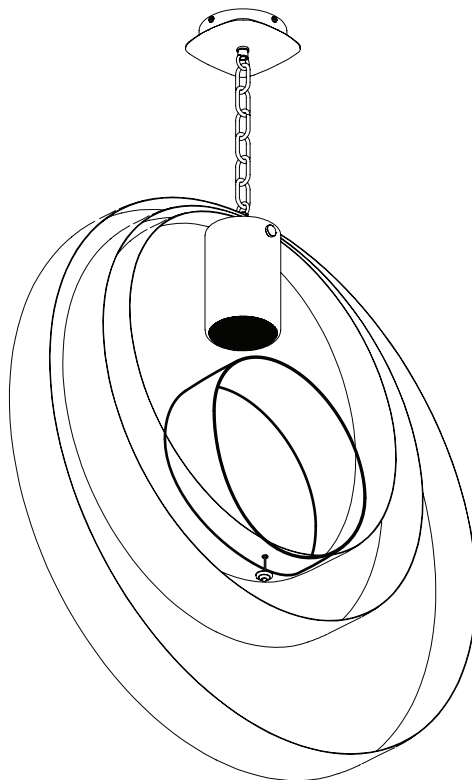


5.

Open the rings out of the Lunar Large as shown in the illustration.

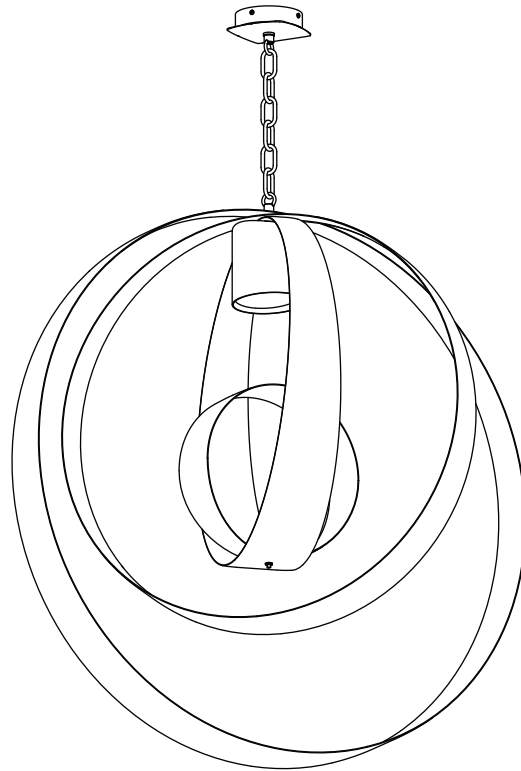

TO REPLACE THE BULB

Remove the can as per Step 3, replace the bulb, raise the can and screw it back to the bracket by using the two brass thumb-turn screws.

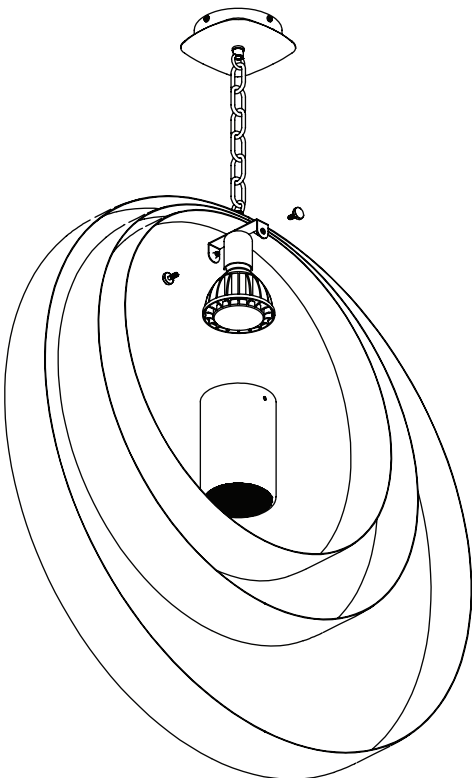

CTO Lighting
9 Cloudesley Road
London
N1 0FH

tel: +44 (0)20 7686 8700
fax: +44 (0)20 7686 8701

info@ctolighting.co.uk
www.ctolighting.co.uk