

# T800.H.MOON Curve LED Track Light

## Datasheet




### Product codes

|                             |   |                      |  |                                 |  |   |
|-----------------------------|---|----------------------|--|---------------------------------|--|---|
| <b>Unit:</b><br>T800.H.MOON | <b>Base Type:</b><br>H1 (H-Track)<br>E3 (Eurotrack) | <b>Series:</b><br>CR | <b>Colour temp.:</b><br>2.7K<br>3K<br>4K<br>5K | <b>Beam angle (°):</b><br>DF120 | <b>Colour:</b><br>B (Black)<br>W (White) | <b>Driver</b><br>ND (Non-Dimmable)<br>PHASE (Phase)<br>010V (0-10V) |
|-----------------------------|---|----------------------|--|---------------------------------|--|---|

### Electrical

|   |                                   |                            |                                     |                           |                                   |
|---|-----------------------------------|----------------------------|-------------------------------------|---------------------------|-----------------------------------|
| <b>Colour temperature:</b><br>2700K or 3000K or<br>4000K or 5000K | <b>Input voltage:</b><br>220-240V | <b>Power usage:</b><br>12W | <b>Driver power factor:</b><br>>0.6 | <b>IP rating:</b><br>IP20 | <b>Dimmable:</b><br>Phase<br>010V |
|---|-----------------------------------|----------------------------|-------------------------------------|---------------------------|-----------------------------------|

### Dimensions (mm)




### Operational

|  |                                       |  |
|--|---------------------------------------|--|
| <b>Lumen output:</b><br>2.7K: 765 lm<br>3K: 780 lm<br>4K: 795 lm<br>5K: 865 lm | <b>Light quality (CRI):</b><br>>90CRI | <b>Ambient temp.:</b><br>-20°C to 50°C |
|--|---------------------------------------|--|

### Physical


|                             |                                |
|-----------------------------|--------------------------------|
| <b>Warranty:</b><br>5 years | <b>Mounting type:</b><br>Track |
|-----------------------------|--------------------------------|

## Installation

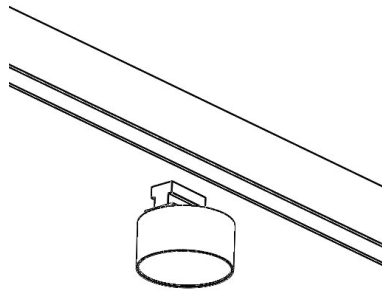


### Step 1

Align the track connector with the track.

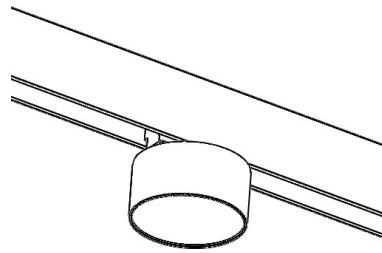


### Step 2

Insert the T800.H.MOON-CR into the track channel, ensuring the track base tabs are in the open position and that the direction of the T800.H.MOON-CR is correct. This is dependent on where the contact points are in the track.

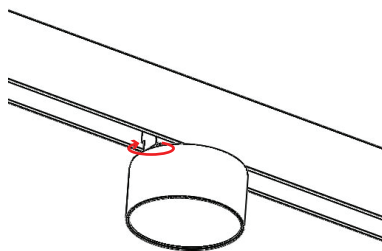

### Step 3

Push the locking tabs into the track base to secure the fitting.

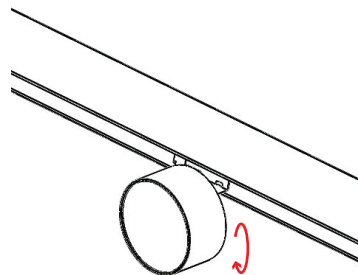

### Step 4

Once the light is locked into the track, orient the luminaire to focus the light as required.