


# Wall Spot

WS

## DESCRIPTION

The Wall Spot has been designed to be mounted onto walls and provide directional light for pathways and structural elements of a building. The spotlight can be aimed in any direction, with a fully adjustable arm allowing 360 degree rotation and 0-90 degree elevation.

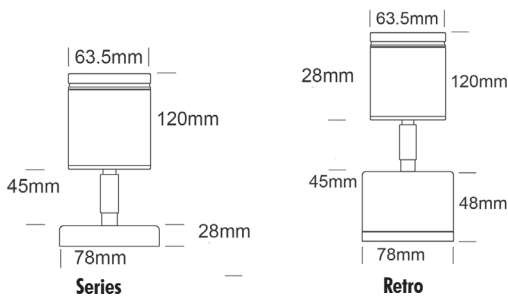

## PURE LED

LED Chip	Cree XHP-50-2 Plug and Play, field replaceable LED board, 6Vf
Output	600 lumens @ 1050mA max
Lumens Per Watt	100lm/W
Power Consumption	6 watts @1050mA
Colour Temperature	2700K, 3000K and 4000K
CRI Warm White (3000K)	90 standard
Beam Angle	15, 25, 38, 60 degrees

\*Specification for pureled only for retrofit lamp options please see alternative lamps page.

## PHYSICAL PROPERTIES

Materials	Powdercoated Aluminium, Solid Copper or 316 Stainless Steel
Ingress Protection	IP66
Standards	CE, EN60598, AS/NZS 61046, UL 1838, CSA C22.2 No. 250.7

## POWER SUPPLY OPTIONS

DRIVER REQ FOR SERIES WIRED ( CC FORMAT ) \*\* | TRANSFORMER REQ FOR PARALLEL WIRED ( CV FORMAT )\*\*\*  
 NO DRIVER REQ FOR RETRO 'R' ( INTEGRAL 230V IN ) | NO DRIVER REQ FOR GUTO

\*\* See pages 3-5,7,9 power supplies

\*\*\* See pages 11-12 power supplies

CATEGORY  
WALL MOUNT

### LUMINAIRE

WS

- /L/S
- /L/D3
- /L/D7
- /L/D10
- /L/R
- MR16
- MR16/R
- GUTO

### POWER

- 1050mA INPUT (CC) SERIES WIRED
- 2W, 12VAC INPUT (CV) PARALLEL WIRED
- 4W, 12VAC INPUT (CV) PARALLEL WIRED
- 6W, 12VAC INPUT (CV) PARALLEL WIRED
- 4W, RETRO, 110-240V DRIVER
- 12V 5W RETROFIT LAMP
- 5W RETROFIT LAMP with integral 230V Driver
- 7W SORAA RETROFIT LAMP 230V

### BEAM

- 15
- 25
- 38
- 60

### COLOUR

- 15°
- 25°
- 38°
- 60°

### ACCESSORIES

- 2 2700K
- 3 3000K
- 4 4000K

- HCL HEX CELL LOUVRE
- SNT SNOOT
- GG GLARE GUARD
- FL FROSTED LENS
- LKN LOCKING KNUCKLE
- CIK CABLE JOINT KIT

### MATERIAL/ FINISH

- BK BLACK
- BZ BRONZE
- OGR OLIVE GREEN
- WH WHITE
- WB WHITE BIRCH
- DG DARK GREY
- STAR SILVER STAR
- CT CORTEN
- COP SOLID COPPER
- SS STAINLESS STEEL

### /L/S PURELED SERIES WIRED /L/D PURELED PARALLEL WIRED /L/R PURELED 110/240VAC RETRO DRIVER

Remote constant current driver required.

Individual fixtures require:  
 6VDC@1050mA,  
 1050mA maximum

Remote 240V - 12VAC transformer required. Hunza integrated plug and play driver included.  
 Input: 9-15VAC.  
 Output: 6VDC @ D3=350mA,  
 D7=700mA, D10=1050mA

Input: 110/240VAC, 12 Watt max (included)  
 Output: 1-18VDC, 700mA

PRODUCT CONFIGURATION