




# CHARGit

INTELLIGENT WIRELESS CHARGING

## Under Surface Long Distance 10W Wireless CHARGhub



Please read these instructions carefully before use

[www.chargitstore.com](http://www.chargitstore.com) [hello@chargitstore.com](mailto:hello@chargitstore.com) 0333 700 8889

# Component List



Magnets x2



Fixing Screws x3



User Manual x1




Power Adapter x1



Marker Sticker x1



Marker Template x1



Mounting Bracket x1  
Pre-Fitted with 3M Tape




Wireless Charger x1

# CHARGit Wireless Charger

This wireless charger is compatible for all qi/MagSafe standard devices.


Charging distance can reach up to a maximum of 30mm. Through wood, glass, acrylic, marble, granite and all other hard surfaces.

**WARNING:** Please do not use through metal surfaces. Please do not place a device directly on to the charging unit, minimum distance of 15mm should be kept.

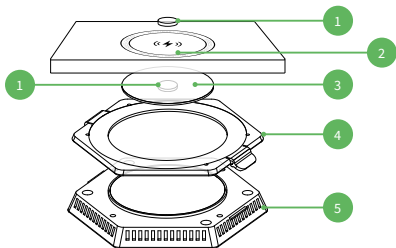

# Installation Steps


1. Select on your chosen surface where you will position your wireless charger (We suggest that you test that a compatible phone can charge through the surface before proceeding).
2. Stick the marker sticker and place one magnet in the center.
3. On the underside of the surface align the second magnet with the first and place the marker template over the magnet.
4. Remove the magnets. Stick or Screw the mounting bracket, using the marker template for alignment.
5. Plug the Power adapter into the charger and click the charger into the mounting bracket, the charger can only fit into the bracket one way.
6. Plug the power adapter into the mains, a red light should indicate that the power is on.
7. Place your compatible device onto the marker sticker, the green light will now indicate device is charging.

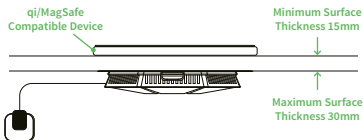

## For Surfaces Thicker Than 30mm

For surfaces more than 30mm thick we advise to route an area of 150mm x 140mm to hold the charger.

Please ensure you position the charger to allow room for the power cable before securing the bracket.

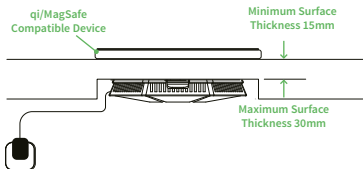

## Power Indicator Lights

<b>Power On</b>	Red Light
<b>Charging</b>	Green Light
<b>Abnormal (FOD)</b>	Flashing

## Warnings

1. Install the charger according to the instructions.
2. Do not install the charger under any metal object.
3. Do not place any metal objects or magnetic fields such as credit debit cards etc onto the charging area.
4. Keep away from humidity and heat.
5. Do not cover the fan when using.
6. Unplug this device when unused for long periods of time.
7. Disconnect the power before cleaning the charger.
8. Keep it beyond the reach of children.
9. Please always use the original power adapter.

# Trouble Shooting

If your device is not charging

1. Please ensure your device is compatible with qi/MagSafe wireless charging
2. Make sure your device is aligned on the charging area.
3. Remove your case from your phone.
4. Ensure the charger is secured into the fixing bracket, power adapter is connected and switched on.

## Product Specification

<b>Name</b>	Long Distance Wireless Charger
<b>Model No.</b>	CIS06B
<b>Input</b>	29V 1A
<b>Wireless Output</b>	10W/7.5W/5W
<b>Charging Distance</b>	15-30mm (coil to coil)
<b>Working Frequency</b>	125-135kHz
<b>Dimensions</b>	135 x 120 x 23mm
<b>Protection</b>	FOD, OTP, OVP, OCP
<b>Material</b>	ABS+PC
<b>Weight</b>	215g

The images in this manual are for illustration purposes only, the actual product may vary.

- In accordance with the FCC rules, this equipment has been tested and found to comply with the limits for a Class B digital devices. This equipment may cause interference to other equipment if not installed and used in accordance with these instructions.

## Warranty

Your purchase includes 12 months warranty.

Please call or email us for any further information,  
[hello@chargetstore.com](mailto:hello@chargetstore.com) 0333 700 8889.



**RoHS**  
compliant



Made In China





**CHARGit**  
INTELLIGENT WIRELESS CHARGING

[www.chargitstore.com](http://www.chargitstore.com)

[hello@chargitstore.com](mailto:hello@chargitstore.com)

0333 700 8889