

CARVIN

722 Loudspeaker System

The 722 two-way 200 watt 12" stage monitor offers a rich smooth frequency response and high power handling capability in a compact enclosure. This system is designed to provide clarity and presence on stage.



SAMPLE
A

CARVIN

722 Loudspeaker System

The 722 two-way 200 watt 12" stage monitor offers a rich smooth frequency response and high power handling capability in a compact enclosure. This system is designed to provide clarity and presence on stage.

CONGRATULATIONS on your selection of CARVIN products: "The Professional's Choice." Your new speaker system demonstrates CARVIN's commitment to producing the highest quality & most thoroughly engineered products in pro audio.

Please send in the warranty card. It will allow us to better understand how you are using the equipment while keeping a ready reference for our files.

RECEIVING INSPECTION

INSPECT YOUR SPEAKER SYSTEM FOR ANY DAMAGE which may have occurred during shipping. If any damage is found, notify the shipping company and call CARVIN immediately.


SAVE THE CARTON & ALL PACKING MATERIALS. In the event you have to re-ship your speaker, always use the original carton and packing material. This will provide the best possible protection for your speaker during shipment. **CARVIN and the shipping company are not liable for any damage caused by improper packing.**

SAVE YOUR INVOICE. It will be required for warranty servicing of your unit. Always check your invoice against the items you have received.

SHIPMENT SHORTAGE. If you find items missing, it may be that they were shipped separately. Please allow several days for the rest of your order to arrive before inquiring. If you determine (after allowing an appropriate amount of time) you have not received all the items you ordered, please call CARVIN.

SYSTEM CONNECT PLATE

For maximum versatility, you have a choice of 1/4" phone or XLR connectors. **XLR CONNECTOR WIRING: Pin 1: GROUND, Pin 2: HOT (red binding post on your amp), Pin 3: Not used.**

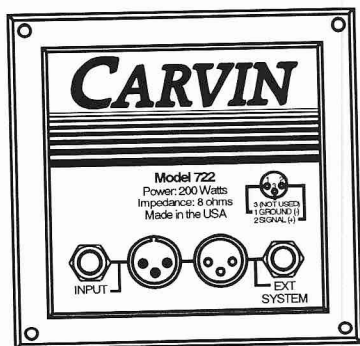

SPEAKER CABLES

CARVIN offers its standard 50' PH50 speaker cable featuring heavy-duty 16 ga copper wire and 1/4" phone plugs for speaker to amp hookups. For amps that feature XLR speaker output connectors, you may select the heavy-duty CARVIN 50' XLR XP50 speaker cable. For longer runs over 150', 14 ga. wire is recommended. **IMPORTANT: Do Not Use Shielded Guitar or XLR Mic Cables. Using a shielded cable could cause your amp to "thermal protect" and shut down.**

SUGGESTIONS FOR OPTIMAL PERFORMANCE

1) Use a graphic or parametric equalizer to reduce feedback from your monitor speaker (**feedback may damage your drivers**). 2) Never direct your microphone towards the speaker. 3) For greater monitor levels, add a second monitor speaker. 4) **CAUTION: Using a high powered amplifier in its "Bridged" mode may exceed the power rating of this system and damage all system drivers.**

DRIVER PRECAUTIONS


Be advised of the following conditions to protect your speaker system: 1) **DO NOT EXCEED THE POWER RATING** marked on the rear connect plate (Carvin systems are conservatively rated allowing occasional peak power above the normal rating. However, excessive power will destroy the drivers). 2) **DISTORTION (square wave) will destroy drivers regardless of power ratings.** 3) **WATER, MOISTURE, and DUST** are harmful to drivers causing failure that is not covered under warranty.

DAISY CHAINING (EXTENSION SPEAKER)

The Rear Connect Plate on all CARVIN speaker systems permit extending ("Daisy Chaining") one additional speaker system to your amp. It is not recommended that you "daisy chain" more than one system. You must also recalculate the total speaker impedance to your amp. If your speaker has a 8Ω impedance and you daisy chain another 8Ω speaker, your total impedance is 4Ω. Most power amps are not designed for less than 4Ω or they will "thermal protect" and shut down. If you are using the 1/4" Phone Jack for the input, you may use the XLR connector for the extension speaker or vice-versa.

TYPICAL LOUDSPEAKER IMPEDANCE CONFIGURATIONS

Individual speaker or speaker cabinet wiring examples.

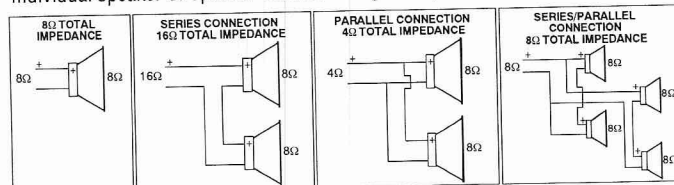

WARRANTY

CARVIN loudspeakers are covered by a ONE year limited warranty. Warranty coverage is limited to original manufacturing defects only. **WARRANTY DOES NOT COVER:** 1) Opened or burned voice coils. 2) Torn cones caused by improper packing or abuse. 3) Damage from rain, moisture, etc.


WARRANTY REPAIRS

To help reduce shipping costs, defective drivers can be removed from the enclosure. Return pre-paid by UPS. Include your address and detailed description of the problem. Your driver will be returned COD for the cost of shipping and reconditioning if the problem is not covered under warranty.

EXTENDED WARRANTY

Before your warranty expires, you may purchase an EXTENDED WARRANTY. Call 800-854-2235 for details.

722 FREQUENCY RESPONSE

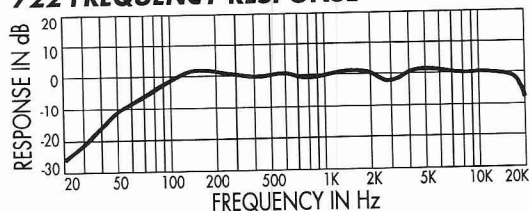

MODEL 722 SPEAKER SYSTEM SPECS:

Frequency Response:	78 Hz to 16 kHz ±3 dB
Useable Low Frequency	
Bandwidth:	50 Hz (-10 dB)
Power Handling:	200 watts Continuous Program Power
Recommended Amp:	50 to 300 watts
Sensitivity:	99 dB SPL
Coverage Angles:	90° Horizontal, 45° Vertical
Nominal Impedance:	8Ω
Horn Driver Protection:	Yes
Input Connectors:	One XLR & One 1/4" Phone Connector
Output Connectors:	One XLR & One 1/4" Phone Connector
Woofer Enclosure Type:	Closed Box
Enclosure Covering:	Duratuff™
Dimensions:	16.5"W x 12"D x 21.75"H
Warranty:	One Year, Extended Warranty available
Options:	Cables: PH50 or XP50, Vinyl Cover: CVS722

CARVIN

toll free: (800)854-2235

722