

TBA FIREFLYTM

PASSIVE FIRE PROTECTION

TBA Textiles Pty Ltd

ABN: 44 084 489 529

Issue Date: 07/02/2022

2

PHONE: (07) 5411 4209

OR (02) 8004 3333 (Option 2)

WEBSITE: tbafirefly.com.au

EMAIL: sales@tbafirefly.com.au

MATERIAL DESCRIPTION

TBA Firefly Plus 60 Cavity Fire Barrier is a flexible and lightweight fabric with an inner core of insulating fire protection.

Accoustic performance = 46dB room to room.

Also available with a fire rated silicone coating - Product Code FLYPLUS60RS

CERTIFICATION

AS1530.1 Non-Combustibility

CSIRO Report No: FNC11220

AS1530.3 Simultaneous Determination

of Ignitability, Flame Propagation,

Heat Release and Smoke Release

AWTA Report No: 20-002568

Tested and assessed in accordance with:

AS1530.4-2005 and AS4072.1-2005

Exova Warringtonfire Report No: 22766

DIMENSIONS

ROLL

6m x 1.3m = 7.8m²

10 mm Thick 2.2kg per m²

FRL 30/30/30
OR FRL -/60/30

APPLICATIONS


This easy to install flexible fire barrier is used as a fire engineered solution to continue compartment walls up into the roof void, maintaining both the integrity and insulation of the compartmentation between dwellings, lift shafts and stairwells, ideal for but not limited to strata units. TBA Firefly Plus 60 can also be used to provide inside out / outside in fire protection to boundary walls on both steel and timber framed buildings. The flexibility and fire rating level makes this product perfect for bespoke applications.

TBA FIREFLYTM

PLUS 60



Bespoke Application Fire Protection
Serpentine Sackler Gallery UK

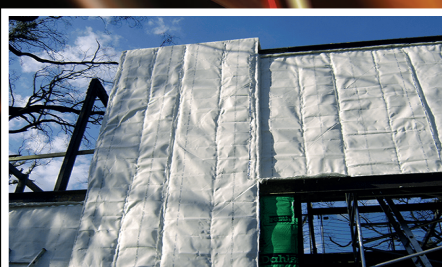

Calligee II Victoria



SES Building 2012 NSW