

PHONE: (07) 5411 4209
OR (02) 8004 3333 (Option 2)

WEBSITE: tbafirefly.com.au
EMAIL: sales@tbafirefly.com.au

MATERIAL DESCRIPTION

TBA Firefly™ Titan Cavity Fire Barrier is a flexible and lightweight fabric with an inner core of insulating Fire Protection.
Acoustic Performance = 49dB room to room.

CERTIFICATION

AS1530.1 Non-Combustibility
CSIRO Report No: FNC11220

AS1530.3 Simultaneous Determination
of Ignitability, Flame Propagation,
Heat Release and Smoke Release
AWTA Report No: 20-002569

Tested and assessed in accordance with:
AS1530.4-2005 and AS4072.1-2005
Exova Warringtonfire Report No: 22766

DIMENSIONS

ROLL
6m x 1.3m = 7.8m²
15 mm Thick 3.9kg per m²

FRL 60/60/60
OR FRL -/120/60


APPLICATIONS

This easy to install flexible fire barrier is used as a DTS solution to provide a seal of up to 6.3m high x infinite length, which extends from the head of a compartment wall/sub division wall to the underside of the roof lining. Can also be used to cap off lift shafts and stair wells, along with service risers for horizontal applications. Flexibility and fire rating level makes this product perfect for bespoke applications.

TBA FIREFLY™
TITAN



Strata Unit Subdivision NSW

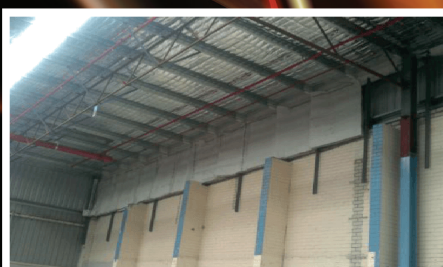

Titan Commercial Installation
Perth WA



Titan Vertical Seam