

## Features


-  RGB+CCT  
16 Millions of colors to choose
-  Color temperature  
2700~6500K
-  Dimmable  
Saturation control
-  2.4G  
2.4G RF wireless transmission technology
-  Remote control  
Control distance 30m
-  Smart phone APP control  
(2.4GHz gateway is needed)
-  Support third party voice control  
(2.4GHz gateway is needed)
-  IP66  
Waterproof and dustproof grade IP66
-  Signal transmitting &  
Modes synchronization
-  Beam angle 25°  
Illumination distance more than 10m

**6W RGB+CCT LED Garden Light (DC24V)**


Model No.: FUTC08

## Parameters

Model No.: FUTC08	CRI: >80
Input: DC24V	Beam Angle: 25°
Power: 6W	Illumination Distance: >10m
Working Temp.: -20~45°C	IP Rate: IP66
Color Temp.: 2700K~6500K	RF: 2.4GHz
Luminous Flux: 550LM	Transmitting Power: 6dBm
Light Efficiency: 90LM/W	Control Distance: 30m
Lifespan: 50000 hours	


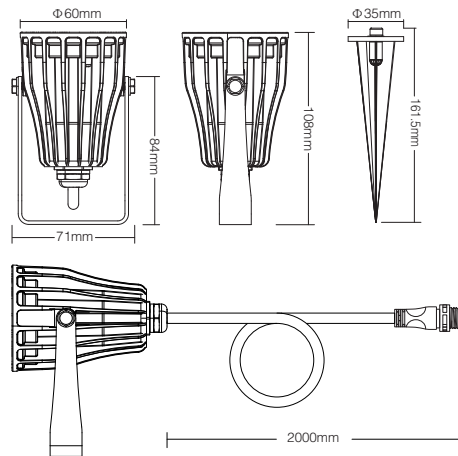


## Connection Diagram

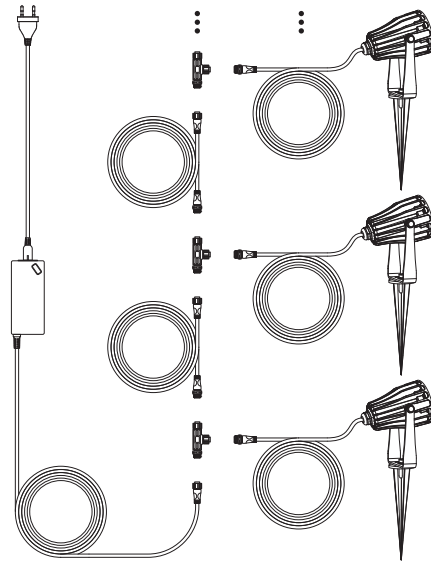

## Link/Unlink

Compatible with these remote controls  
(Purchased separately)

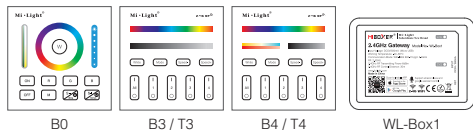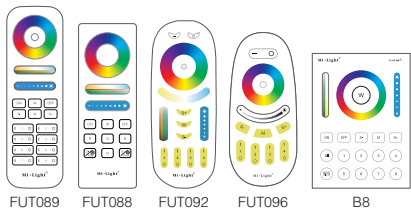


**NOTE:**  
Lighting can be working after linking with remote;  
for more details, pls read the remote instruction.

## Signal transmitting

One garden light can transmit the signals from the remote control to another garden light within 30m, as long as there is a garden light within 30m, the remote control distance can be limitless.

## Modes synchronization

Different garden light can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

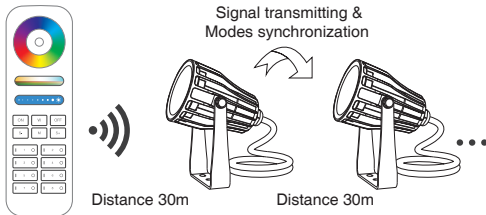

## Dynamic Mode Sheet




Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

## Attention

1. When install the lighting fixtures, pls switch off the power to make sure the safty.
2. Please check whether the input voltage supply is in accordance with the lighting fixtures.
3. Non-professional user cannot dismantle the lighting fixtures directly, otherwise it may damage the lighting fixtures.
4. Please do not use lighting fixtures around the mental area and high magnetic field, otherwise, it will badly affect the control distance.

5. Users must be correct, strict and solid to install the lighting fixtures; do not use the lighting fixtures on strenuous vibration area.
6. The lighting fixtures will be heating on working, pls do not cover the lighting housing.

## Packing list

Name			
Quantity	1 PC	1 PC	1 PC



www.futlight.com  
Made in China



Signal transmitting & Modes synchronization