

Roof and wall shed insulation

For residential homes or commercial sheds



Trade Select™ ThermalLiner™ is an Extra Heavy Duty three-in-one reflective insulation, thermal break and Class 2 Vapour Barrier. Trade Select™ ThermalLiner™ is suitable for use in roof, wall and floor applications. Designed to manage heat gain and heat loss, Trade Select™ ThermalLiner™ offers superior thermal performance to conventional insulation, and reduces thermal bridging and conductivity between building elements.


ThermalLiner™ is ideal for use in residential homes and commercial sheds.

- > Extra Heavy Duty
- > Flexible R0.1 reflective foam insulation liner
- > Low glare
- > High performance thermal insulation
- > Acoustic dampener
- > Low Flammability, suitable for all BALs in bushfire-prone areas

Construction

Trade Select™ ThermalLiner™ consists of a 4 mm core of chemically cross-linked, closed-cell high-density XPE foam laminated with strong polymer weave and aluminium foil with reflectivity of 95% reflectivity and emissivity of 0.05 to one side and 97% and emissivity of 0.03 to the other.

Ametalin utilises Advanced Laminating Technology; the polymer adhesive remains tacky indefinitely and provides superior resistance to heat, fire and delamination.

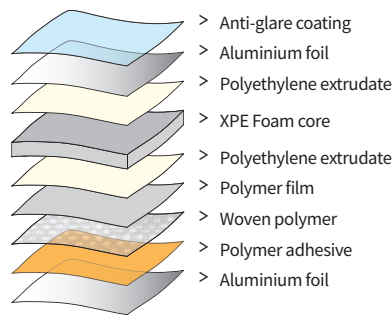

Declared Total System R-Values

Shed Roof

5° pitched with no ceiling

Winter **R_t 0.82**

Summer **R_t 1.86**

Shed Wall

No lining

Winter **R_t 0.95**

Summer **R_t 0.91**

ThermalLiner has a material R-value of R0.1. When it is incorporated into typical construction systems, the following thermal performance can be achieved:

R-values apply to typical conditions for mainland Australian capital cities and have been calculated by an independent consulting engineer, in accordance with AS/NZS 4859.1:2018. For detailed design of building systems readers are advised to seek advice from a qualified engineer, based on actual site conditions.

The contributions of this product to the total system R-value depends on installation and environmental conditions.

Material Properties and Classifications

ThermalLiner™ classifications in accordance with AS/NZS 4200.1:2017 and AS/NZS 4859.1:2018

| Criteria | Reference | Result | Requirement |
|---------------------------------------|--------------------|---|------------------------|
| Flammability Index | AS 1530.2-1993 | Low ≤ 5 | High (> 5) / Low (≤ 5) |
| Material Thermal Resistance | ASTM C518 | 0.11 m ² ·K/W (R _M 0.1) | Value |
| Tensile Strength Machine Direction | AS 1301.448s-91 | 15.9 kN/m | Min 9.5 kN/m |
| Tensile Strength Lateral Direction | AS 1301.448s-91 | 14.6 kN/m | Min 6.0 kN/m |
| Edge Tear Machine Direction | TAPPI T 470 om-89 | 666 N | Min 65 N |
| Edge Tear Lateral Direction | TAPPI T 470 om-89 | 606 N | Min 65 N |
| Vapour Control | ASTM E96 | Class 1 Vapour Barrier | Class 1 to 4 |
| Vapour Permeance | ASTM E96 | 0.001 µg/N.s | Value |
| Water Control | AS/NZS 4201.4:1994 | Water Barrier | Classification |
| Air Control | AS/NZS 4200.1:2017 | Air Barrier | Classification |
| Resistance to Dry Delamination | AS/NZS 4201.1:1994 | Pass | Pass |
| Resistance to Wet Delamination | AS/NZS 4201.2:1994 | Pass | Pass |
| Shrinkage (Repeated wetting & drying) | AS/NZS 4201.3:1994 | 0.0% | < 0.5% |
| Electrical Conductivity | AS/NZS 4200.1:2017 | Electrically Conductive | Classification |
| Emittance Value | AS/NZS 4201.5:1994 | Anti-glare side: 0.05, Bright side: 0.03 | Value |
| Emittance Classification | AS/NZS 4200.1:2017 | IR Reflective, IR Reflective | Classification |
| Emittance Category | AS/NZS 4200.1:2017 | RR | Category |

NCC Compliant

Trade Select™ ThermalLiner™ complies with AS/NZS 4859.1:2018 and AS/NZS 4200.1:2017, and therefore meets all of the requirements of the *National Construction Code of Australia* for insulation, pliable building membranes and sarking-type materials.

Fire Performance

Flammability Index

Low (≤5)

Tested in accordance with AS 1530.2-1993 *Methods for fire tests on building materials, components and structures Part 2: Test for flammability of materials*.

Bushfire Attack Levels

Complies with AS 3959-2018 *Construction of buildings in bushfire-prone areas* for use in all BALs.

Seek independent advice regarding the selection of sarking prior to installation in the BAL design.

Dimensions

1500 mm x 20 m (30 m²)

Nominal thickness: 4 mm

Specification Notes

When specifying, state the following:

Product Name: Trade Select™ ThermalLiner™

The insulation to be installed shall be Trade Select™ ThermalLiner™ double sided reflective, fibre-free thermo-reflective insulation, comprised of cross-linked, closed-cell core XPE foam with anti-glare foil facing on one side and plain foil facing on the other side. Material R-value is R0.11 and shall be installed in accordance with AS 4200.2:2017 *Pliable Building Membranes and Underlays, Part 2: Installation*.

Emittance Value: 0.05, 0.03

Emittance Classification: IR Reflective, IR Reflective

Material Value: R0.11

Vapour Control Classification: Class 1 Vapour Barrier, 0.001 µg/N.s

Water Control Classification: Water Barrier

Duty: Extra Heavy in accordance with AS/NZS 4200.1:2017

Complete details available on our website:

<https://www.tradeselect.co/>

Handling and Storage

Store this product under cover out of direct sunlight, in a clean dry place in the pack provided.

Durability may be affected by environmental factors, including chemical and airborne pollutants, if used in industrial or farm buildings.

Australian designed for Australian conditions. Manufactured by: Ametalin 9-11 Playford Crescent, Salisbury North S 5108 T: +61 8 8285 6955 F: +61 8 8285 5911 E: info@ametalin.com

© 2022 Ametalin All Rights Reserved. Ametalin is a division of Amalgamated Metal Industries Pty. Ltd. Product information in this publication and otherwise supplied to users is based on our general experience and is given in good faith, but due to factors outside our knowledge and control which may affect the use of products, no warranty is given or implied with respect to this information or the product itself regarding the suitability of the product for any particular purpose. The usage of this and other building membranes will affect moisture migration in the building element. The purchaser should independently determine the suitability of the product for the intended purpose. For large projects with complex air-conditioning and condensation issues, designers may wish to contact our technical department. Product colour may vary from batch to batch. Amalgamated Metal Industries Pty. Ltd. reserves the right to amend product specifications without prior notice. Information provided is considered to be true and correct at the time of publication. Complete details including installation instructions are available on our website: www.tradeselect.co TPM-22237-1

| | | |
|-----------------|--|--|
| Distributed by: | NSW / ACT / VIC / TAS | SA / WA / NT / QLD |
| | RM INDUSTRIES Phone: 03 9786 8449 Email: info@rmindustries.com.au www.rmindustries.com.au | REFLEX INSULATION Phone: 1300 720 185 Email: info@reflexinsulation.com.au www.reflexinsulation.com.au |

