


Discover elegance in every step with our BOSTON

Immerse yourself in a world of sophistication with our BOSTON., meticulously crafted color body porcelain tiles. Available in three soft and elegant stone effect hues, these tiles redefine your space, transforming it into a haven of timeless beauty. Elevate your surroundings with the allure of our Boston and experience luxury.





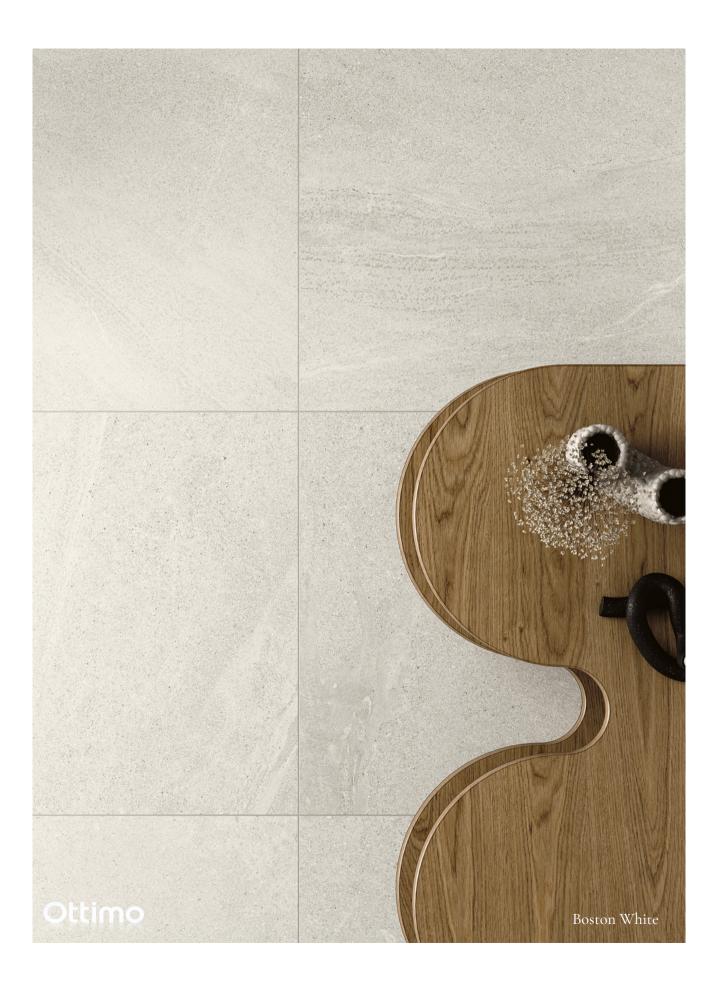

BOSTON Floor & Wall Tile



BST01 - Boston White



BST02 - Boston Ivory



BST03 - Boston Gray



BOSTON Color Body Porcelain 12x24, 24x48

Made in USA



SPECIFICATIONS

Color	Item	Exact Size	Thickness	Finish	Edge
White	BST01-2 BST01JR	60x120 cm 30x60 cm			
Ivory	BST02-2 BST02JR	60x120 cm 30x60 cm	8.5 mm	Matte	Rectified
Gray	BST03-2 BST03JR	60x120 cm 30x60 cm			

APPLICATIONS


	Floors	Walls	Backsplash	Pools/Spas
Residential	٠	٠	•	•
Commercial	٠	٠	٠	•

TEST RESULTS

DCOF	PEI	Water	Breaking	Scratch	Chemical	Frost
Rating	Rating	Absorption	Strength	Resistance	Resistant	Resistant
≥0.42	3	≤0.5%	≥250 lbs	N/A	Unaffected	Resistant

PACKAGING

Size (Nominal)	Pcs/Box	Sqft/Box	Box/Pallet	Sqft/Pallet	Lbs/Box	Lbs/Pallet
12x24	8	15.5	32	558	61	2236
24x48	2	15.5	36	496	61.4	1932.48

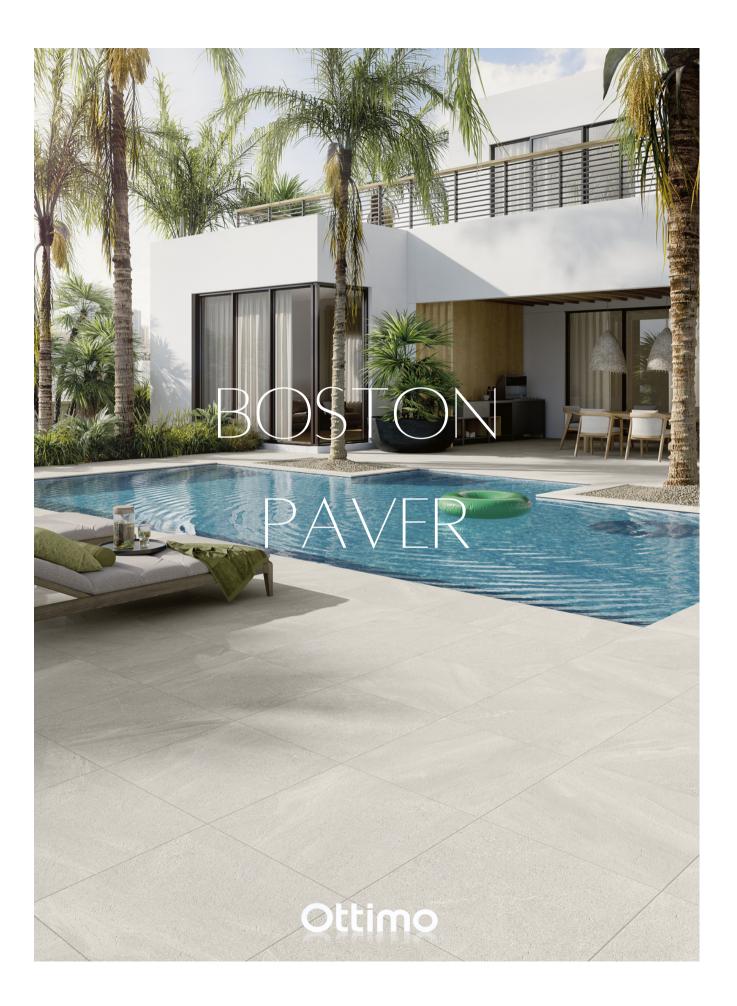





BOSTON Outtdoor Paver





BST01PV - Boston White





BST02PV - Boston Ivory



BST03PV - Boston Gray







BOSTON PAVER Color Body Porcelain 16x32



SPECIFICATIONS

Collection	Color	Item	Exact Size	Thickness	Finish	Edge
	White	BST01PV				
	Ivory	BST02PV	40x80 cm	20 mm	Matte	Pressed
	Gray	BST03PV				

TEST RESULTS

	Established Limits	Performances	Norms	
Water absorption	≤ 0.5%	~0,1%	ASTM C 373	
Breaking strength (1)	≥ 250 lbf.	~30001bf.	ASTM C 648	
Frost resistance	Resistant	Resistant	ASTM C 1026	
Resistance to thermal shock	Resistant	Resistant	ASTM C 484	
		Classe1		
		16"x32" : > 4kN	-	
Averagee breaking load for raised floor installation (2)		24"x24" : > 4kN	EN 12825*	
		Classe2		
		16"x48" : > 6kN		
M		16"x32" : U4	EN 1339-F*	
Mechanical strength (3)		24"x24" : U7		
Slip resistance (DCOF)	≥ 0.42	≥0.60	ANSIA326.3: 2017 release 2019. (DCOF)	
Chemical resistance	As reported	Class: A	ASTM C 650	
Stain resistance	As reported	Class: A	ASTM C 1378	
*Tests carried out on a different type f	rom that for which the standard is issu	ed		
1) It states the resistance of a sample p	piece, leaning on three spots, to a conce	ntrated load placed in the middle.		
2) It shows the resistance, on raised flo	oor laying as suggested by the catalogue	e, to a the concentrated load applied in t	he middle.	
3) It shows the breaking resistance thr	ough bending of the product in full siz	e. The load is applied through a horizon	tal cylinder placed in the middle.	

PACKAGING

Size	Pcs/box	Sqft/box	Box/pallet	Sqft/pallet	Lbs/box	Lbs/Pallet
16x32	2	6.89	24	165.36	64.66	1552