



PASSAGE

Ottimo
ceramiche

A collage of interior design elements. The top left shows a wall with a repeating geometric pattern in a light beige tone, with two potted plants in terracotta pots below it. The top right features a hanging wicker chair with green cushions and a patterned blanket, set against a dark red wall. The bottom left shows a dark grey wall with two green lanterns on the floor. The bottom right shows a light beige tiled floor.

Embark on a captivating journey guided by the natural allure, warmth, and timeless elegance of our PASSAGE collection.

Inspired by the enchanting world of limestones, our meticulous exploration and redefinition of the unique characteristics of this stone ensure that every space becomes a sanctuary of exclusivity and refinement. Discover the extraordinary beauty that unfolds with every step, as PASSAGE surfaces transform your surroundings into a symphony of sophistication.



Ottimo
ceramiche

Passage Ice



Ottimo
ceramiche

Passage Wind





Ottimo
ceramiche

Passage Rock

PASSAGE Floor & Wall Tile


12x24 | 24x24 Porcelain Matte



PSG010 - Passage Ice



PSG011 - Passage Wind

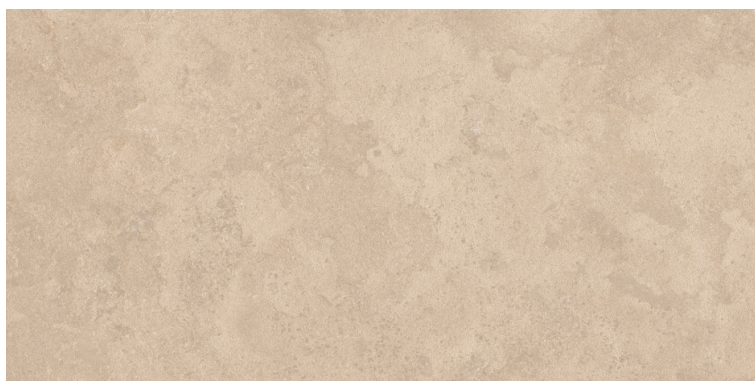

PSG012 - Passage Sun




PSG013 - Passage Rock

PASSAGE

Color Body Porcelain
12x24 | 24x24

Made in the USA



SPECIFICATIONS

Color	Item	Exact Size	Thickness	Finish	Edge
Ice (Ivory)	PSG010-2	11.69" x 23.46"	3/8"	Matte	Rectified
	PSG010-1	23.46" x 23.46"			
Wind (Grey)	PSG011-2	11.69" x 23.46"			
	PSG011-1	23.46" x 23.46"			
Sun (Beige)	PSG012-2	11.69" x 23.46"			
	PSG012-1	23.46" x 23.46"			
Rock (Taupe)	PSG013-2	11.69" x 23.46"			
	PSG013-1	23.46" x 23.46"			
Ice (Ivory)	PSG010PV-1	23.46" x 23.46" (Paver)	3/4"		
Wind (Grey)	PSG011PV-1	23.46" x 23.46" (Paver)			

TEST RESULTS

	Established Limits	Performances	Norms
Water absorption	≤ 0.5%	~0,1%	ASTM C 373
Breaking strength (1)	≥ 250 lbf.	~3000lbf.	ASTM C 648
Frost resistance	Resistant	Resistant	ASTM C 1026
Resistance to thermal shock	Resistant	Resistant	ASTM C 484
Average breaking load for raised floor installation (2)		Classe1	EN 12825*
		16"x32" : > 4kN	
		24"x24" : > 4kN	
		Classe2	
Mechanical strength (3)		16"x32" : U4	EN 1339-F*
		24"x24" : U7	
Slip resistance (DCOF)	≥ 0.42	≥0.60	ANSIA326.3: 2017 release 2019. (DCOF)
Chemical resistance	As reported	Class: A	ASTM C 650
Stain resistance	As reported	Class: A	ASTM C 1378

PACKAGING

Size	Pcs/box	Sqft/box	Box/pallet	Sqft/pallet	Lbs/box	Lbs/Pallet
12x24	7	13.56	40	542.40	61.72	2493.8
24x24	3	11.63	40	465.2	52.91	2141.4
24x24 (Paver)	2	7.75	30	232.5	52.91	1637.3