
12 Special Nozzles


Low cost effective device to aid in colour dispersion with minimum pressure drop. Disc is located in front portion of nozzle, directly behind nozzle tip or in rear of nozzle tip. Removes fish eyes and unplasticized particles. Also provides general

dispersion.

Dispersion Disk Filters



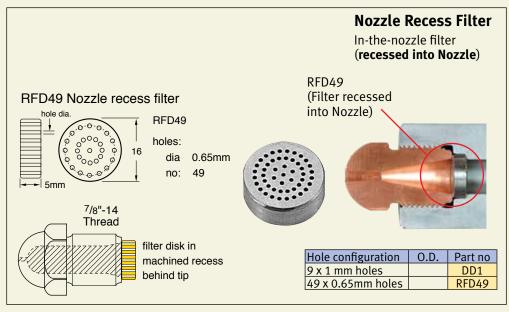

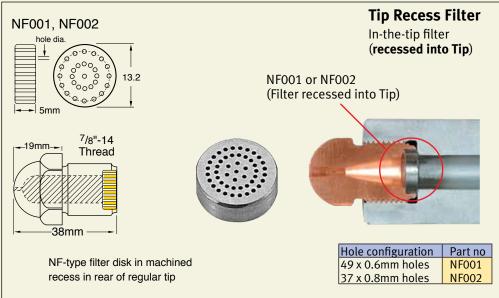

TO ORDER... Select the required length standard removable tip nozzle from listings in this catalogue. SImply add required dispersion disk and allow for machining charge.

Dispersion Disk Filter Flow characteristics

	Filter Type	Number of holes	dia. of ea. hole	Total area of holes	equiv. orifice	filter dia	Part no
	Nozzle recess	49	0.6mm	13.9mm ²	4.2mm	16	RFD49
	Tip	49	0.6mm	13.9mm ²	4.2mm	13	NF001
	recess	37	0.8mm	18.6mm ²	4.9mm	13	NF002







