


Loom 14 Flush

700FMLOM

1.0

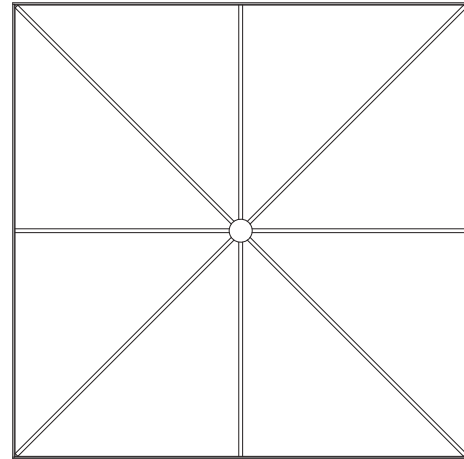

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is suitable for damp locations.

This product can be dimmed with a low voltage electronic dimmer.

This instruction shows a typical installation.


CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

Install the Fixture

IA

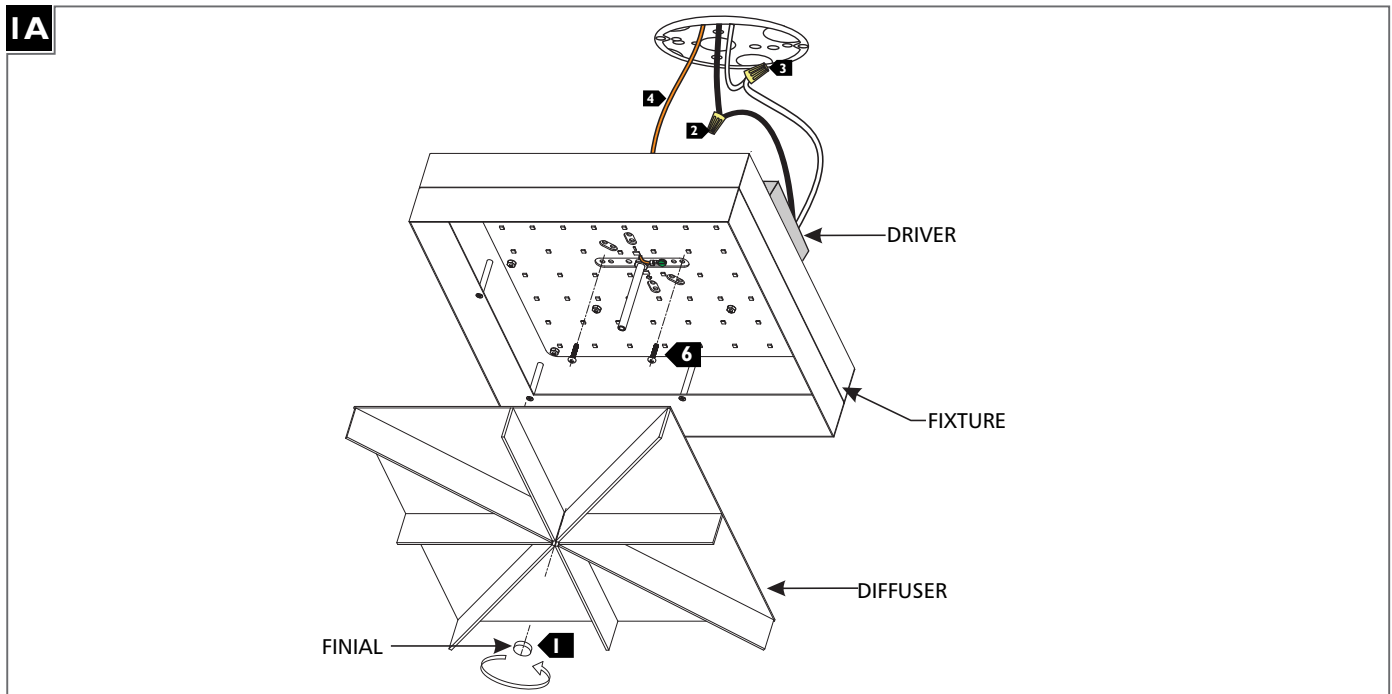

- 1** Remove the diffuser by unscrewing the finial located in the center of the fixture.
- 2** Connect the black driver wire to the hot power line wire with a wire nut.
- 3** Connect the white driver wire to the neutral power line wire with a wire nut.
- 4** Connect the fixture to suitable ground in accordance with local electrical codes.
- 5** Properly place the driver, wires and wire nut connections into the electrical box. (Optional: To assist with install, remove tape backing from driver and adhere to the electrical box or back of fixture housing.)
- 6** Install the fixture onto the electrical box with the two #8-32 screws provided.
- 7** Replace the diffuser onto the fixture. (Reversal of step 1.)



7400 Linder Ave, Skokie, IL 60077

847.410.4400

www.techlighting.com

© 2018 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company

SAVE THESE INSTRUCTIONS!