

Solid Nozzles

All solid nozzles are made from a special high strength chrome/vanadium/tungsten tool steel and are supplied in pre-heat-treated 'T' condition, or fully hardened and tempered in our heat-treatment ovens.

Shock resistant and tough, our nozzles will withstand high temperatures up to 800°F (430°C) for extended periods without undue fatigue.

Do not compare these top quality nozzles with nozzles which are made from "easy to machine" common tool steels.

Solid Nozzles available from £80

Material Specifications:

S1: Chrome vanadium tool steel through hardened used for through-hardened one-piece "solid" nozzles and removable tips.

EN19T: Standard material for removable tip nozzle bodies. Pre Heat-Treated


EN24: Through Hardened Steel for Tips and Nozzle bodies in more demanding applications.

D2: Through Hardened Tool Steel for solid one-piece nozzles in demanding applications

Copper nickel: Used for removable tips when a high degree of thermal conductivity is required, or if space limitations do not permit the use of a heater band.


- OEM or Custom design style
- Highest quality- we manufacture for many OEMs
- Inside surfaces are polished to a mirror finish for minimum hang-up and flow resistance
- Made in our workshop- fastest delivery
- Made from top quality tool steel for longest possible life
- In-house heat treatment for fast turn-around
- Gas Injection and water cooled options
- Any shape and size available to your order

Internal design:

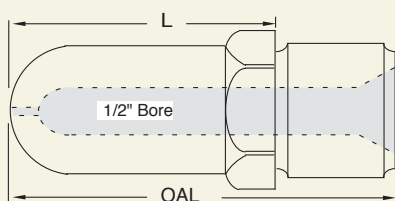


GENERAL PURPOSE

Standard free flow internal design, General Purpose, provides minimum flow resistance and back pressure buildup. 1/2" standard diameter flow path unless otherwise stated.

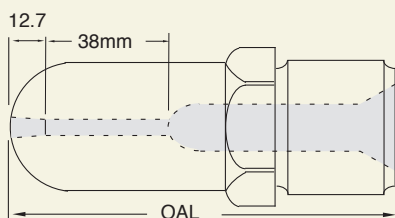

NYLON REVERSE TAPER


For use with polyamides, acrylics, and similar expansive and heat sensitive materials. Material flows 1 1/2" through 1/8" diameter restricted throat into 1" long reverse taper. Sprue breaks inside nozzle providing expansion area and reducing drool.

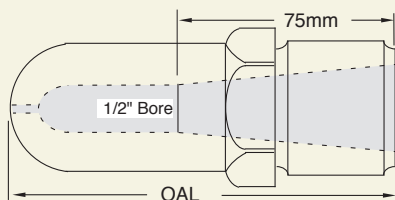

FULL TAPER - ABS

For use with ABS, PVC and other viscous hard-flow materials. Reduces frictional heat and areas of hangup. Recommend large orifices for minimum flow resistance. Taper 3" longitudinal distance from rear opening to 1/2" internal bore.

When ordering, please state radius and orifice. To complete part number, add Radius and Orifice Suffixes as shown below.



Radius sizes:	35mm (8)	3/4" (19mm) (7)	15mm (6)	1/2" Radius (12.7mm) (5)				
Orifice (mm)	1.5	2.5	3	4	5	6	8	9.5
Part no suffix:	I	J	K	L	M	N	O	P

note: 1.5 & 2.5mm orifice only available in GP tip

PRICE PROMISE
We will not be beaten on price for similar product with the same quality and specification

01536 206653
nickerson europe
www.nickerson europe.co.uk
sales@nickerson europe.co.uk

01536 403886
PMS
Plastic Moulding Supplies
www.pmseurope.com
sales@pmseurope.com

CALL TODAY FOR BEST PRICES