# **TEAMGEE**

# Operation Manual—TeamGee Electric Skateboards

(Please read this Manual before using the skateboard)

\_

# **A** Safety Warning

This Manual is designed for TeamGee H20 mini Electric products only.

We provide important safety warnings and precautions in this Manual. Please keep them in mind, to ensure safety and be sure to read this Manual before use.

- 1. Skateboard has potential risks like other sports, and it might cause injury. When riding the skateboard, the user might tumble due to loss of balance and get injured or even die.
- 2. Be sure to wear protective gear before use such as: helmet, kneepads, elbow pads, and hand guards.
- 3. When you use the electric skateboard for the first time, ride it on a safe open ground and practice basic movements such as standing on the board, accelerating, braking and riding on slow mode to avoid getting injured in a collision.
- 4. Ride the electric skateboard on flat roads with grip in the open space. Do not ride it on potholes/sand/gravel/muddy/uneven or slanted roads. Do not ride on slippery roads, such as snowy/icy and wet roads to prevent wobbling in use. It is also very dangerous to ride the skateboard on a slope, particularly when riding downhill. Always ride the skateboard within your ability.
- 5. Do not touch the motors with bare hands immediately after riding the skateboard; otherwise, you may get burnt and/ or have other collateral damage.
- 6. Do not ride the skateboard at night or in a low visible environment.
- 7. Beginner-level skateboarders should not try to do fancy skateboarding tricks on the electric skateboard, such as an ol lie, emergency brake, or carving to avoid getting injured or damaging the skateboard.
- 8. Minors should be accompanied by parents when riding the electric skateboard and should not use a mobile phone or wear headphones when riding.
- 9. Please check your shoelaces before riding the skateboard and avoid contact between your shoelaces and the wheel driving system to avoid danger.
- 10. This electric skateboard has the function of power regeneration. Due to the power regeneration, the skateboard battery will be overcharged when riding downhill and using the brake when the battery is full. This will affect the battery life. If the voltage is higher than the safe value, the remote control will vibrate to remind the user, then the user needs to stop riding downhill and find a flat ground or ride uphill to use the battery and it will be safe to ride downhill again afterward.
- 11. Pay attention to the standing posture of your feet when riding and do not step on the front and rear wheel of the skateboard to avoid danger when riding.


# **Disclaimer**

- ♦ When the motor is moving, do not touch it with any part of your body to avoid getting abrasions and other accidental injuries.
- ◆ Do not dismantle the equipment without permission; otherwise, if the skateboard is damaged due to inappropriate dismantling, it will not be covered within the scope of warranty.
- ◆ The waterproofing grade of the motor and remote control is IP54 (splash-proof). It is advised not to ride it on rainy days or in puddles; if the skateboard is immersed in water and damaged, it will not be covered within the scope of warranty.
- ◆ Please abide by local traffic laws when riding the electric skateboard; ride it on the allowed roads and grounds and do not ride it side-by-side with other motor vehicles to avoid danger.
- ◆ Minors should wear protective gear and be accompanied by parents or adults when riding and beginners should wear safety gear and ride with caution.
- ◆ Children under the age of 14, disabled people, pregnant women, people over the age of 50, mentally disabled people, and people with a disability to move normally may not use the electric skateboard.
- ◆ Improper operation may lead to failure of normal use of the skateboard and even damage related equipment. Therefore, it is strongly advised to read this Manual carefully before using the skateboard and follow the specified operating procedures strictly. We will bear no liability arising from use of this product, including without limiting the liability of compensation for incidental losses or indirect losses; meanwhile, we will bear no liability arising from unauthorized modification of the product. We may change the product design, appearance, performance, outer package and operating requirements without prior notice.
- ◆ Skateboarding is an inherently dangerous sport and safety equipment should be used at all times, especially a helmet. Low speed accidents can still cause serious injury and/or death.
- ◆ Don't be too cool for safety equipment and risk your life. Even the pros use a helmet and pads. Always watch out for cars while riding on surface roads open to traffic and follow all pedestrian rules. Always skate within your abilities and use common sense while riding. Check your equipment to make sure everything is in proper working condition prior to skating.
- ◆ TeamGee accepts no liability should you injure yourself using any products sold under our brand name or sub-brand names.

# **Contents**

1. Introduction to the Skateboard	
Briefly introduce the composition of each part on the electric skateboard.	
2、Remote control6-9	
Use of the remote control to understand the user interface, specific operations and the use	
of pairing mode and data mode.	
3. Technical Parameters of the Skateboard and Packaging List9-1	2
4. Quick Start	13
Quickly learn about the electric skateboard and prepare for the first riding.	
5. Instructions for Safe Use of Electric Skateboard and Battery	15
6、Riding Tips15-	17
Learn how to identify dangerous situations and do quick response during riding.	
7. Precautions for Safe Use of the Skateboard	18
Learn safe use of the skateboard and troubleshooting.	
8 Product Warranty	19-21
Know the after-sales warranty regulations of product.	
9、Warranty Card	21


Introduction (A brief overview of the various components on this electric skateboard.)

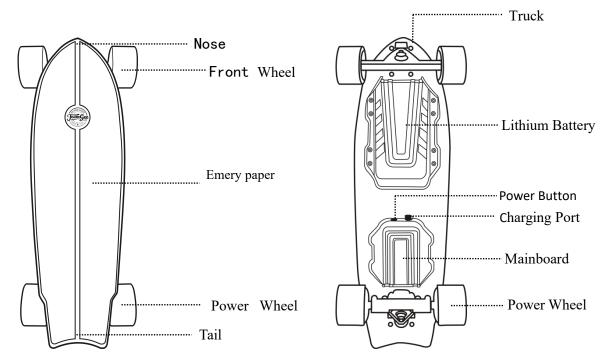

# Truck adjustment of skateboard

The PU bushing is an indispensable and important part of a skateboard. Users can adjust its elasticity according to their weight and riding habits, so as to better experience the fun of riding.


As shown in the figure: adjusting the tightness of the nut can change the steering angle, stability and steering sensitivity of the skateboard. (Remember that the nut cannot be loosened too much to prevent the nut from shaking and falling during riding, which could be dangerous)

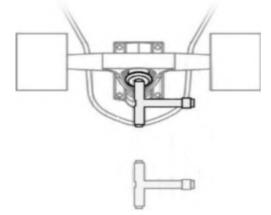

Remote control (Use of the remote control to understand the user interface, specific operations, and the use of pairing mode and data mode.)

# 1. Remote control technical parameters Specification

Model	Remote for Skateboard H20 mini
Battery Voltage/Capacity	3.7V/400MAH
Charging Port	TYPE-C
Charging Time	1H
<b>Communication Mode</b>	2.4G
Remote Control Distance	20m or more ( open space))
Weight	55g
Applicable Electronic Speed Controller	ESC-Skateboard-HW9005/HW9006

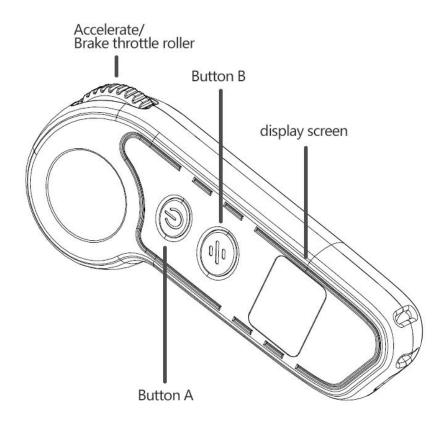

# Instruction for product features and operation

#### 1. Power on

In the off state, press and hold the "button A" on the remote control for 1 second to turn on, the remote control shortly vibrates once, thereby entering the connection mode, and the OLED screen displays connected or the disconnected according to its status. Then press the power button of the skateboard for about 0.2 seconds to turn on and enter the connected mode.

Note: When the skateboard and remote control are connected, both of their indicator lights are always on.

#### 2. Shut down

Manual shutdown: under power-on state, press and hold "Button A" for 2 seconds to shut down in seconds after a short vibration. (when the remote control and skateboard are connected and the skateboard is at a speed, remote control can't be shut down.)

Note: If the remote control still power on and connected while the skateboard shut down, the remote control will display unconnected and with a short vibration reminder. If the remote control shut down first while connected to the skateboard, the skateboard will brake automatically, and the skateboard will automatically shut down without any operations for 5 minutes.

Automatic shutdown: When the skateboard in standby mode and without any operations for 5 minutes, both of the remote control and the skateboard will automatically shut down.

# 3. Remote Control Code (The code program of each board and the supporting remote control has completed when the

### product leaves the factory)

When both of the remote control and the skateboard are off, long press the power button of the board for 5 seconds and release the button after the power indicator of the skateboard starts to flash, which is indicating it has entered into the pairing mode, and then long press the button "A" of the remote control for 5 seconds, the pairing icon will appear on the screen, indicates that it has entered into pairing mode too. A connected icon will display on the remote control's screen and with two short vibrations plus one long vibration appeared if the pairing has finished. When the pairing has done, the red indicator light of the skateboard will be steady on, and the user can start to ride.

Note: The remote control and the skateboard that never been paired before will enter the pairing mode automatically.

#### 4. Remote control power display:

The remote control has a five-level battery indicator. When the remote control battery power is only about 10% (enough for 30 minutes use), its 10% power displays and with double long vibrations; when its power is only about 5% (enough for 15 minutes use), its 5% battery power displays and with a long vibration; when the power is lower than the safe use voltage (3.4V), remote control and skateboard disconnected, then remote control will automatically shut down after a short vibration.

The skateboard has a five-level battery indicator. When the skateboard power is less than 25%, 25% skateboard power displays and with double long vibrations. When skateboard power is less than 10%, 10%

skateboard power displays and with a long vibration. When the voltage is lower than the safe use voltage, the power output is turned off, and the user should brake as soon as possible.

#### 5. Brake

Push the "throttle roller" forward to go ahead, and pull the "throttle roller" backward to brake.

When turning on the power, please make sure the throttle dial of the remote control at its natural state, otherwise, it may affect the user riding experience. If the throttle dial does not at its natural state from the beginning, the remote control will prompt a reminder on screen.

#### 6. Forward/backward switch

In the forward state, double-click "Button B", the remote controller shortly vibrates once (shortly vibration 100 ms, the same below) and the direction icon on display changes to "back arrow";

In the backward state, double-click "Button B", the remote controller shortly vibrate once and the direction icon on display changes to "forward arrow".

Note: This operation is only effective when the throttle stick is at the midpoint position (zero throttle) and the speed is less than 3km / h.

#### 7. Gear switch

Short press "Button B" once, the remote control switches to the next gear, the screen gear icon changes accordingly and with a short vibration of the remote control.

Note: This operation is only effective when the throttle dial is at its neutral state.

#### 8. Charge

After the remote control is powered on, the remote controller will shortly vibrate once when it start to charge, and the remote control screen will display the charging progress in real-time in the form of running lights;

Note: Operations on remote control can't be performed during the charging. The remote control will automatically shut down after a short vibration after unplugging the charging cable.

Charging: Cable connection charging

#### **Instruction for malfunction alarm**

#### 1.Battery low voltage alarm

① When the remote control battery power is only about 10% (enough for 30 minutes use), its 10% power displays and with double long vibrations; when its power is only about 5% (enough for 15 minutes use), its 5% battery power displays and with a long vibration; when the power is lower than the safe use voltage

(3.4V), remote control and skateboard disconnected, then remote control will automatically shut down after a short vibration.

When the skateboard power is less than 25%, 25% skateboard power displays and with double long vibrations. When skateboard power is less than 10%, 10% skateboard power displays and with a long vibration. When the voltage is lower than the safe use voltage, the power output is turned off, and the user should brake as soon as possible.

Note: When the remote control or the skateboard starts to be reminded for the second time, the user should stop using it and charge the related equipment to avoid damage to the lithium battery due to over discharge.

#### 2. Signal loss alarm

When the signal is suddenly lost, the remote control screen prompts disconnected and is accompanied by a short vibration. If the skateboard is accelerating, the acceleration will slow down first, and then it starts to automatically brake slowly; if there is no acceleration operation, the skateboard will slowly brake. After the signal lost, the remote control will start to search for the skateboard. When the skateboard and remote control reconnected successfully, the remote control will vibrate once and the gradual brake will disappear, then back to normal use.

#### 3. Motor wheels blocked alarm

When motor wheels are blocked or completely stuck, the remote control displays overheat icon on its screen and with intermittent vibrations, then the motor will stop working.

Note: The user should pay attention to the motor temperature. When the motor wheel is overheated, the user should stop using it and wait for the temperature to decrease before using it.

#### 4. Overheated alarm

When the temperature of the operating motor is higher than  $100~^{\circ}\text{C}$  or lower than  $0~^{\circ}\text{C}$ , the remote controller vibrates once and displays overheat, then the motor will stop working.

Note: The user should pay attention to the motor temperature. When the motor is overheated, the user should stop using it and wait for the temperature to decrease before the next use.

#### 5. Overcurrent alarm

When operating motor current exceeds its maximum allowed, the remote controller screen prompts overcurrent, and the motor will stop working.


Note: Turn off the skateboard and turn it on again, and use it when the current back to normal.

# **Technical Parameters of Skateboard (Subject to the Purchased Product)**

Product Parameter	Model	Double-drive 36V H20mini Skateboard	
	Board dimension (subject to the real product)	800MM*230MM*11MM	
	Wheel base	545MM	
	Total weight	7.5kg	
Product	Ground clearance of board surface	122MM	
Specificatio	Climbing Angle	10%-25%	
n	Board material and thickness	Board material:10-layer Canadian maple board board thickness: 11MM	
	Bridge material and dimension	50° 7 inches, high-strength aluminum – magnesium alloy	
	Abrasive paper	Air-permeable abrasion-proof emery paper	
	Shock absorber	High-elasticity SHR83A PU shock absorber	
	Min. load	20kg	
	Max. load	100kg	
	Target users	14-50 years old	
Product		Gear L: 10-20km/h	
Performanc		Gear M:: 20-30km/h	
e	Speed	Gear H: 30-38km/h	
		Gear H+: 30-38km/h	
	Driving mileage	(6 Ah battery)≥25-30km; (7.5Ah battery)≥35-38km;	
		(9.6Ah battery)≥45-48km	
Battery	Battery type	18650 lithium battery	
Parameters	Standard voltage	36v	
	Battery capacity	18650 10S3P 6Ah /7.5Ah/9.6 Ah 216Wh/270Wh/345.6Wh	

	Motor type	Double-drive brushless hub motor 80*54mm  • SHR83A PU rubber coating
Motor	Rated output power	450W*2
Parameters	Torque	9Nm
	Max. instantaneous power	1200W
	Rated voltage	36v
D. I. d.	Туре	High-elasticity PU wheel
Polyurethan e wheel	Specification	80*54mm SHR83A
e wneer	Bearing	HCH 608RS ABEC-7
	Input voltage	AC100-240v 50/60Hz
Chanan	Output voltage and current	DC42V 1.5A
Charger Parameters	Charging time	3-4hours
1 drameters	Mfr./Type	SHENZHEN FUYUANDIAN POWER CO LTD (E350715)/
		FY0634201500
Brake Method	Electronic brake	EBS
Protection	Intelligent DMC	Over-voltage / Under-voltage / Over-current / Short circuit / Overheat
Measures	Intelligent BMS	/ Auto sleep, wake-up
		Charge Temperature Range: 10-40°C
	Operating Temperature Range: 0-40°C	

# **Packaging List**

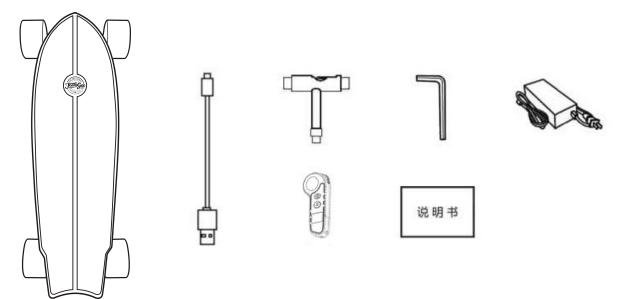

- ① TeamGee electric skateboard is a finished product and you can use it normally without needing to assemble.
- The above accessories are all provided at delivery of H3-T and the final delivery accessories shall be subject to the actual objects provided by the seller.

# Simply learn the electric skateboard and prepare for the first ride

#### 1. Power-on

Turn on the power switch of skateboard first (the switch is POWER button on the cover plate at the bottom of skateboard), and then turn on the power switch of the remote control.

#### 2. Inspect the speed mode

Inspect the speed modes of the remote control and it is advised that a beginner should put the speed mode on low-speed during the first use. Please select appropriate speed mode according to your familiarity with the skateboard.

#### 3. Stand on the board

Stand with your feet wider, stand on the deck and with the support of another person or the wall, try to stand on the deck steadily; before standing on the skateboard, pull the throttle on the remote control all the way down to lock the board, which will help you to stay stabilized on the skateboard; bend you knees slightly, as this will help you keep balance.

#### 4. Control the forward acceleration.

If it is your\_first time standing on the skateboard, pull the throttle of the remote control all the way down (braking status), then stand on the skateboard and you will be stable; then try to push the throttle upward to accelerate slowly; for beginners, please push the throttle to accelerate slowly, and if you push it too fast, you might lose balance and fall from the skateboard. When accelerating, lean forward, put the center of your body weight on the front foot and you will be safer.

#### 4. Turning

Take an example of the standing posture with the left foot in front of the right; it will be opposite if the user adopts the standing posture with the right foot in front of the left.

- (1) Keep your balance, and bend your knees slightly.
- ② Turn left, make the center of your body weight backward slightly, press your weight toward the heel, and you will find that you start to turn left.
  - ③ Turn right, make the center of your body weight forward slightly, press your weight toward the tiptoe, and you will find that you start to slide forward right.

#### 6.Decelerate and brake

If you spot an obstacle or danger ahead, act on it beforehand and pull the throttle downward slowly until you reach a full brake, do not slam the brake to avoid wobbles; in an emergency, keep calm to deal with it.

#### 7. Power-off

Turn off the power switch of the electric skateboard and remote control respectively. If the electric skateboard and remote control are not operated within 10 min, they will be shut down automatically. After the skateboard is used, store your remote control properly and do not let it get played with by children or kept by people who don't know how to use the skateboard to avoid triggering the remote control by mistake and causing danger.

### Charging

Learn how to charge the skateboard with the charger.



# **Instructions for Safe Use of Battery**

#### **Overview**


Like people, the skateboard also needs to rest and to be charged. Before charging the electric skateboard, be sure to check whether the voltage of the power grid of your country matches the charger, and carefully read the precautions in this chapter. More importantly, it is not allowed to leave the electric skateboard charged at home for a long time. Failing to charge the skateboard according to this Manual might cause fire and

explosions in serious cases.

- 1. Be sure to carefully read and observe the safety tips in this Manual before charging.
- 2. When you don't know how to operate, please read this Manual.
- 3. For safety, please pay attention during charging the electric skateboard and remote control. Unplug the charging cable after the skateboard is fully charged.
- 4. To protect the battery life, do not charge the skateboard immediately after use, instead, wait for half an hour and charge it when the temperature of the internal battery and the remote control drops.
- 5. Do not charge the electric skateboard and remote control with the charging equipment from other brands rather than the original charger; otherwise, it might cause fire and even explosions in serious cases.
- 6. Do not replace the original charging plug, which might be dangerous.
- 7. It is forbidden to charge in the process of use. Such operation will cause serious consequence, such as fire or explosions.
- 8. Please keep the electric skateboard far away from the liquids, inflammables, explosives and other hazardous substances during the charging. It is forbidden to cover its surface with any objects, and ensure it is well ventilated.


# **Guide for Charging of Skateboard**

Before charging, turn off the power switch of skateboard, reverse the skateboard, with its surface facing downward and lay it flat, connect the charging cable to the charging port of the skateboard. For charging of the skateboard, connect the power supply according to the sequence shown in the figure below. When the skateboard has been fully charged, the indicator light on the power adapter will turn green from red, which means charging is completed and the charger can be unplugged.

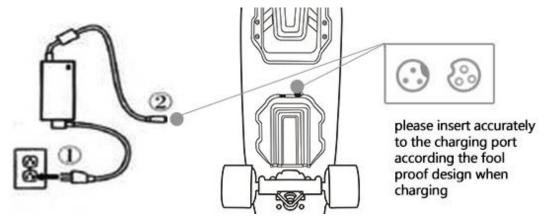

**Guide for Charging of Remote Control** 

Insert the charging cable Micro/USB connector of the remote control into the charging port of the remote control, connect the other end to a 5V power supply, and when the remote control has been fully charged, open remote control switch machine key, the power indicator of the remote control is full of electricity, which means the charging is completed and the charger can be unplugged.

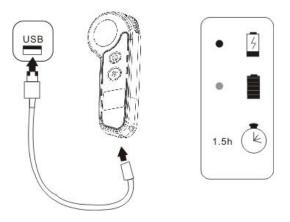

# Skills for Riding the Skateboard

We have always put user safety first and this is why we prepared this chapter to remind you to pay attention to the dangerous roads. For certain\_special roads, we will describe them as examples, and users are advised to keep off these roads to avoid danger.

Note: We recommend users not to ride the skateboard on (non-motorized vehicle lane, even driveway) roads. The urban traffic situation is very complex and dangerous, please be responsible for your safety and be concentrated during the ride.

# **Safe Riding**

\*Please wear protective gear before riding.

\*Please don't pass through the following traffic conditions or road conditions if you can avoid them.

#### **Speed bumps:**

This electric skateboard can go over speed bumps. When traveling over a speed bump or preparing to go over a speed bump, maintain a certain speed, keep balance, but do not try it as a beginner.

### **Bumpy road:**

When riding on such roads, the bumpy roads may make the wheel suspend in the air and lose the grip. So please maintain low speeds and keep ridings straight as much as possible.

#### Junction of sidewalk and lane

Usually there are steps and even gaps less than 3cm at the junction of roads. When passing through or getting ready to pass through it, maintain a certain speed and plan the riding route to make it form an angle of 45° with the junction.

#### Small pits on the roads

Be careful to avoid these "traps". If the pit is big, the wheel might get stuck. If your wheel gets stuck in the pit during riding, it will lead to very serious consequence and injury.

# Roads with striped crosswalks

Pedestrian crossings seem to be very safe, however, when the road is wet (the dew in the morning or after raining), the grip provided by the road is very limited. Therefore, when passing through these types of roads covered with paint, do not accelerate fiercely, and do not change direction violently.

# **Underground garage**

Similar to the pedestrian crossing, the underground garage may also be covered with one layer of paint. If there is water on these types of roads, the grip will be very limited. Therefore, when passing through, do not accelerate fiercely, and do not change direction violently.

# Cars parking by the roadside

Some careless or reckless motor vehicle drivers might not see the rearview mirror when starting, and they will pay no attention to approaching of your skateboard. In such case, slow down as much as possible, particularly at the junction, check whether the automotive front wheel is going to turn

# Roadside pedestrians

In crowded places, slow down as much as possible, and when the pedestrians are calling or surfing the Internet on their cell phone, they will be unaware of your skateboard getting close.

### Water-logged roads

Considering the potential hazard for electronic components, please avoid immersing the skateboard in water. In water-logged places, there might be a big pit, and the tire might get stuck and cause serious sequence and injury.

Prompt: The damage to the electric skateboard caused by immersion in water will not be within the scope of warranty.

#### Precautions for Safe Use of Skateboard

# **Battery:**

Forbid plugging conductive objects into the charging interface; otherwise, the internal electronic devices in the skateboard might be short circuited and damaged, and it might even be dangerous. Please use the electric skateboard at 10-30 °C as much as possible; otherwise, it will accelerate the aging of battery at high or low temperature, accelerate the attenuation of battery capacity, shorten the battery life, and reduce the driving millage.

In the case of failure with the battery, dispose of it by the authorized agent of electric skateboard, and forbid dismantling and adapting it without permission.

#### **Charging:**

The lithium battery has no memory function, and it can be charged whenever needed. To extend the battery life maximally, please fully charge the battery every time after riding. If you charge the skateboard battery only when it has been used up, the lithium battery will be over-discharged, and the battery life will sharply decline. Do not charge the over-discharged lithium battery (it cannot be charged)! There is a potential safety hazard with the over-discharged battery, so please scrap the battery.

If you don't ride the electric skateboard for a long time, put it in a cool and dry indoor place, fully charge the battery, maintain at least 80% battery level, and charge it at least once every two months.

# **Cleaning:**

Ensure the skateboard is powered off, unplug the charging cable, snap the dust cap off the charging interface, then wipe the shell or surface of the electric skateboard with a wet cloth, and don't allow water to flow into the charging interface or the shell of the electric parts, to avoid damaging the electric skateboard.


#### **Maintenance:**

Regularly inspect the bridge nuts and truck bolts at installation position of front and rear bridge component, and tighten them right away if they are loose.

If there is a "chatter" sound during riding, add a few drops of lubricating oil at the position of bridge PU and top PU in time to lighten the wear.

Please regularly check whether the left and right PU wheels of the skateboard and motor PU jacket are worn seriously, whether the bearing is worn and makes abnormal sounds and the skateboard slides smoothly. For seriously worn PU wheels, please have it replaced by the authorized agent or dealer's customer service staff. Regular use of high temperature lubricating oil in the motor PU groove can prolong the service life of the motor PU wheel and reduce the noise in driving process.

# Note: The following illustration shows how to replace PU wheels and maintenance

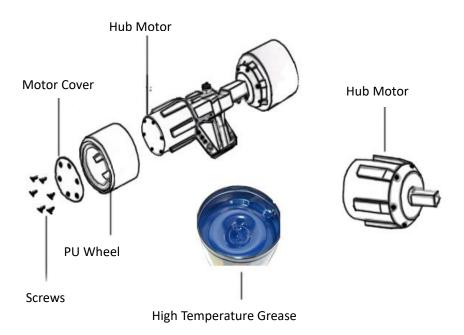

### **Transport:**

Note: The lithium battery is usually classified as a hazardous article according to shipping laws. If you need

to transport a lithium battery, please observe the requirements of local laws and regulation. To facilitate after-sales service, return and replacement of goods, please keep the original package of the whole skateboard properly; if the skateboard needs to be repaired, please transport it with the original package and pack it tightly, to avoid secondary damage in transit. Thanks for your support.

# **Product Warranty Regulation**

The purchase invoice will be taken as the warranty voucher, and the purchase date will be the starting date of warranty. If you have no effective warranty voucher, the warranty period will be six months from the production date of product.

Three-guarantee Scope of Electric Skateboard Parts and Time Limit		
Part Name	Term of Service	Service Content
	6 months	If the attenuation of battery capacity is
		over 50% (except for human factors),
Battery		and it could not be charged, the battery
		can be replaced within 6 months, unless
		it is damaged due to immersion in water.
		The motor hub has 1 year warranty;
Motor	1 year	unless it is damaged due to human factor
		and immersion in water.
	1 year	If the performance fault could not be
Electronic control (main board		recovered, they can be replaced, unless
and remote controller)		they are modified, immersed in water
		and damaged for human factors.
		If PU tire is damaged and cracks or the
PU tire	1 month	glue falls off due to quality problem, the
PO tire		tire can be replaced within one month,
		but normal wear is not covered within

	I	<del>                                     </del>
		the warranty.
		The natural fractures of the board can be
		replaced, but broken boards caused by
Board surface	1 month	human factors or by a collision with a
		vehicle will not be covered by the
		warranty.
		The bridge that unsolders and fractures
		naturally can be replaced. If the bridge
Bridge	6 months	appearance is damaged due to human
		collision or unauthorized refitting, the
		bridge will not be replaced.
Scope and Contents not within "	Three Guarantees"	
No.	Scope and Contents not Within "Three Guarantees"	
1	The fault which is caused due to the user's failure to use, maintain and	
	adjust according to this "Operation Manual".	
2	The damage which is caused by the user due to handling, human factor,	
	unauthorized fitting, dismantl	ling and repair, and due to the user's
	unauthorized dismantling, the original fault becomes worse, the product	
	is destroyed, and it is impossible to make a technical evaluation and	
	analysis.	
3	The damage caused by the user due to improper storage, overload, riding	
	over obstacles (riding down th	he steps exceeding the limit, falling from
	height, etc), or extreme sports	3.
4	The damage caused by repair of non-TEAMGEE designated	
	maintenance point; If the damage is caused by a natural disaster, the	
	warranty period expires, there	e is no invoice or purchase proof, and it is
	ř.	

	impossible to prove the product is within the warranty period, the
	invoice is inconsistent with the real object, or is altered, the product will
	not be within the warranty scope.
5	The appearance damage that is caused after use but doesn't affect the
	function is not within the scope of warranty.
6	The damage that is caused because the user rides the skateboard on rainy
	days and the skateboard is immersed in water for a long time.

# **Warranty Card**

Information I:	
Model	Repair Date
Machine Code	
Fault Phenomenon	
Analysis of Causes	
Signature of Analyst	SN
Information II:	
Model	Repair Date
Machine Code	
Fault Phenomenon	
Analysis of Causes	
Signature of Analyst	SN

On-line Service

Website:: www.teamgee.com