

PENDANT

GENERAL PRODUCT INFORMATION:



This product is suitable for indoor locations.

This product can be dimmed with a standard electronic dimmer.

This instruction shows a typical installation.


CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

2 PERSON INSTALL


SAVE THESE INSTRUCTIONS!



TECH LIGHTING

7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500 www.techlighting.com

Install the Fixture

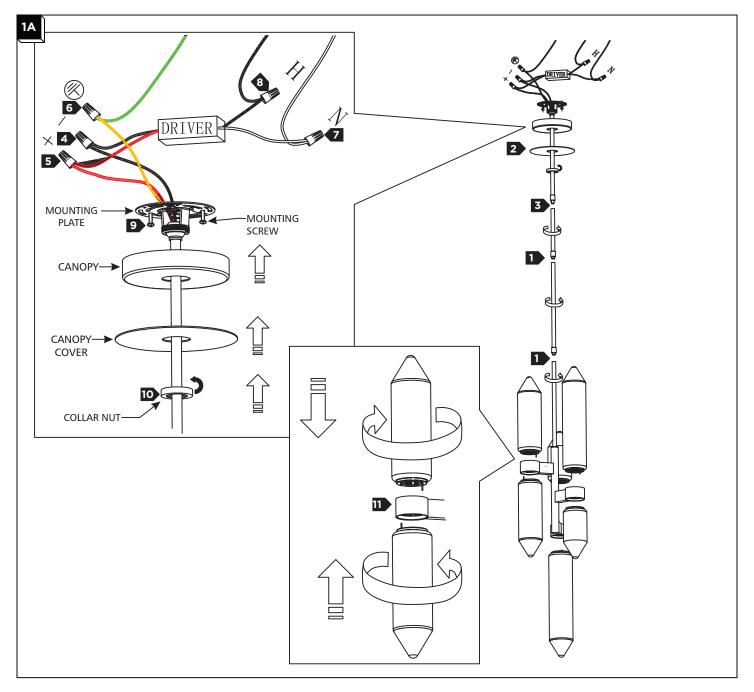

- Assemble the stems to the desired height, feed the fixture wires through the stem assembly and screw them onto the fixture. Do not install the top stem/mounting plate assembly at this time.
- 2 Install the collar nut, the canopy cover, and the canopy onto the stem assembly in that exact order.
- Feed the fixture wires through the top stem/mounting plate assembly and screw it onto the fixture assembly.
 - NOTE: an assistant will be needed to hold the fixture in place to complete the following steps..
- 4 Connect the negative (-) fixture wire to the negative (-) output driver wire with a wire nut.
- 5 Connect the positive (+) fixture wire to the positive (+) output driver wire with a wire nut.
- 6 Connect the fixture to a suitable ground in accordance with local electrical codes.
- Connect the white input driver wire to the neutral power line wire with a wire nut.
- 8 Connect the black input driver wire to the hot power line wire with a wire nut.
- 9 Secure the fixture assembly by securing the mounting plate to the electrical box with the provided mounting screws.
- Neatly place the driver, wire, and wire nut connections inside the electrical box, then slide the canopy and the canopy cover up to over the mounting bracket and secure in place with the collar nut.
- Install the shades by screwing it into the shade bases.