

# Chaumont Task Sconce

LXW1001 | 1.0

## GENERATION LIGHTING WALL

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

**SAVE THESE INSTRUCTIONS!**

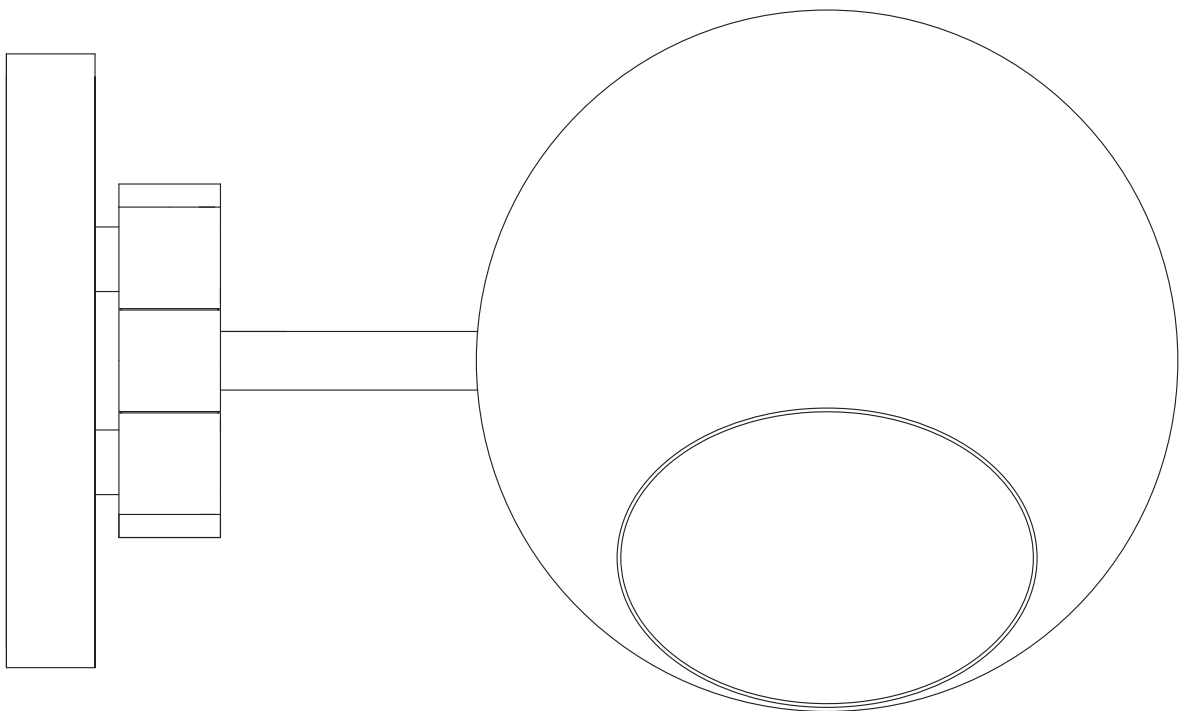


GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F 847.410.4500

[www.generationlighting.com](http://www.generationlighting.com)

## Install the Fixture

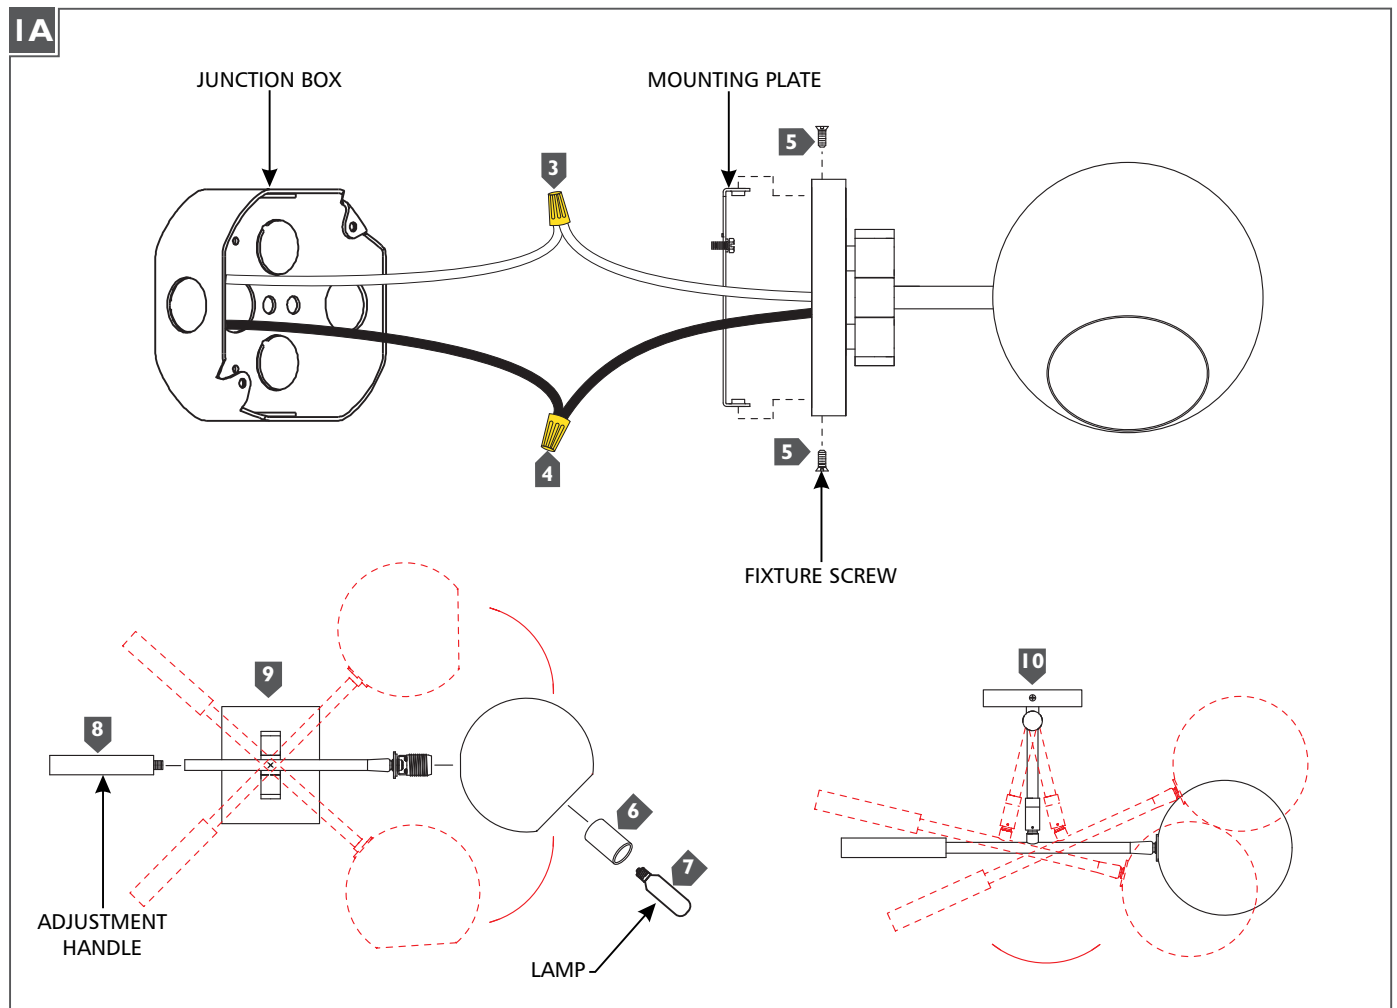

- 1** Secure the mounting plate to the junction box.
- 2** Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 3** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4** Connect the black fixture wire to the hot power line wire with a wire nut.
- 5** Properly place all wires and wire nut connections into the junction box/fixture base, mount the fixture onto the mounting plate, and secure it in place using the fixture screws.
- 6** Install the shade by placing it over the socket and secure it in place with the shade collar.
- 7** Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage Information.
- 8** Screw the adjustment handle to the fixture arm.
- 9** (Optional): Adjust the lamp by using the adjustment handle to tilt the fixture up or down.
- 10** (Optional): The fixture can be aimed slightly by moving it left and right.