


Emergency Battery Backup

Accessories

Backup Battery



Retrofit Cable

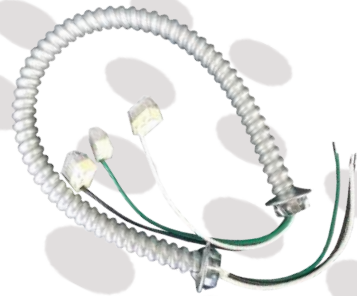

18W

Features

- Long life high temperature recyclable Ni-Cad battery.
- Includes test switch and charge indicator accessory kit.
- For use with switched or unswitched fixtures
- Meets or exceeds all National Electrical Code and Life Safety Code Emergency Lighting

Recommended Use

- Backup power for lighting products.

Advantage

- Never lose power to your lighting solutions!
- Certificate: RU, UL
- Warranty: 5 Years

Input Voltage

- 100-277Vac 50/60Hz



Emergency Battery Backup

Accessories

Emergency Battery Backup		
SKU #	150232	110022
MODEL #	EL-1248-XXU	
CONSUMPTION	12W (Max)	18W (Max)
INPUT POWER	4.8W (Max)	6W (Max)
OUTPUT VOLATGE	12V-48VDC	170VDC(Equivalent 120VAC)

Specifications


MAX AC DRIVER OUTPUT	5A
EMERGENCY OPERATION	≥90 minutes
OPERATING TEMP	32°F to 122°F
INPUT VOLTAGE	100-277 VAC, 50-60Hz
BATTERY	High Temp Nickel-Cadmium 40 Hour Recharge 7-10 Year Life Expectancy
UL CONDITIONS OF ACCEPTABILITY	Must be factory wired Battery temperature must not exceed 122°F

Warranty & Qualification

WARRANTY	UL LISTED	RU LISTED
5-Year Limited	Yes	Yes

Dimensions

Model	150232	110022
A	2.18"	2.72"
B	2.16"	2.8"
C	10.42"	14.84"
D	2.18"	2.72"
E	0.87"	0.87"

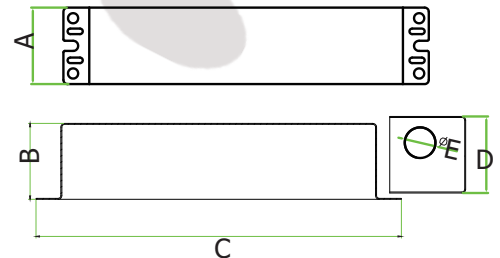

Due to continuous product improvement, information in this document is subject to change.

Revision Date: 01/15/2019

1939 Parker Ct Suite C Stone Mountain, GA 30087 | Phone: (866) 786-1117 |

www.beyondledtechnology.com