

# **VAIL**<sup>™</sup> 2nd Gen



Beyond LED's VAIL 2nd Gen LED Canopy Light Luminaire offers exceptional performance, efficiency and a unique design. Features such as high lumens per watt, outstanding efficacy and field serviceability, make it an ideal commercial canopy solution. The contractor-friendly VAIL 2nd Gen LED canopy Light luminaire includes fasteners and a locking collar, making installation easy, secure and water-tight. It can be surface mounted easily from below the canopy deck and also has the ability to be pendant mounted.

### **Product Features**

- Up to 156 Lumens per watt
- Includes J-Box
- Matte Lens
- IP65
- No UV or IR in the beam
- Light is soft and uniform, safe to eyes

- Beam angle 110o Degree
- Input Voltage 120-277Vac
- CRI: >80
- UL & DLC listed
- 5 Year warranty





SKU#	Model #	Watt	Lumens	ССТ	Housing	Input Voltage	Dimming	Certifications
156792	AST-CP02B-180WSBM	180W	28080Lm	5700K	White	120-277V	1-10V	UL & DLC
	A3-WH57							


## **Specifications**

Parameter	Description	Value		
	Model #	AST-CP02B-180WSBMA3-WH57		
	Wattage	180W		
	Lumen	28080LM		
General Performance	Lumen Efficacy	Up to 156LM/W		
renomiance	Color Temperature	5700K		
	CRI (Ra)	>80		
	Beam Angle	110° Degree		
	Diffuser Type	Matte lens		
	Input Voltage	120-277Vac		
	Frequency	50/60Hz		
	THD (Tolerance: +5%)	≤20%		
	Dimming	0-10V		
Electrical	Power Factor	≥0.9		
	Driver Brand	SOSEN		
	Driver Model	SS-200NH-E260BH		
	Driver Surge Protection	L/N-PE: 6kV, L-N: 6kV		
	Flicker Percent	<5%		
	Operating Temperature	-40°C To 40°C		
	Operating Humidity	20% - 90% RH		
	Storage Temperature	-40°C TO 80°C		
Physical	Storage Humidity	-10% - 95% RH		
	LED Brand	LUMILEDS		
	LED Type	SMD2835		
	LED QTY	1110 PCS		
	Housing	Die-cast Aluminum		
Ovalification	Housing Color	White		
Qualification	IP Rating	WET (IP65)		
	Warranty	5 Years Warranty		







# Correlated Color Temperature (CCT)

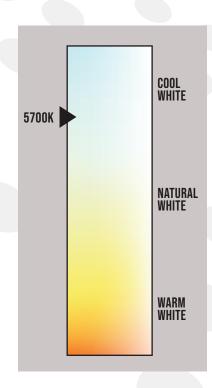

## **Dimensions**

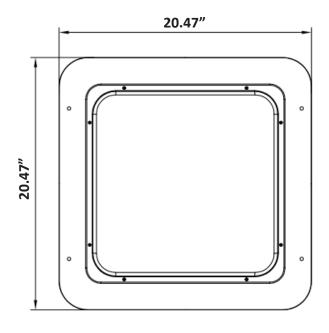

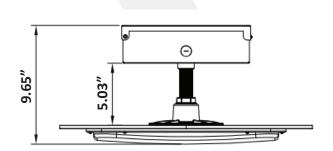





### **Photometric Data**

### **Luminaire Property**

Luminaire Manufacturer:

Luminaire Category:

Lamp Catalog:

Number of Lamps:

Luminous Length (mm):

Luminous Height (mm):

Current: 1.444 A

Power Factor: 0.999

Luminaire Description:

Lamp Description:

Lumens per Lamp:

Luminous Width (mm):

Voltage: 120.0V

Power: 173.07W

### **Photometric Results**

IES Classification: Type II

Total Rated Lamp Lumens: 26884.7 Im

Efficiency: 100%

Upward Ratio: 1%

COrO Intensity: 9801.02 cd

Pos of Max. Intensity: H315 V1

Max. Intensity: H315 V1

Longitudinal Classification: Very Short

Measurement Flux: 26884.7 Im


Downward Ratio: 99%

Luminaire Efficacy Rating (LER): 155.39


Max. Intensity: 9803.24 cd

Beam Angle(C0/C180,C90/C270,C45/C225,C135/135: 108.5, 107.6, 108.1, 108.1

#### Luminous Intensity Distribution Curve

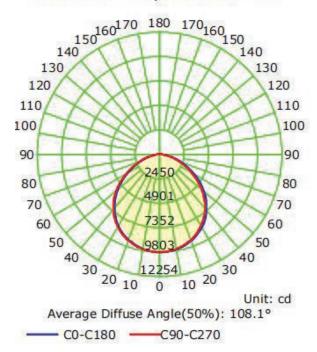

#### The Average Illuminance Effective Figure

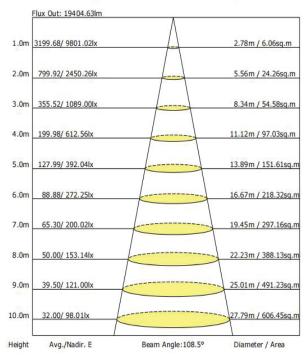







## **Installation Instruction**

### **LED Canopy Light**

#### **Cautions:**

- 1. Can not use the electric generator to test the LED lamp.
- 2. Please abide by related country, regional and local law and regulations when install this fixture.
- 3. Please turn off the power before installation or maintenance.
- 4. Proper earth grounding is required to ensure safety.

#### Notice.


- 1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
- 2. Please wear gloves to avoid injury before installation.
- 3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.

#### Attention:

- 1. Please check if there is any damage during shipping. If so, please contact manufacturer timely.
- 2. Please read the installation instruction carefully to check whether all the accessories are complete. After confirmation, then install the fixture according to installation steps.

### **Installation Steps**

1. Screw the aluminum pipe into the heatsink. (Figure 1)



3. Drill the installation hole accordingly on the ceiling. (Figure 3)




Figure 3

2. Screw the safety rope to heatsink by screwdriver. (Figure 2)



4. Lock the safety rope to the ceiling, assemble the installation plate to the aluminum pipe, then install led fixture. (Figure 4)




Figure 4






### **Installation Instruction**


5. Take the driver box apart by screwdriver. (Figure 5)






Figure


7. Connect the DC connector of led fixture with driver's DC connector. Remove the holes of the driver box if necessary. (Figure 7)



6. Assemble the 3/4 pipe nut to the aluminum pipe(fix the height and direction of driver box), across the DC connector through driver box, then screw the driver box onto the aluminum pipe. (Figure 6)

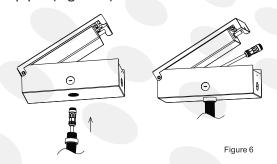

8. Connect the LED fixture to local power with necessary connector protection measures.

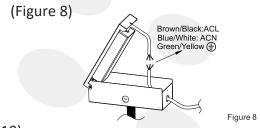

9. Finally, assemble the driver box. (Figure 9)(Figure 10)





Figure 9

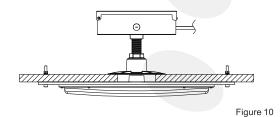

## Warning / Avertissement

MIN 75°C SUPPLY CONDUCTOR

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BYA PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

LES FILS D'ALIMENTATION 75°C MIN

CE PRODUIT DOIT ETRE INSTALLE SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAIT BIEN LE PRODUIT ET SON FONCTIONNEMENTAINSI QUE LES RISQUES INHERENTS.







### **Notice For User**

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamp

## **Trouble Shootings**

Troubles	Check Points		
Flickering of the light	Turn off the power and turn on again in 3 minutes.  If same phenomena occur, then call agencies.		
Out of Working	Please check the connection		

## **Packaging**

	Size	Qty / Carton	Net Weight	Gross Weight	
Outer Box	22.04 x 22.04 x 6.30	1 Pc	17.32 LBS	20.28 LBS	

## Warranty

**5 Years Warranty** 





# Application



