


parts enclosed:

| ITEM | DIAGRAM | DESCRIPTION | QTY |
|------|---------|-------------------------------------|------------------------|
| (A) | | Wire Connectors | 3 |
| (B) | | Mounting plate & green ground screw | 1 |
| (C) | | Mounting Screw | 2 |
| (D) | | Canopy Screw | 2 |
| (E) | | Canopy | 1 |
| (F) | | Pipe | 1*6" 1*12" 1*18" |
| (G) | | Socket | 1 |
| (H) | | Glass Shade | 1 |
| (I) | | Socket Collar | 1 |
| (J) | | Light bulb (not included) | 1 |
| (K) | | Loop | 2 |
| (L) | | Quick Link | 2 |
| (M) | | Chain | 1 |

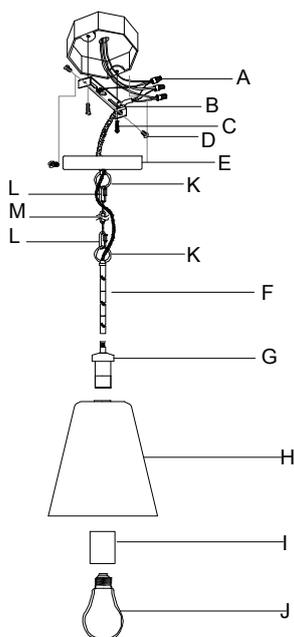

care instructions:

Wipe all surfaces with a soft, dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives on the fixture as they will damage the surface.

important safety instructions:

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage of one 60-watt Type A, T, or G incandescent bulb for this fixture.

warnings:


1. All wires are connected. Do not remove the fixture from packaging by pulling on the wires as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings. Take care not to lose any small parts.
2. Turn OFF power at the outlet box where the fixture will be installed.
3. Determine desired hanging height, feed the wires through Pipes (F), Loop (K), Quick Link (L), Chain (M), Quick Link (L), Loop (K), and Canopy (E).
4. Attach the Mounting Plate (B) to outlet box using the Mounting Screws (C), tighten with a screwdriver. Ensure the side of the Mounting Plate (B) marked "GND" is facing out.
5. While holding the fixture, connect the black wire from fixture to the hot wire (usually black or smooth) from the outlet box using a wire connector (A). Connect the white wire from fixture to the neutral wire (usually white or ribbed) from the outlet box using a wire connector (A). DO NOT REVERSE THE HOT AND NEUTRAL WIRE CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
6. If the outlet box has a ground wire (green or bare copper), connect the green ground wire from the fixture to it using a wire connector (A). If the outlet box does not have a ground wire, connect the green ground wire from the fixture to the green ground screw provided on the Mounting Plate (A).
5. Tuck these wire connections neatly into the outlet box, raise the Canopy (E) over Mounting Plate (B) and align the holes on the Canopy (E) with the corresponding holes on the Mounting Plate (B), secure the Canopy (E) with Canopy Screws (D) until the fixture is secured to the ceiling.
6. Place the Glass Shade (H) over Socket (G) and secure by screwing Socket Collar (I).
7. Install the proper light bulb (not included) in accordance with the fixture's specifications (DO NOT EXCEED THE SPECIFIED WATTAGE RATING).
8. Installation is completed. Turn on the power at the circuit breaker or fuse box. Turn the light switch to activate the fixture.

parts enclosed:

| ITEM | DIAGRAM | DESCRIPTION | QTY |
|------|---------|-------------------------------------|------------------------|
| (A) | | Wire Connectors | 3 |
| (B) | | Mounting plate & green ground screw | 1 |
| (C) | | Mounting Screw | 2 |
| (D) | | Canopy Screw | 2 |
| (E) | | Canopy | 1 |
| (F) | | Pipe | 1*6" 1*12" 1*18" |
| (G) | | Socket | 1 |
| (H) | | Glass Shade | 1 |
| (I) | | Socket Collar | 1 |
| (J) | | Light bulb (not included) | 1 |
| (K) | | Loop | 2 |
| (L) | | Quick Link | 2 |
| (M) | | Chain | 1 |

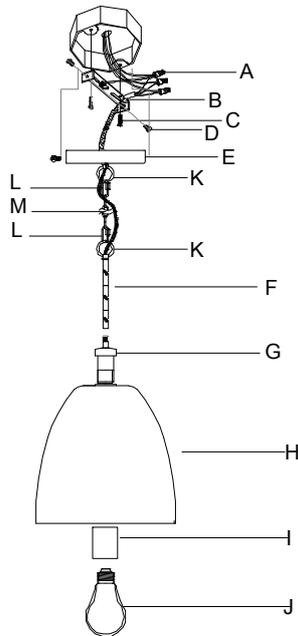

care instructions:

Wipe all surfaces with a soft, dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives on the fixture as they will damage the surface.

important safety instructions:

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage of one 60-watt Type A, T, or G incandescent bulb for this fixture.

warnings:


1. All wires are connected. Do not remove the fixture from packaging by pulling on the wires as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings. Take care not to lose any small parts.
2. Turn OFF power at the outlet box where the fixture will be installed.
3. Determine desired hanging height, feed the wires through Pipes (F), Loop (K), Quick Link (L), Chain (M), Quick Link (L), Loop (K), and Canopy (E).
4. Attach the Mounting Plate (B) to outlet box using the Mounting Screws (C), tighten with a screwdriver. Ensure the side of the Mounting Plate (B) marked "GND" is facing out.
5. While holding the fixture, connect the black wire from fixture to the hot wire (usually black or smooth) from the outlet box using a wire connector (A). Connect the white wire from fixture to the neutral wire (usually white or ribbed) from the outlet box using a wire connector (A). **DO NOT REVERSE THE HOT AND NEUTRAL WIRE CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.**
6. If the outlet box has a ground wire (green or bare copper), connect the green ground wire from the fixture to it using a wire connector (A). If the outlet box does not have a ground wire, connect the green ground wire from the fixture to the green ground screw provided on the Mounting Plate (A).
7. Tuck these wire connections neatly into the outlet box, raise the Canopy (E) over Mounting Plate (B) and align the holes on the Canopy (E) with the corresponding holes on the Mounting Plate (B), secure the Canopy (E) with Canopy Screws (D) until the fixture is secured to the ceiling.
8. Place the Glass Shade (H) over Socket (G) and secure by screwing Socket Collar (I).
7. Install the proper light bulb (not included) in accordance with the fixture's specifications (DO NOT EXCEED THE SPECIFIED WATTAGE RATING).
8. Installation is completed. Turn on the power at the circuit breaker or fuse box. Turn the light switch to activate the fixture.

parts enclosed:

| ITEM | DIAGRAM | DESCRIPTION | QTY |
|------|---------|-------------------------------------|------------------------|
| (A) | | Wire Connectors | 3 |
| (B) | | Mounting plate & green ground screw | 1 |
| (C) | | Mounting Screw | 2 |
| (D) | | Canopy Screw | 2 |
| (E) | | Canopy | 1 |
| (F) | | Pipe | 1*6" 1*12" 1*18" |
| (G) | | Socket | 1 |
| (H) | | Glass Shade | 1 |
| (I) | | Socket Collar | 1 |
| (J) | | Light bulb (not included) | 1 |
| (K) | | Loop | 2 |
| (L) | | Quick Link | 2 |
| (M) | | Chain | 1 |

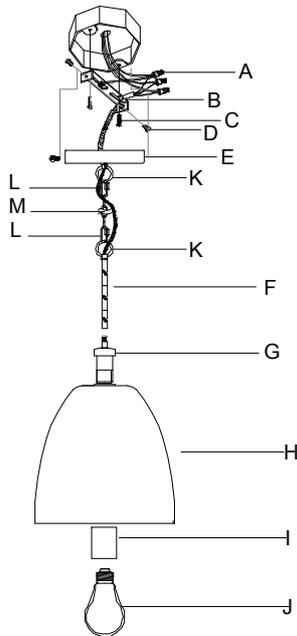

care instructions:

Wipe all surfaces with a soft, dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives on the fixture as they will damage the surface.

important safety instructions:

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage of one 60-watt Type A, T, or G incandescent bulb for this fixture.

warnings:


1. All wires are connected. Do not remove the fixture from packaging by pulling on the wires as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings. Take care not to lose any small parts.
2. Turn OFF power at the outlet box where the fixture will be installed.
3. Determine desired hanging height, feed the wires through Pipes (F), Loop (K), Quick Link (L), Chain (M), Quick Link (L), Loop (K), and Canopy (E).
4. Attach the Mounting Plate (B) to outlet box using the Mounting Screws (C), tighten with a screwdriver. Ensure the side of the Mounting Plate (B) marked "GND" is facing out.
5. While holding the fixture, connect the black wire from fixture to the hot wire (usually black or smooth) from the outlet box using a wire connector (A). Connect the white wire from fixture to the neutral wire (usually white or ribbed) from the outlet box using a wire connector (A). DO NOT REVERSE THE HOT AND NEUTRAL WIRE CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
6. If the outlet box has a ground wire (green or bare copper), connect the green ground wire from the fixture to it using a wire connector (A). If the outlet box does not have a ground wire, connect the green ground wire from the fixture to the green ground screw provided on the Mounting Plate (A).
7. Tuck these wire connections neatly into the outlet box, raise the Canopy (E) over Mounting Plate (B) and align the holes on the Canopy (E) with the corresponding holes on the Mounting Plate (B), secure the Canopy (E) with Canopy Screws (D) until the fixture is secured to the ceiling.
8. Place the Glass Shade (H) over Socket (G) and secure by screwing Socket Collar (I).
7. Install the proper light bulb (not included) in accordance with the fixture's specifications (DO NOT EXCEED THE SPECIFIED WATTAGE RATING).
8. Installation is completed. Turn on the power at the circuit breaker or fuse box. Turn the light switch to activate the fixture.

parts enclosed:

| ITEM | DIAGRAM | DESCRIPTION | QTY |
|------|---------|-------------------------------------|------------------------|
| (A) | | Wire Connectors | 3 |
| (B) | | Mounting plate & green ground screw | 1 |
| (C) | | Mounting Screw | 2 |
| (D) | | Canopy Screw | 2 |
| (E) | | Canopy | 1 |
| (F) | | Pipe | 1*6" 1*12" 1*18" |
| (G) | | Socket | 1 |
| (H) | | Glass Shade | 1 |
| (I) | | Socket Collar | 1 |
| (J) | | Light bulb (not included) | 1 |
| (K) | | Loop | 2 |
| (L) | | Quick Link | 2 |
| (M) | | Chain | 1 |

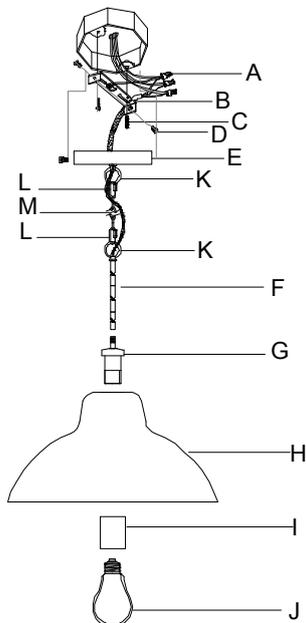

care instructions:

Wipe all surfaces with a soft, dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives on the fixture as they will damage the surface.

important safety instructions:

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage of one 60-watt Type A, T, or G incandescent bulb for this fixture.

warnings:


1. All wires are connected. Do not remove the fixture from packaging by pulling on the wires as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings. Take care not to lose any small parts.
2. Turn OFF power at the outlet box where the fixture will be installed.
3. Determine desired hanging height, feed the wires through Pipes (F), Loop (K), Quick Link (L), Chain (M), Quick Link (L), Loop (K), and Canopy (E).
4. Attach the Mounting Plate (B) to outlet box using the Mounting Screws (C), tighten with a screwdriver. Ensure the side of the Mounting Plate (B) marked "GND" is facing out.
5. While holding the fixture, connect the black wire from fixture to the hot wire (usually black or smooth) from the outlet box using a wire connector (A). Connect the white wire from fixture to the neutral wire (usually white or ribbed) from the outlet box using a wire connector (A). **DO NOT REVERSE THE HOT AND NEUTRAL WIRE CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.**
6. If the outlet box has a ground wire (green or bare copper), connect the green ground wire from the fixture to it using a wire connector (A). If the outlet box does not have a ground wire, connect the green ground wire from the fixture to the green ground screw provided on the Mounting Plate (A).
7. Tuck these wire connections neatly into the outlet box, raise the Canopy (E) over Mounting Plate (B) and align the holes on the Canopy (E) with the corresponding holes on the Mounting Plate (B), secure the Canopy (E) with Canopy Screws (D) until the fixture is secured to the ceiling.
8. Place the Glass Shade (H) over Socket (G) and secure by screwing Socket Collar (I).
7. Install the proper light bulb (not included) in accordance with the fixture's specifications (DO NOT EXCEED THE SPECIFIED WATTAGE RATING).
8. Installation is completed. Turn on the power at the circuit breaker or fuse box. Turn the light switch to activate the fixture.

parts enclosed:

| ITEM | DIAGRAM | DESCRIPTION | QTY |
|------|---------|-------------------------------------|------------------------|
| (A) | | Wire Connectors | 3 |
| (B) | | Mounting plate & green ground screw | 1 |
| (C) | | Mounting Screw | 2 |
| (D) | | Canopy Screw | 2 |
| (E) | | Canopy | 1 |
| (F) | | Pipe | 1*6" 1*12" 1*18" |
| (G) | | Socket | 1 |
| (H) | | Glass Shade | 1 |
| (I) | | Socket Collar | 1 |
| (J) | | Light bulb (not included) | 1 |
| (K) | | Loop | 2 |
| (L) | | Quick Link | 2 |
| (M) | | Chain | 1 |

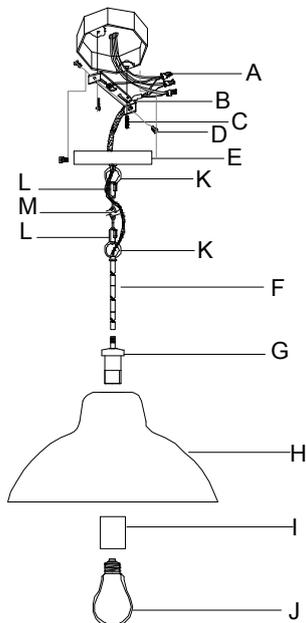

care instructions:

Wipe all surfaces with a soft, dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives on the fixture as they will damage the surface.

important safety instructions:

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage of one 60-watt Type A, T, or G incandescent bulb for this fixture.

warnings:


1. All wires are connected. Do not remove the fixture from packaging by pulling on the wires as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings. Take care not to lose any small parts.
2. Turn OFF power at the outlet box where the fixture will be installed.
3. Determine desired hanging height, feed the wires through Pipes (F), Loop (K), Quick Link (L), Chain (M), Quick Link (L), Loop (K), and Canopy (E).
4. Attach the Mounting Plate (B) to outlet box using the Mounting Screws (C), tighten with a screwdriver. Ensure the side of the Mounting Plate (B) marked "GND" is facing out.
5. While holding the fixture, connect the black wire from fixture to the hot wire (usually black or smooth) from the outlet box using a wire connector (A). Connect the white wire from fixture to the neutral wire (usually white or ribbed) from the outlet box using a wire connector (A). **DO NOT REVERSE THE HOT AND NEUTRAL WIRE CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.**
6. If the outlet box has a ground wire (green or bare copper), connect the green ground wire from the fixture to it using a wire connector (A). If the outlet box does not have a ground wire, connect the green ground wire from the fixture to the green ground screw provided on the Mounting Plate (A).
7. Tuck these wire connections neatly into the outlet box, raise the Canopy (E) over Mounting Plate (B) and align the holes on the Canopy (E) with the corresponding holes on the Mounting Plate (B), secure the Canopy (E) with Canopy Screws (D) until the fixture is secured to the ceiling.
8. Place the Glass Shade (H) over Socket (G) and secure by screwing Socket Collar (I).
7. Install the proper light bulb (not included) in accordance with the fixture's specifications (**DO NOT EXCEED THE SPECIFIED WATTAGE RATING**).
8. Installation is completed. Turn on the power at the circuit breaker or fuse box. Turn the light switch to activate the fixture.

parts enclosed:

| ITEM | DIAGRAM | DESCRIPTION | QTY |
|------|---------|-------------------------------------|------------------------|
| (A) | | Wire Connectors | 3 |
| (B) | | Mounting plate & green ground screw | 1 |
| (C) | | Mounting Screw | 2 |
| (D) | | Canopy Screw | 2 |
| (E) | | Canopy | 1 |
| (F) | | Pipe | 1*6" 1*12" 1*18" |
| (G) | | Socket | 1 |
| (H) | | Glass Shade | 1 |
| (I) | | Socket Collar | 1 |
| (J) | | Light bulb (not included) | 1 |
| (K) | | Loop | 2 |
| (L) | | Quick Link | 2 |
| (M) | | Chain | 1 |

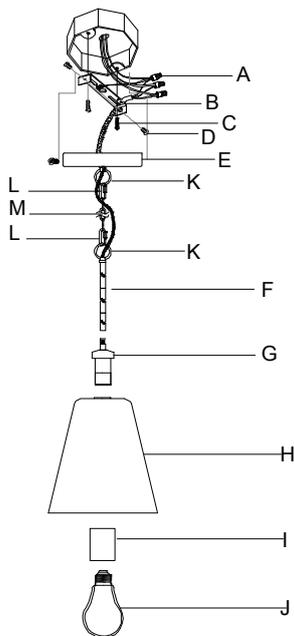

care instructions:

Wipe all surfaces with a soft, dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives on the fixture as they will damage the surface.

important safety instructions:

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage of one 60-watt Type A, T, or G incandescent bulb for this fixture.

warnings:



1. All wires are connected. Do not remove the fixture from packaging by pulling on the wires as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, always turn off fixture and allow it to cool prior to replacing the lightbulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings. Take care not to lose any small parts.
2. Turn OFF power at the outlet box where the fixture will be installed.
3. Determine desired hanging height, feed the wires through Pipes (F), Loop (K), Quick Link (L), Chain (M), Quick Link (L), Loop (K), and Canopy (E).
4. Attach the Mounting Plate (B) to outlet box using the Mounting Screws (C), tighten with a screwdriver. Ensure the side of the Mounting Plate (B) marked "GND" is facing out.
5. While holding the fixture, connect the black wire from fixture to the hot wire (usually black or smooth) from the outlet box using a wire connector (A). Connect the white wire from fixture to the neutral wire (usually white or ribbed) from the outlet box using a wire connector (A). DO NOT REVERSE THE HOT AND NEUTRAL WIRE CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
8. If the outlet box has a ground wire (green or bare copper), connect the green ground wire from the fixture to it using a wire connector (A). If the outlet box does not have a ground wire, connect the green ground wire from the fixture to the green ground screw provided on the Mounting Plate (A).
5. Tuck these wire connections neatly into the outlet box, raise the Canopy (E) over Mounting Plate (B) and align the holes on the Canopy (E) with the corresponding holes on the Mounting Plate (B), secure the Canopy (E) with Canopy Screws (D) until the fixture is secured to the ceiling.
6. Place the Glass Shade (H) over Socket (G) and secure by screwing Socket Collar (I).
7. Install the proper light bulb (not included) in accordance with the fixture's specifications (DO NOT EXCEED THE SPECIFIED WATTAGE RATING).
8. Installation is completed. Turn on the power at the circuit breaker or fuse box. Turn the light switch to activate the fixture.

parts enclosed:

| ITEM | DIACRAM | DESCRIPTION | QTY |
|------|-------------------------------------------------------------------------------------|-------------------------------------|-----|
| (A) |  | Mounting Plate & Green Ground Screw | 1 |
| (B) |  | Mounting Screw | 2 |
| (C) |  | Ceiling Loop | 1 |
| (D) |  | Wire Connectors | 3 |
| (E) |  | Nipple | 1 |
| (F) |  | Hex Nut | 2 |
| (G) |  | Quick Link | 2 |
| (H) |  | Canopy | 1 |
| (I) |  | Lock Collar | 1 |
| (J) |  | Chain | 1 |
| (K) |  | GLASS SHADE | 1 |
| (L) |  | GLASS SHADE | 1 |
| (M) |  | Ring | 4 |

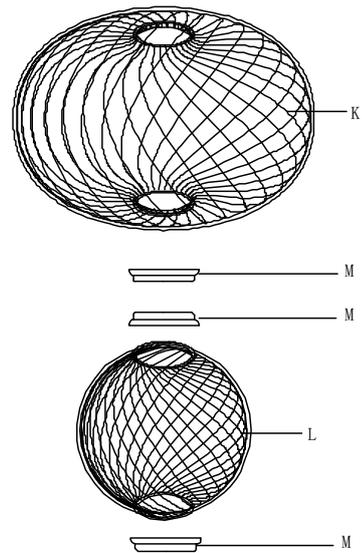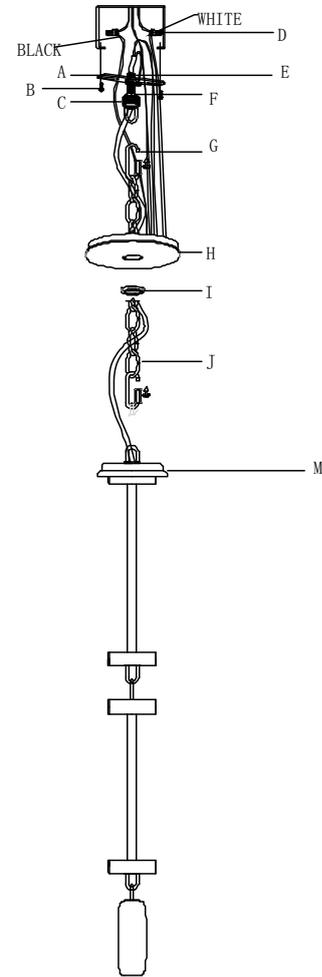

important safety instructions:

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

1. We recommend installation by a licensed electrician.

warnings:

1. All wires are connected. When unpacking, be carefully not to remove the fixture from packaging by pulling on the power cord as a bad connection may result. Do not connect electricity until the fixture is fully assembled.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off fixture and allow it to cool prior to replacing the glass.
3. Do not touch glass when fixture is turned on or look directly at lit lamp. Keep flammable materials away from lit fixture.

to assemble and install:

1. Shut off power at the outlet box where the fixture will be installed.
2. Carefully remove all parts from the box and remove all plastic coverings. Take care not to lose any small parts.
3. Insert fixture body into Glass Shade (K) until Glass Shade touches the Ring (M) on the top, thread the Ring (M) onto the threaded collar at the bottom of glass shade (K) to hold glass shade in place.
4. Assemble the Ring (M), Glass Shade (L) and Ring (M) to the fixture body, secure Glass Shade (L) in place by threading the Rings (M) onto the threaded collars at top and bottom of glass shade (L).
5. Attached the Mounting Plate (A) to the outlet box using the Mounting Screws (B). Ensure the side of the Mounting Plate (A) marked "GND" is facing out.


6. Determine the desired hanging height, attach the Chain (J) to the fixture body by Quick Link (G), raise the assembled fixture toward the ceiling, attach the other end of Chain (J) to the Ceiling Loop (C) by Quick Link (G). Feed the fixture wires through the Chain (J), Lock Collar (I), Canopy (H), Ceiling Loop (C) and the Nipple (E).
7. While holding the fixture, connect the black wire from fixture to the hot wire (usually black or smooth) from the outlet box using a wire connector (D). Connect the white wire from fixture to the neutral wire (usually white or ribbed) from the outlet box using a wire connector (D). DO NOT REVERSE THE HOT AND NEUTRAL WIRE CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
8. If the outlet box has a ground wire (green or bare copper), connect the green ground wire from the fixture to it using a wire connector (D). If the outlet box does not have a ground wire, connect the green ground wire from the fixture to the green ground screw provided on the Mounting Plate (A).
9. Tuck these wire connections neatly into the outlet box, raise the Canopy (H) over the Ceiling Loop (C), secure the canopy in place with the Lock Collar (I).
10. Installation is completed. Turn on the power at the circuit breaker or fuse box. Turn the light switch on to activate the fixture.

care instructions:

Wipe all surfaces with a soft, dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives on our lamp, as they will damage the finish.

parts enclosed:

| ITEM | DIACRAM | DESCRIPTION | QTY |
|------|-------------------------------------------------------------------------------------|-------------------------------------|-----|
| (A) |  | Mounting Plate & Green Ground Screw | 1 |
| (B) |  | Mounting Screw | 2 |
| (C) |  | Ceiling Loops | 1 |
| (D) |  | Wire Connectors | 3 |
| (E) |  | Nipple | 1 |
| (F) |  | Hex Nut | 2 |
| (G) |  | Quick Link | 2 |
| (H) |  | Canopy | 1 |
| (I) |  | Lock Collar | 1 |
| (J) |  | Chain | 1 |
| (K) |  | GLASS | 1 |
| (L) |  | RING | 2 |

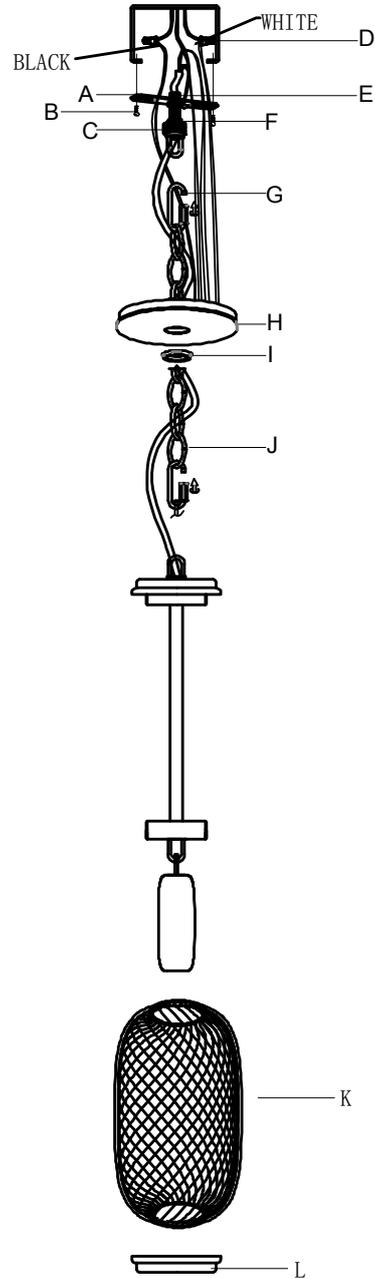

important safety instructions:
**CONSULT A QUALIFIED ELECTRICIAN TO ENSURE
CORRECT BRANCH CIRCUIT CONDUCTOR.**

1. We recommend installation by a licensed electrician.

warnings:

1. All wires are connected. When unpacking, be carefully not to remove the fixture from packaging by pulling on the power cord as a bad connection may result. Do not connect electricity until the fixture is fully assembled.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off fixture and allow it to cool prior to replacing the glass.
3. Do not touch glass when fixture is turned on or look directly at lit lamp. Keep flammable materials away from lit fixture.

to assemble and install:

1. Shut off power at the outlet box where the fixture will be installed.
2. Carefully remove all parts from the box and remove all plastic coverings. Take care not to lose any small parts.
3. Insert fixture body into Glass Shade (K) until Glass Shade touches Metal Cap Cover on the top, thread the Ring (L) onto the threaded collar at the bottom of Glass Shade (K) to fix it in place.
4. Attached the Mounting Plate (A) to the outlet box using the Mounting Screws (B). Ensure the side of the Mounting Plate marked "GND" is facing out.
5. Determine the desired hanging height, attach the Chain (J) to the fixture body by Quick Link (G), raise the assembled fixture toward the ceiling, and attach the other end of Chain (J) to the Ceiling Loop (C) by Quick Link (G). Feed the fixture wires through the Chain (J), Lock Collar (I), Canopy (H), Ceiling Loop (C) and the Nipple (E).


6. While holding the fixture, connect the black wire from fixture to the hot wire (usually black or smooth) from the outlet box using a Wire Connector (D). Connect the white wire from fixture to the neutral wire (usually white or ribbed) from the outlet box using a wire connector (D). DO NOT REVERSE THE HOT AND NEUTRAL WIRE CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
7. If the outlet box has a ground wire (green or bare copper), connect the green ground wire from the fixture to it using a Wire Connector (D). If the outlet box does not have a ground wire, connect the green ground wire from the fixture to the green ground screw provided on the Mounting Plate (A).
8. Tuck these wire connections neatly into the outlet box, raise the Canopy (H) over the Ceiling Loop (C), secure the canopy in place with the Lock Collar (I).
9. Installation is completed. Turn on the power at the circuit breaker or fuse box. Turn the light switch on to activate the fixture.

care instructions:

Wipe all surfaces with a soft, dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives on our lamp, as they will damage the finish.

parts enclosed:

| ITEM | DIACRAM | DESCRIPTION | QTY |
|------|-------------------------------------------------------------------------------------|-------------------------------------|-----|
| (A) |  | Mounting Plate & Green Ground Screw | 1 |
| (B) |  | Mounting Screw | 2 |
| (C) |  | Ceiling Loops | 1 |
| (D) |  | Wire Connectors | 3 |
| (E) |  | Nipple | 1 |
| (F) |  | Hex Nut | 2 |
| (G) |  | Quick Link | 2 |
| (H) |  | Canopy | 1 |
| (I) |  | Lock Collar | 1 |
| (J) |  | Chain | 1 |
| (K) |  | GLASS | 1 |
| (L) |  | RING | 2 |

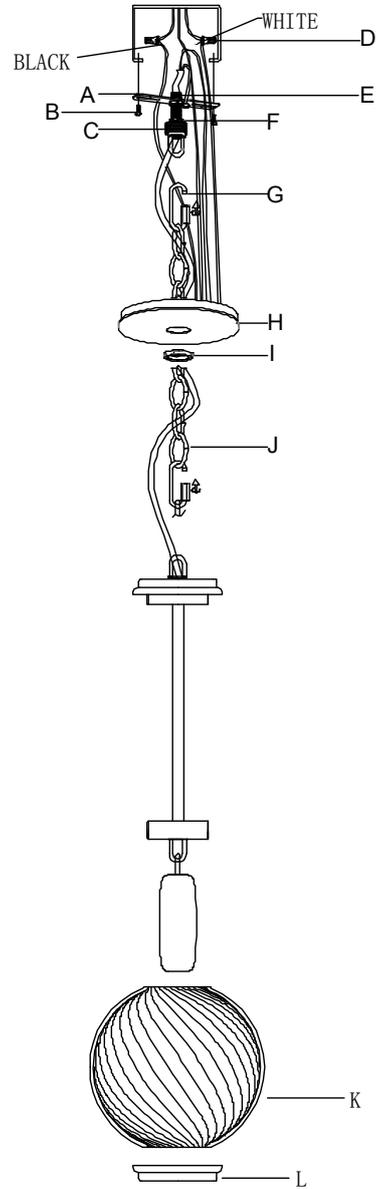

important safety instructions:
**CONSULT A QUALIFIED ELECTRICIAN TO ENSURE
CORRECT BRANCH CIRCUIT CONDUCTOR.**

1. We recommend installation by a licensed electrician.

warnings:

1. All wires are connected. When unpacking, be carefully not to remove the fixture from packaging by pulling on the power cord as a bad connection may result. Do not connect electricity until the fixture is fully assembled.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off fixture and allow it to cool prior to replacing the glass.
3. Do not touch glass when fixture is turned on or look directly at lit lamp. Keep flammable materials away from lit fixture.

to assemble and install:

1. Shut off power at the outlet box where the fixture will be installed.
2. Carefully remove all parts from the box and remove all plastic coverings. Take care not to lose any small parts.
3. Insert fixture body into Glass Shade (K) until Glass Shade touches Metal Cap Cover on the top, thread the Ring (L) onto the threaded collar at the bottom of Glass Shade (K) to fix it in place.
4. Attached the Mounting Plate (A) to the outlet box using the Mounting Screws (B). Ensure the side of the Mounting Plate marked "GND" is facing out.
5. Determine the desired hanging height, attach the Chain (J) to the fixture body by Quick Link (G), raise the assembled fixture toward the ceiling, and attach the other end of Chain (J) to the Ceiling Loop (C) by Quick Link (G). Feed the fixture wires through the Chain (J), Lock Collar (I), Canopy (H), Ceiling Loop (C) and the Nipple (E).

6. While holding the fixture, connect the black wire from fixture to the hot wire (usually black or smooth) from the outlet box using a Wire Connector (D). Connect the white wire from fixture to the neutral wire (usually white or ribbed) from the outlet box using a wire connector (D). DO NOT REVERSE THE HOT AND NEUTRAL WIRE CONNECTIONS; OTHERWISE, SAFETY WILL BE COMPROMISED.
7. If the outlet box has a ground wire (green or bare copper), connect the green ground wire from the fixture to it using a Wire Connector (D). If the outlet box does not have a ground wire, connect the green ground wire from the fixture to the green ground screw provided on the Mounting Plate (A).
8. Tuck these wire connections neatly into the outlet box, raise the Canopy (H) over the Ceiling Loop (C), secure the canopy in place with the Lock Collar (I).
9. Installation is completed. Turn on the power at the circuit breaker or fuse box. Turn the light switch on to activate the fixture.

care instructions:

Wipe all surfaces with a soft, dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives on our lamp, as they will damage the finish.

parts enclosed:

| Part | Description | Qty. |
|------|-------------------|------|
| A | top body | 1 |
| B | centre pole #B | 1 |
| C | centre pole #C | 1 |
| D | marble stone base | 1 |
| E | buckle | 1 |
| F | flannelette | 1 |
| G | cable | 1 |

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

warnings:



1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:


1. Carefully remove all parts from the box.
2. Install centre pole (C) on the marble stone base (D) first, then install centre pole (B) on the top body (A), then adjust the cable (G) at bottom of the base (D) and link centre pole (B) and centre pole (C) together.
3. Adjust the length of the cable (G) again and lock the cable with screwing the buckle (E).
4. Peel off the yellow paper on the flannelette (F) and then stick it on the bottom marble stone base (D).
5. Install the bulbs on the sockets.
6. Plug into a proper electrical outlet and test the fixture.
7. Installation is complete.

care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

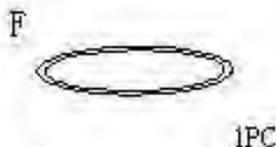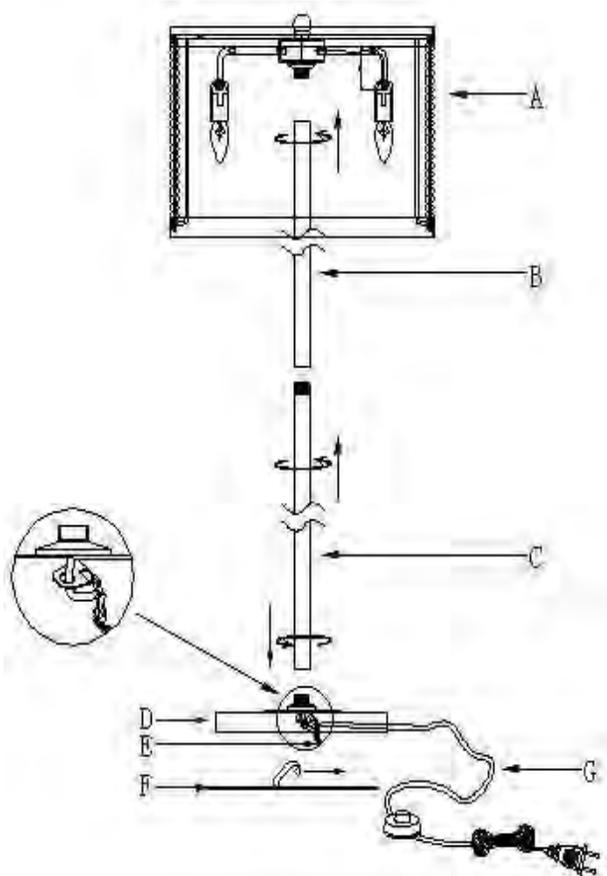

parts enclosed:

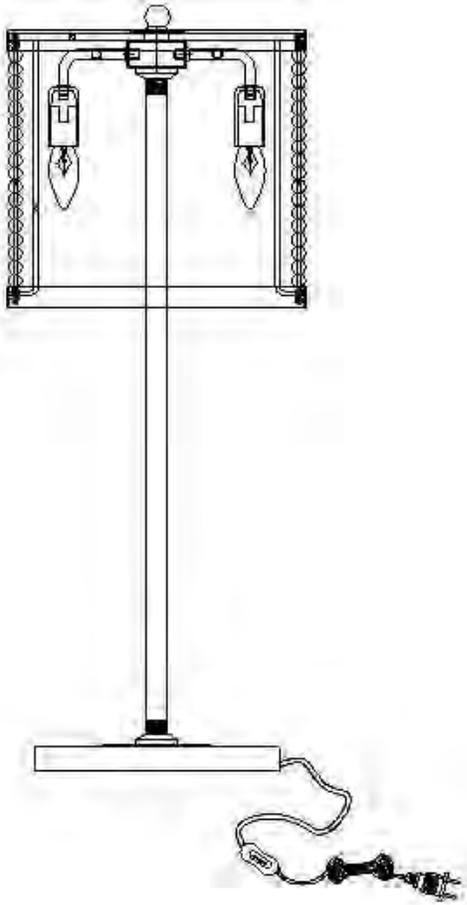

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box.
2. Install the bulbs on the sockets.
3. Plug the lamp into wall outlet.

care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

parts enclosed:

- Sconce body (1)
- Glass shade (1)
- A19 LED Bulb (1)
- Washer (2)
- Mounting screw (4)
- Wiring nut (3)
- Thumbscrews (3)

important safety instructions:


1. Installation by a licensed electrician is strongly recommended.
2. Turn off circuit breakers and power supply to the fixture. Failure to disconnect power supply prior to installation may result in serious injury.

warnings:

All wires are connected. When unpacking, be careful not to pull wires, as a bad connection may result.

to assemble:

1. Connect bare ground wire from fixture to bare ground wire from outlet box using wire connector (A).
2. Attach mounting plate (B) to J-Box using screws (C).
3. Attach sconce body (D) to mounting plate (B) and secure with screw (F) and washer (E).
4. Insert bulb (G) into the socket (I).
5. Place glass shade (H) onto socket (I) and secure with thumbscrews (J).
6. Assembly is complete.

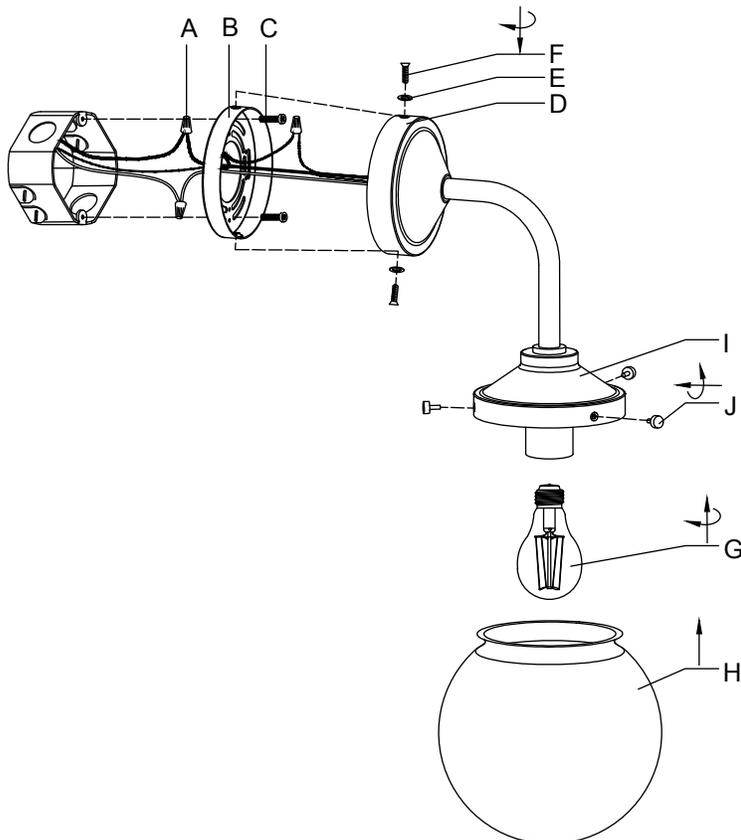

care instructions:

Wipe with a clean, dry cloth. Do not use acid or corrosive liquid to clean the lamp.

BICYCLE DESK LAMP

parts enclosed:

important safety instructions:

1. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.


UL NO: E355648, UL RATING: DRY, MAX BULB WATTAGE: 60 W
CONVERSION TO MAX LED WATTAGE: 13 W
BULB: 1 X A-15 (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. The lamp is fully assembled to plug and use.

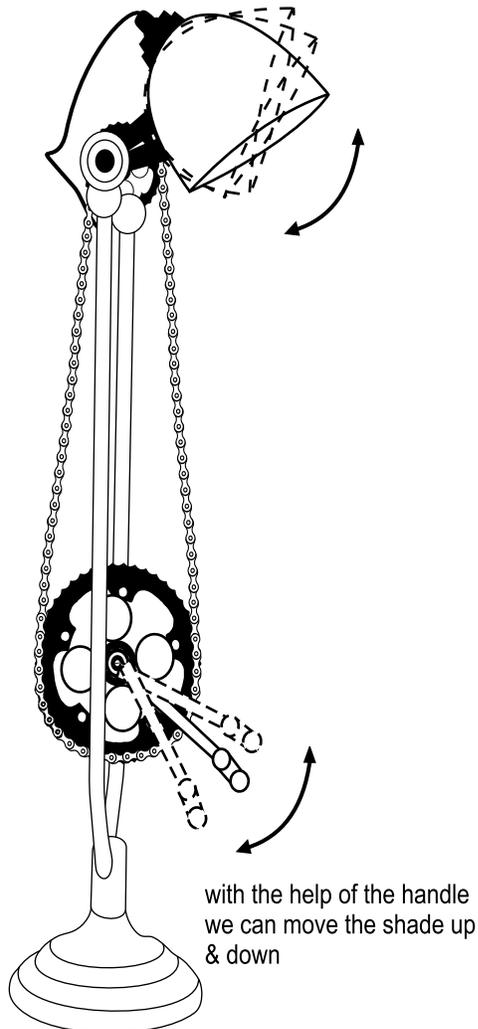

care instructions:

Do not use polishes or cleaners on your lamp. Just wipe with soft, lint free cloth.

BONITA 3 LTS CHANDELIER #65636H0358

ARHAUS®

your home

parts enclosed:

- (D) wire nuts (3)
- (E) cross bar set (1)
- (F) cross bar screws (2)
- (I) canopy (1)

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

wattage: 3 x 40W
type of socket: E12

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

- Attach cross bar (E) to the ceiling junction box using the cross bar screws (F).
- Unscrew the collar ring (J).
- Insert the collar loop (H) into the canopy (I).
- Screw the collar ring (J) back.
- Attach the chandelier chain (L) to the collar loop (H) with the quick link (K).



See back of the page for wiring connection details.


replacement parts assembly:

- To replace the Long glass drop (N), insert wire clip into the hole on the iron frame. twist the wire to close the loop and secure it in place.

care instructions:

Clean with dry soft cloth/brush only.
Do not use water/alcohol or any detergent.

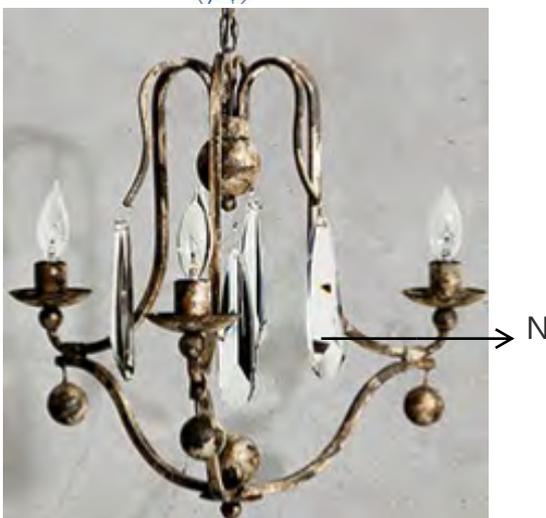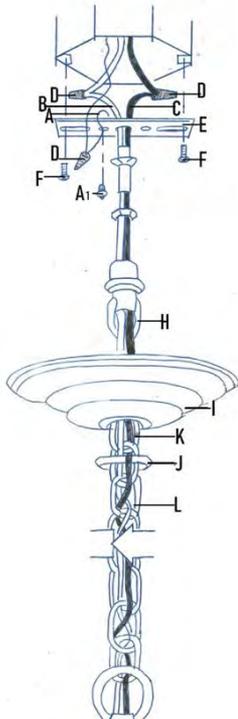

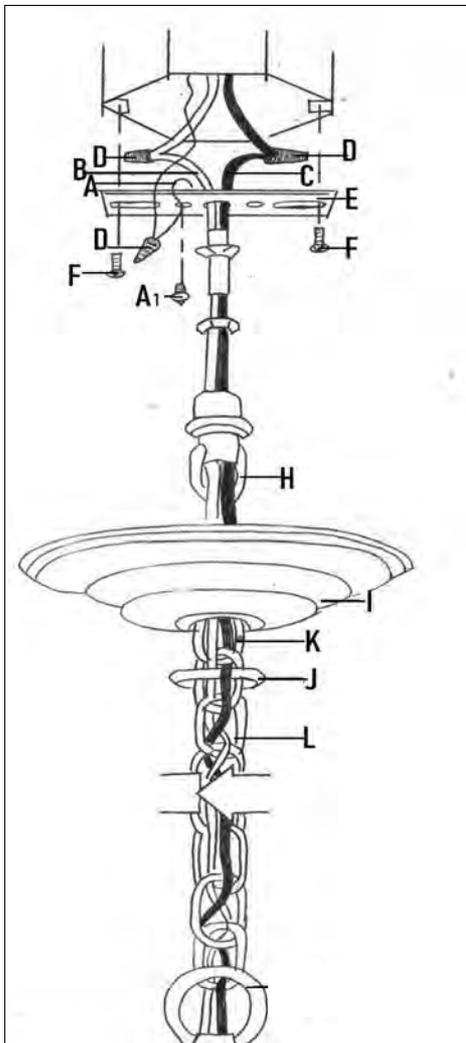

INSTALLATION INSTRUCTIONS

INCANDESCENT SURFACE MOUNTED LUMINAIRES:

CAUTION

- A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT MUST INSTALL THIS PRODUCT IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE AND THE HAZARDS INVOLVED.

WARNING

- The electricity MUST be turned off at the MAIN FUSE BOX before installation of this luminaire; turning the power off using the light switch is not sufficient to prevent electrical shock.
- Luminaires weighing 50 lbs (25 lbs for surface wall) or more must be mounted directly to the building structure, independently of the electrical box; this installation should not be made on a radiant heat type ceiling.

- If a chain-and-canopy luminaire is provided of an individual grounding conductor (bare or insulated), this shall be interwoven through the chain from the luminaire to the canopy.
- If chain-and-canopy luminaire is provided of a SPT-1 power supply cord type, this shall interwoven through the chain from the luminaire to the canopy.
- The luminaires are not intended to support external weight other than provided glasses.

- WIRE CONNECTION CHART:

| Connect Black or Red (Hot) House Wire to: | Connect White (Neutral) House Wire to: |
|---------------------------------------------------------|---------------------------------------------------------|
| Black (Hot) | White (Neutral) |
| Parallel cord (round and smooth) | Parallel cord (square or ridged) |
| Clear, Brown, Gold or Black without tracer | Clear, Brown, Gold or Black with tracer |
| Insulated wire (other than green) with copper conductor | Insulated wire (other than green) with silver conductor |

- ELECTRICAL CONNECTION:

1 Attach grounding wire (green insulated or bare copper) from the supply circuit to the mounting bracket with the green ground attachment screw provided. Connect the grounding wire of the luminaire to the grounding conductor of the supply circuit. Attach all grounding conductors to the mounting bracket with the green ground wire attachment screw.

2 Referring to the Wire Connection Chart, connect the black and white wires.


CAUTION

No loose strands or loose connections should be present. Secure with U.L. certified wire connectors and electrical tape.

- FINAL INSTRUCTION:

- 1 Install light bulbs, refer to the relamping label located near the lampholder for recommended wattage. DO NOT EXCEED THE RECOMMENDED WATTAGE.
- 2 Restore electricity and check the operation of the luminaire.

In case of change of the article, not previously authorized, the UL Certification will be terminated immediately

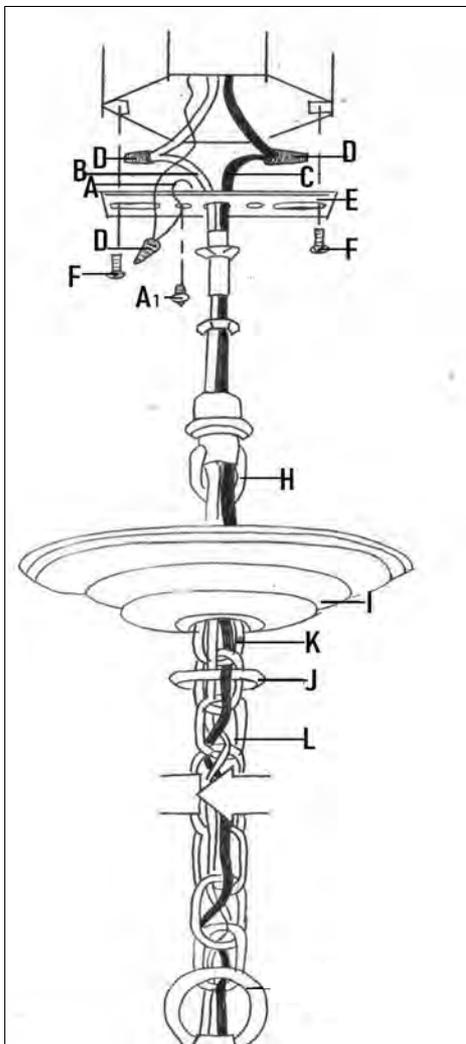

NOTICE DE MONTAGE PLAFONNIERES INCANDESCENTES

ATTENTION

- Le montage doit être effectué par personnes compétentes selon le code d'installation en vigueur et les risques impliqués.
- La sûreté de l'installation est soumise au correct usage des instructions suivantes

AVERTISSEMENT

- Avant d'effectuer chaque opération, couper le courant à la boîte du fusible principale. La mise hors tension grâce à l'interrupteur n'est pas suffisante pour prévenir les chocs électriques.
- Luminaires qui sont lourds 50 Lbs. Ou plus (25 Lbs. Pour appareil mur) doivent être montés directement à la structure du bâtiment, de façon indépendante de la boîte électrique; cette installation ne doit pas être fait sur un plafond avec systèmes de chauffages radiants
- Dans le cas du luminaire avec chaîne et pavillon, il faut passé les câbles à travers les maillons de la chaîne, soit s'il est équipé avec un câble conducteur de mise à la terre individuelle (nu ou isolé), soit s'il est équipé avec un câble d'alimentation SPT-1.
- Les appareils ne devraient pas porte plus de poids que celle prévue pour les verres décoratif

• TABLE CONNEXION CABLES:

| Connecter le fil de la maison NOIR ou ROUGE (phase) avec: | Connecter le fil de la maison BLANC (neutre) avec: |
|-----------------------------------------------------------|----------------------------------------------------|
| Noir (Phase) | Blanc (neutre) |
| Fil parallèle (ronde et lisse) | Fil parallèle (carré ou striée) |
| Clair, Marron, Or ou Noir SANS traceur | Clair, Marron, or ou Noir AVEC traceur |
| Fil isolé (autre que Vert) avec conducteur Cuivre | Fil isolé (autre que Vert) avec conducteur Argent |

• CONNEXIONS ÉLECTRIQUES

1. Fixez le fil de terre (vert isolé ou cuivre nu) du circuit d'alimentation au support de montage par la vis vert de fixation de terre fourni.
2. Connectez le fil de mise à la terre du luminaire au conducteur de mise à la terre du circuit d'alimentation. Fixez tous les conducteurs de terre au support de montage avec la vis vert de fixation.
3. Connectez les fils noir et blanc en référant à la table connexion câbles

ATTENTION

Fil libre ou des connexions desserrées ne doivent pas être présents. Fixer avec des connecteurs de fils certifié UL et du ruban électrique.

• INSTALLATION FINALE

1. Installer des ampoules de puissance recommandée, reportez-vous à l'étiquette de remplacement de la lampe situé en proximité de la douille.
2. Ne pas dépasser la puissance recommandée

AVERTISSEMENT

Instructions supplémentaires

Pour la fixation, utiliser les vis fournies et vérifier que le pavillon couvre complètement la boîte de sortie.

En cas de changement d'article, pas autorisé précédemment, la certification UL se terminera immédiatement.

BONITA 6 LTS CHANDELIER #65636H0155

ARHAUS®

your home

parts enclosed:

- (D) wire nuts (3)
- (E) cross bar set (1)
- (F) cross bar screws (2)
- (I) canopy (1)

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

wattage: 6 x 40W
type of socket: E12

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

- Remove protective packaging above metal spheres only once chandelier is hanging.
- Attach cross bar (E) to the ceiling junction box using the cross bar screws (F).
- Unscrew the collar ring (J).
- Insert the collar loop (H) into the canopy (I).
- Screw the collar ring (J) back.
- Attach the chandelier chain (L) to the collar loop (H) with the quick link (K).

See back of the page for wiring connection details.

replacement parts assembly:

- To replace the long glass drop(N) insert wire clip into the hole on the iron frame, twist the wire to close the loop and secure it in place.

care instructions:

Clean with dry soft cloth/brush only.
Do not use water/alcohol or any detergent.



INSTALLATION INSTRUCTIONS

INCANDESCENT SURFACE MOUNTED LUMINAIRES:

CAUTION

- A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT MUST INSTALL THIS PRODUCT IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE AND THE HAZARDS INVOLVED.

WARNING

- The electricity MUST be turned off at the MAIN FUSE BOX before installation of this luminaire; turning the power off using the light switch is not sufficient to prevent electrical shock.
- Luminaires weighing 50 lbs (25 lbs for surface wall) or more must be mounted directly to the building structure, independently of the electrical box; this installation should not be made on a radiant heat type ceiling.

- If a chain-and-canopy luminaire is provided of an individual grounding conductor (bare or insulated), this shall be interwoven through the chain from the luminaire to the canopy.
- If chain-and-canopy luminaire is provided of a SPT-1 power supply cord type, this shall interwoven through the chain from the luminaire to the canopy.
- The luminaires are not intended to support external weight other than provided glasses.

- WIRE CONNECTION CHART:

| Connect Black or Red (Hot) House Wire to: | Connect White (Neutral) House Wire to: |
|---------------------------------------------------------|---------------------------------------------------------|
| Black (Hot) | White (Neutral) |
| Parallel cord (round and smooth) | Parallel cord (square or ridged) |
| Clear, Brown, Gold or Black without tracer | Clear, Brown, Gold or Black with tracer |
| Insulated wire (other than green) with copper conductor | Insulated wire (other than green) with silver conductor |

- ELECTRICAL CONNECTION:

- 1 Attach grounding wire (green insulated or bare copper) from the supply circuit to the mounting bracket with the green ground attachment screw provided. Connect the grounding wire of the luminaire to the grounding conductor of the supply circuit. Attach all grounding conductors to the mounting bracket with the green ground wire attachment screw.

- 2 Referring to the Wire Connection Chart, connect the black and white wires.


CAUTION

No loose strands or loose connections should be present. Secure with U.L. certified wire connectors and electrical tape.

- FINAL INSTRUCTION:

- 1 Install light bulbs, refer to the relamping label located near the lampholder for recommended wattage. DO NOT EXCEED THE RECOMMENDED WATTAGE.
- 2 Restore electricity and check the operation of the luminaire.

In case of change of the article, not previously authorized, the UL Certification will be terminated immediately

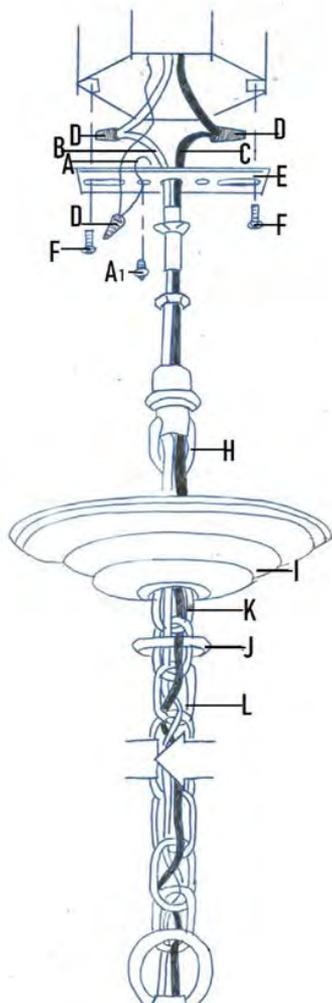

NOTICE DE MONTAGE PLAFONNIERES INCANDESCENTS

ATTENTION

- Le montage doit être effectué par personnes compétentes selon le code d'installation en vigueur et les risques impliqués.
- La sûreté de l'installation est soumise au correct usage des instructions suivantes

AVERTISSEMENT

- Avant d'effectuer chaque opération, couper le courant à la boîte du fusible principale. La mise hors tension grâce à l'interrupteur n'est pas suffisante pour prévenir les chocs électriques.
- Luminaires qui sont lourds 50 Lbs. Ou plus (25 Lbs. Pour appareil mur) doivent être montés directement à la structure du bâtiment, de façon indépendante de la boîte électrique; cette installation ne doit pas être fait sur un plafond avec systèmes de chauffages radiants
- Dans le cas du luminaire avec chaîne et pavillon, il faut passé les câbles a travers les maillons de la chaîne, soit s'il est équipé avec un câble conducteur de mise à la terre individuelle (nu ou isolé), soit s'il est équipé avec un câble d'alimentation SPT-1.
- Les appareils ne devraient pas porte plus de poids que celle prévue pour les verres décoratif

• TABLE CONNEXION CABLES:

| Connecter le fil de la maison NOIR ou ROUGE (phase) avec: | Connecter le fil de la maison BLANC (neutre) avec: |
|-----------------------------------------------------------|----------------------------------------------------|
| Noir (Phase) | Blanc (neutre) |
| Fil parallèle (ronde et lisse) | Fil parallèle (carré ou striée) |
| Clair, Marron, Or ou Noir SANS traceur | Clair, Marron, or ou Noir AVEC traceur |
| Fil isolé (autre que Vert) avec conducteur Cuivre | Fil isolé (autre que Vert) avec conducteur Argent |

• CONNEXIONS ÉLECTRIQUES

1. Fixez le fil de terre (vert isolé ou cuivre nu) du circuit d'alimentation au support de montage par la vis vert de fixation de terre fourni.
2. Connectez le fil de mise à la terre du luminaire au conducteur de mise à la terre du circuit d'alimentation. Fixez tous les conducteurs de terre au support de montage avec la vis vert de fixation.
3. Connectez les fils noir et blanc en référant à la table connexion câbles

ATTENTION

Fil libre ou des connexions desserrées ne doivent pas être présents. Fixer avec des connecteurs de fils certifié UL et du ruban électrique.

• INSTALLATION FINALE


1. Installer des ampoules de puissance recommandée, reportez-vous à l'étiquette de remplacement de la lampe situé en proximité de la douille.
2. Ne pas dépasser la puissance recommandée

AVERTISSEMENT

Instructions supplémentaires

Pour la fixation, utiliser les vis fournies et vérifier que le pavillon couvre complètement la boîte de sortie.

En cas de changement d'article, pas autorisé précédemment, la certification UL se terminera immédiatement.

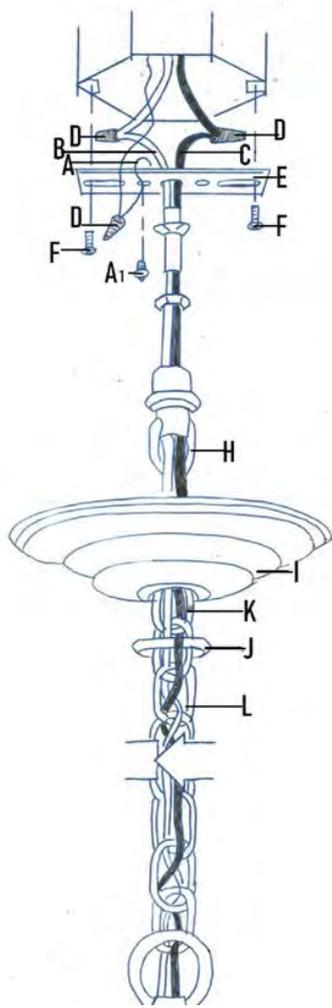

BONITA 2LTS WALL SCONCE #65636H0357

ARHAUS®

your home

parts enclosed:

- (B) Cross bar screws (2)
- (H) wire nuts (3)

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.
wattage: 2 x 40 W
type of socket: E12

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

- Disassemble metal box cover(C) and cross bar(A) from back of the sconce.
- Attach the cross bar(A) to the electrical box using the cross bar screws (B).
- Attach the metal box cover (C) to the cross bar (A) using the metal box cover screws (D).
- Attach the box of the sconce (E) to the metal box cover (C) using the screws (F).



See back of the page for wiring connection details


replacement parts assembly:

To replace the glass drops (L), (I) insert wire clip into the hole on the iron frame. Twist the wire to close loop and secure it in place.

care instructions:

Clean with dry soft cloth/brush only.
Do not use water/alcohol or any detergent.

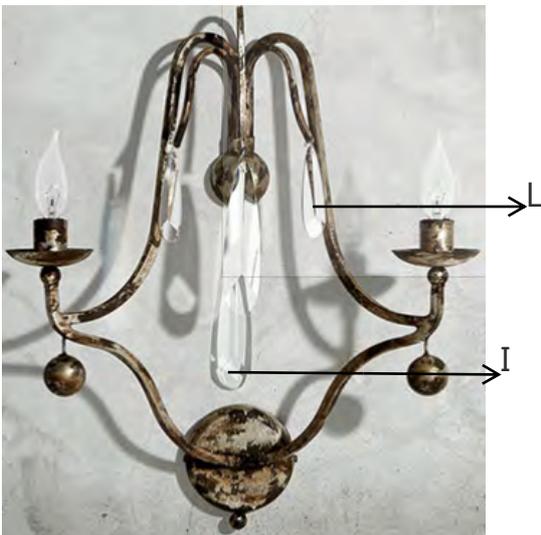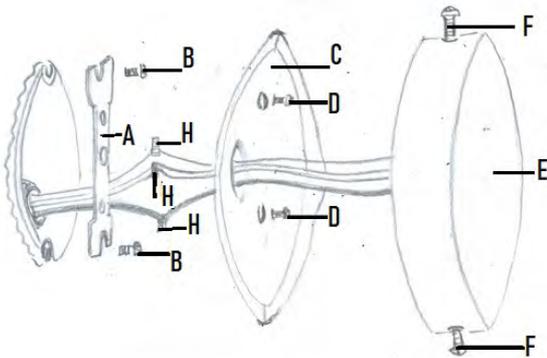

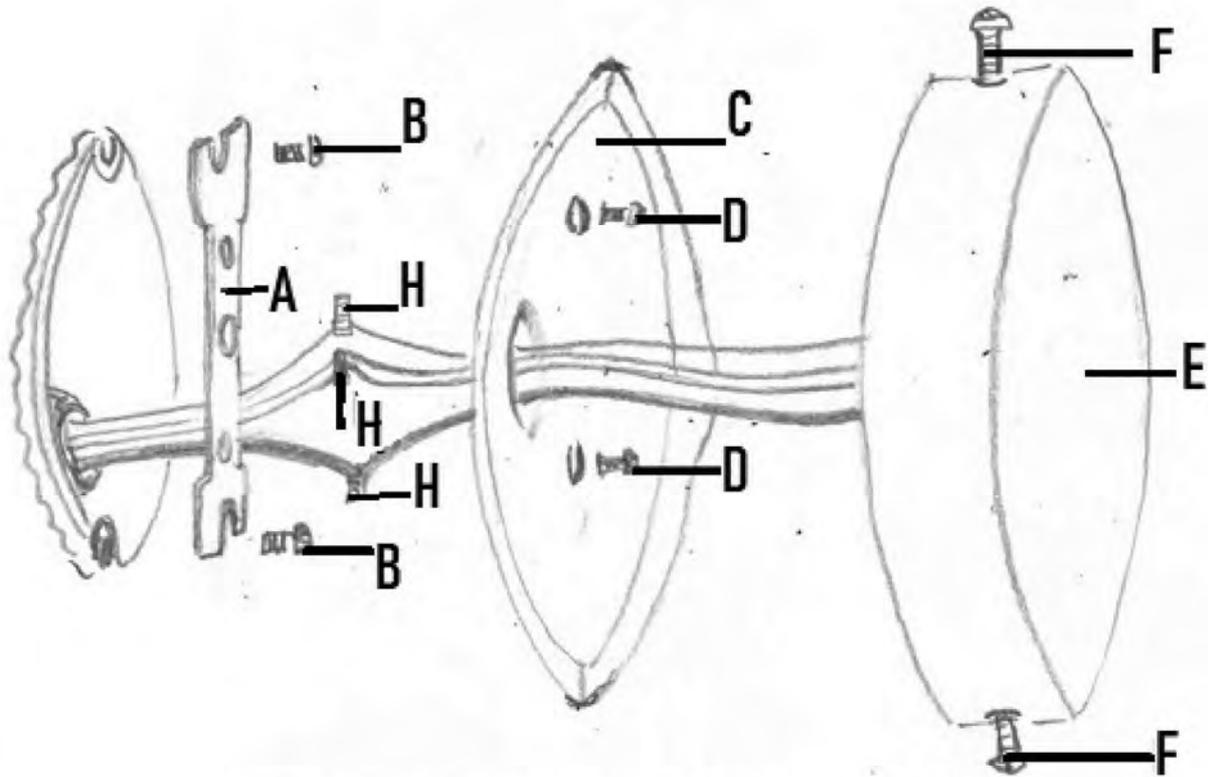

INSTALLATION INSTRUCTIONS

INCANDESCENT SURFACE MOUNTED LUMINAIRES:

CAUTION

- A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT MUST INSTALL THIS PRODUCT IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE AND THE HAZARDS INVOLVED.

WARNING

- The electricity MUST be turned off at the MAIN FUSE BOX before installation of this luminaire; turning the power off using the light switch is not sufficient to prevent electrical shock.
- Luminaires weighing 50 lbs (25 lbs for surface wall) or more must be mounted directly to the building structure, independently of the electrical box; this installation should not be made on a radiant heat type ceiling.

- If a chain-and-canopy luminaire is provided of an individual grounding conductor (bare or insulated), this shall be interwoven through the chain from the luminaire to the canopy.
- If chain-and-canopy luminaire is provided of a SPT-1 power supply cord type, this shall interwoven through the chain from the luminaire to the canopy.
- The luminaire are not intended to support external weight other than provided glasses.

- WIRE CONNECTION CHART:

| Connect Black or Red (Hot) House Wire to: | Connect White (Neutral) House Wire to: |
|---------------------------------------------------------|---------------------------------------------------------|
| Black (Hot) | White (Neutral) |
| Parallel cord (round and smooth) | Parallel cord (square or ridged) |
| Clear, Brown, Gold or Black without tracer | Clear, Brown, Gold or Black with tracer |
| Insulated wire (other than green) with copper conductor | Insulated wire (other than green) with silver conductor |

- ELECTRICAL CONNECTION:

- 1 Attach grounding wire (green insulated or bare copper) from the supply circuit to the mounting bracket with the green ground attachment screw provided. Connect the grounding wire of the luminaire to the grounding conductor of the supply circuit. Attach all grounding conductors to the mounting bracket with the green ground wire attachment screw.
- 2 Referring to the Wire Connection Chart, connect the black and white wires.

CAUTION

No loose strands or loose connections should be present. Secure with U.L. certified wire connectors and electrical tape.

- FINAL INSTRUCTION:

- 1 Install light bulbs, refer to the relamping label located near the lampholder for recommended wattage. DO NOT EXCEED THE RECOMMENDED WATTAGE.
- 2 Restore electricity and check the operation of the luminaire.

In case of change of the article, not previously authorized, the UL Certification will be terminated immediately

NOTICE DE MONTAGE PLAFONNIERES INCANDESCENTS ATTENTION

- Le montage doit être effectué par personnes compétentes selon le code d'installation en vigueur et les risques impliqués.
- La sûreté de l'installation est soumise au correct usage des instructions suivantes

AVERTISSEMENT

- Avant d'effectuer chaque opération, couper le courant à la boîte du fusible principale. La mise hors tension grâce à l'interrupteur n'est pas suffisante pour prévenir les chocs électriques.
- Luminaires qui sont lourds 50 Lbs. Ou plus (25 Lbs. Pour appareil mur) doivent être montés directement à la structure du bâtiment, de façon indépendante de la boîte électrique; cette installation ne doit pas être fait sur un plafond avec systèmes de chauffages radiants
- Dans le cas du luminaire avec chaîne et pavillon, il faut passé les câbles a travers les maillons de la chaîne, soit s'il est équipé avec un câble conducteur de mise à la terre individuelle (nu ou isolé), soit s'il est équipé avec un câble d'alimentation SPT-1.
- Les appareils ne devraient pas porte plus de poids que celle prévue pour les verres décoratif

• TABLE CONNEXION CABLES:

| Connecter le fil de la maison NOIR ou ROUGE (phase) avec: | Connecter le fil de la maison BLANC (neutre) avec: |
|-----------------------------------------------------------|----------------------------------------------------|
| Noir (Phase) | Blanc (neutre) |
| Fil parallèle (ronde et lisse) | Fil parallèle (carré ou striée) |
| Clair, Marron, Or ou Noir SANS traceur | Clair, Marron, or ou Noir AVEC traceur |
| Fil isolé (autre que Vert) avec conducteur Cuivre | Fil isolé (autre que Vert) avec conducteur Argent |

• CONNEXIONS ÉLECTRIQUES

1. Fixez le fil de terre (vert isolé ou cuivre nu) du circuit d'alimentation au support de montage par la vis vert de fixation de terre fourni.
2. Connectez le fil de mise à la terre du luminaire au conducteur de mise à la terre du circuit d'alimentation. Fixez tous les conducteurs de terre au support de montage avec la vis vert de fixation.
3. Connectez les fils noir et blanc en référant à la table connexion câbles

ATTENTION

Fil libre ou des connexions desserrées ne doivent pas être présents. Fixer avec des connecteurs de fils certifié UL et du ruban électrique.

• INSTALLATION FINALE

- 1 Installer des ampoules de puissance recommandée, reportez-vous à l'étiquette de remplacement de la lampe situé en proximité de la douille.
2. Ne pas dépasser la puissance recommandée

AVERTISSEMENT

Instructions supplémentaires

Pour la fixation, utiliser les vis fournies et vérifier que le pavillon couvre complètement la boîte de sortie.



En cas de changement d'article, pas autorisé précédemment, la certification UL se terminera immédiatement.

Parts Inventory

| Super Category | Product ID | Description | Stat | Collection | Route |
|----------------|--------------|------------------------------------------------------------------|------|------------|-------|
| LIGHTING | 91636H358CN | BONITA 12.5 CM CANOPY SILVER CLAY CANOPY W/ HARDWARE | A | PT-BONITA | PART |
| LIGHTING | 91636H155CN | BONITA 14.5 CM CANOPY SILVER CLAY CANOPY W/ HARDWARE | A | PT-BONITA | PART |
| LIGHTING | 91636H358CH | BONITA 3 MM 12 FT CHAIN 3 MM X 3.7 MT SLVR CLY CHAIN | A | PT-BONITA | PART |
| LIGHTING | 91636H358CH6 | BONITA 3 MM 6 FT CHAIN 3 MM X 1.8 MT SLVR CLY CHAIN | A | PT-BONITA | PART |
| LIGHTING | 91636H155CH | BONITA 5 MM 12 FT CHAIN 5 MM X 3.7 MT SILVER CLAY CHAIN | A | PT-BONITA | PART |
| LIGHTING | 91636H155CH6 | BONITA 5 MM 6 FT CHAIN 5 MM X 1.8 MT SLVR CLY CHAIN | A | PT-BONITA | PART |
| LIGHTING | 91636BONCRL | BONITA LARGE CRYSTAL 150 MM GLASS CRYSTAL W/ SILVER | A | PT-BONITA | PART |
| LIGHTING | 91636H110CH | BONITA SILVER CHAND 12 FT CHN 12FT IVORY SILV FINISH CHN 5MM | A | PT-BONITA | PART |
| LIGHTING | 91636H110CH6 | BONITA SILVER CHAND 6 FT CHAIN 6 FT IVORY SILV FINISH CHN 5MM | A | PT-BONITA | PART |
| LIGHTING | 91636H110CN | BONITA SILVER CHAND CANOPY IVORY SILVER LG CANOPY W/ HRDW | A | PT-BONITA | PART |
| LIGHTING | 91636BONCRS | BONITA SMALL CRYSTAL 80 MM GLASS CRYSTAL W/ SILVER | A | PT-BONITA | PART |

663507H650 BREA BRASS WALL SCONCE**parts enclosed:**

- A. Marble Plaques (11)
- B. Fixture Body (1)

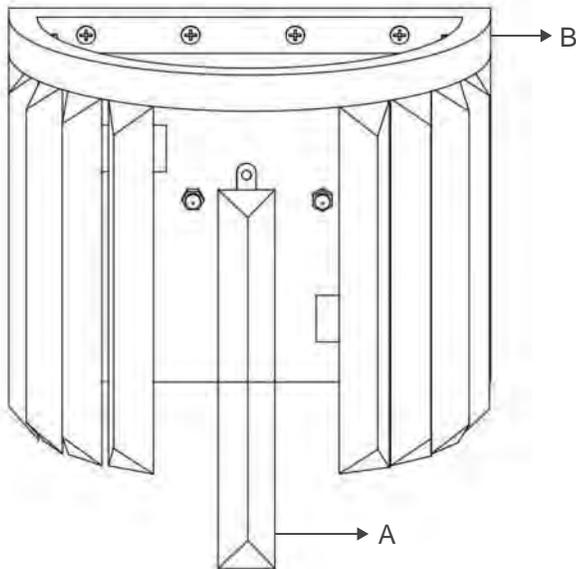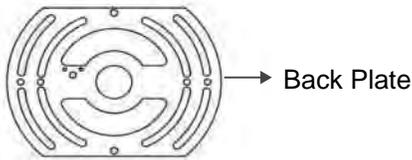**important safety instructions:**

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

UL NO:E491659, UL RATING: DRY, MAX BULB WATTAGE: 2X40W
 CONVERSION TO MAX LED WATTAGE: 6W
 BULB: 2 X B-10 (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings.
2. Turn OFF power to the circuit breaker where the wall sconce be installed.
3. Remove back plate from base & fix it onto wall with screws.
4. After fixing back plate onto outlet, fix the wall sconce through base.
5. Hang marble plaques (A) as shown in image (B).
6. Insert bulb B-10. Do Not exceed specified wattage.
7. Restore power to the circuit breaker and test wall sconce.

care instructions:

DO NOT use polishes or Cleaners on your lamp. Wipe with soft, lint free cloth.

parts enclosed:

| QTY | Part | Letter |
|-----|------------|--------|
| 1 | Finial | A |
| 1 | Harp (top) | B |
| 1 | Harp | C |
| 2 | Harp caps | D |
| 1 | Socket | E |
| 1 | Saddle | F |
| 1 | Shade | G |

important safety instructions:

It is important that it is read carefully and completely before assembling the fixture. To avoid risk of fire, do not exceed the recommended wattage.

to assemble:


1. Remove all packing contents and parts from the carton(s) carefully
2. Please be sure you have all parts indicated before you begin assembly.
3. Insert the harp (C) into the saddle (F) and lower the two harp caps (D) until they cover the two pronged saddle.
4. Unscrew the finial (A) from the harp top (B). Place shade (G) over the assembled harp, making sure the top of the harp extends through the hole at the top of the shade. Attached the finial (A) and tighten to secure the shade.
5. Insert correct bulb (not included) into the socket (E).

Do not exceed specified wattage.

care instructions:

1. Wipe clean with a soft, dry cloth or static duster.
2. Always avoid the use of chemicals or abrasive cleaners as they may cause damage to finish on the lamp.

Made in India

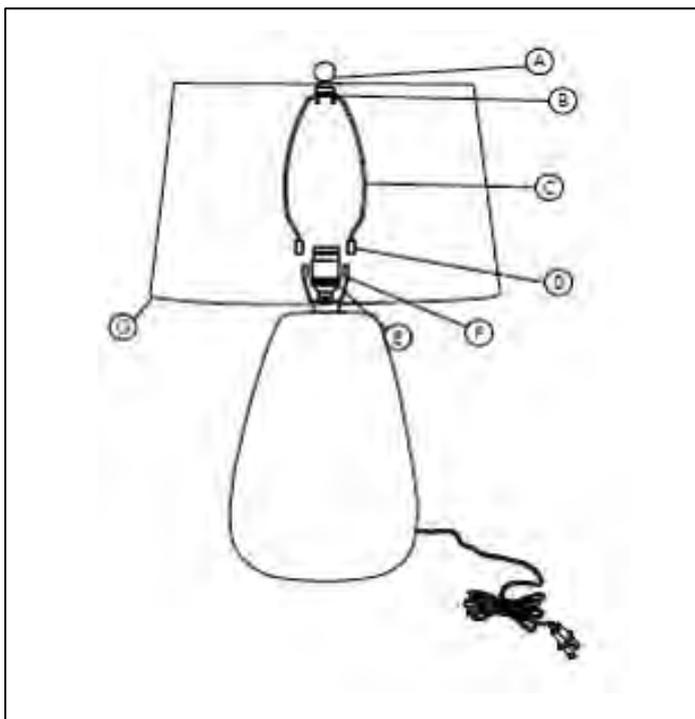

CABELLO PENDANT (L) - ASSEMBLY INSTRUCTIONS

PARTS ENCLOSED:

- | | |
|---------------------------|--------------------|
| (A) Cross Bar | (G) Collar |
| (B) Cross Bar Screws (X2) | (H) Chain |
| (C) Threaded Tube | (I) Quick Link |
| (D) Hang Straight | (J) Loop |
| (E) Quick Link | (K) Socket (x3) |
| (F) Canopy | (L) Wire Nuts (x3) |

IMPORTANT SAFETY INSTRUCTIONS:

1. These instructions are provided for your safety. It is very important that they are read carefully and completely before assembling and installing the lighting fixture.
2. We strongly recommend that a professional electrician install all direct wire fixtures.
3. This product must be installed in accordance with the applicable installation codes by a professional familiar with the construction and operation of the product and the hazards involved.
4. The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with ground wire or equivalent protection system).
5. This fixture has been rated for up to three (3) 60-watt maximum, TYPE A, medium base lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:


1. To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing lightbulbs.
2. Do not touch bulbs when fixture is turned on. Do not look directly at lit bulbs.
3. Keep flammable materials away from lit bulbs.

TO ASSEMBLE:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/ CIRCUIT BREAKER.
2. Remove all parts carefully from the carton. Do not throw away any parts.
3. Remove hang straight (D) from chain (H) by detaching quick link (E) from chain (H), while keeping cross bar (A), threaded tube (C), canopy (F), and collar (G) together.
4. Measure desired drop for fixture to hang and add/remove chain links (H) with chain break tool (not included). Reattach quick link (E) to the top chain link (H).
5. Unthread collar (G) from hang straight (D), and carefully slide it down chain (H) so it rests on top of loop (J).
6. Slide canopy (F) down chain (H) so it rests on top of loop (J).
7. Affix cross bar (A) (with threaded tube (C) and hangstraight (D) attached) to ceiling outlet box using cross bar screws (B) provided.
8. Lift fixture to ceiling and secure quick link (E) to hang straight (D). Guide the wire exiting the fixture through the center of collar (G) and canopy (F). Continue to guide the wire through chain (H), quick link (E), and through the center of hang straight (D) and threaded tube (C).
9. Cut the cord to the desired length to make electrical connections. At least 8" of wire will be needed to make proper electrical connections.
10. Make proper electrical connections described in steps 11 - 13. A LICENSED ELECTRICIAN IS RECOMMENDED.
11. Attach ground wire from the fixture (green or copper in color) to the ground wire in outlet box. Fasten wires together with wire nut (L) and tightly wrap connection with electrical tape.
12. Attach hot wire from fixture (black in color, or smooth side of wire) to hot wire from ceiling outlet box. Fasten wires together with wire nut (L) and tightly wrap connection with electrical tape.
13. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from ceiling outlet box. Fasten wires together with wire nut (L) and tightly wrap connection with electrical tape.
14. Gently push wire connections back into ceiling outlet box. Slide canopy (F) up chain (H) and hold firmly against ceiling. Slide collar (G) up chain (H) and thread onto hang straight (D), securing canopy (F) against ceiling.
15. Insert three (3) 60-watt maximum, Type A, medium base bulbs (not included) into the sockets.
16. Reconnect main electrical supply at fuse box/ circuit breaker and test the fixture.

CARE INSTRUCTIONS:

1. Wipe clean with a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.

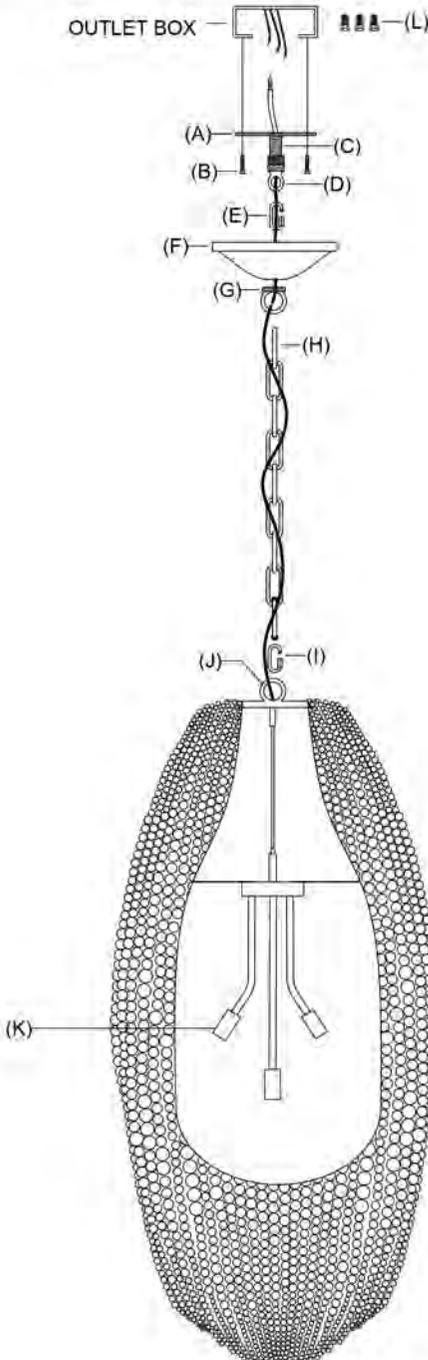

CABELLO PENDANT (M) - ASSEMBLY INSTRUCTIONS

PARTS ENCLOSED:

- | | |
|---------------------------|--------------------|
| (A) Cross Bar | (G) Collar |
| (B) Cross Bar Screws (X2) | (H) Chain |
| (C) Threaded Tube | (I) Quick Link |
| (D) Hang Straight | (J) Loop |
| (E) Quick Link | (K) Socket (x3) |
| (F) Canopy | (L) Wire Nuts (x3) |

IMPORTANT SAFETY INSTRUCTIONS:

1. These instructions are provided for your safety. It is very important that they are read carefully and completely before assembling and installing the lighting fixture.
2. We strongly recommend that a professional electrician install all direct wire fixtures.
3. This product must be installed in accordance with the applicable installation codes by a professional familiar with the construction and operation of the product and the hazards involved.
4. The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with ground wire or equivalent protection system).
5. This fixture has been rated for up to three (3) 60-watt maximum, TYPE A, medium base lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:


1. To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing lightbulbs.
2. Do not touch bulbs when fixture is turned on. Do not look directly at lit bulbs.
3. Keep flammable materials away from lit bulbs.

TO ASSEMBLE:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/ CIRCUIT BREAKER.
2. Remove all parts carefully from the carton. Do not throw away any parts.
3. Remove hang straight (D) from chain (H) by detaching quick link (E) from chain (H), while keeping cross bar (A), threaded tube (C), canopy (F), and collar (G) together.
4. Measure desired drop for fixture to hang and add/remove chain links (H) with chain break tool (not included). Reattach quick link (E) to the top chain link (H).
5. Unthread collar (G) from hang straight (D), and carefully slide it down chain (H) so it rests on top of loop (J).
6. Slide canopy (F) down chain (H) so it rests on top of loop (J).
7. Affix cross bar (A) (with threaded tube (C) and hangstraight (D) attached) to ceiling outlet box using cross bar screws (B) provided.
8. Lift fixture to ceiling and secure quick link (E) to hang straight (D). Guide the wire exiting the fixture through the center of collar (G) and canopy (F). Continue to guide the wire through chain (H), quick link (E), and through the center of hang straight (D) and threaded tube (C).
9. Cut the cord to the desired length to make electrical connections. At least 8" of wire will be needed to make proper electrical connections.
10. Make proper electrical connections described in steps 11 - 13. A LICENSED ELECTRICIAN IS RECOMMENDED.
11. Attach ground wire from the fixture (green or copper in color) to the ground wire in outlet box. Fasten wires together with wire nut (L) and tightly wrap connection with electrical tape.
12. Attach hot wire from fixture (black in color, or smooth side of wire) to hot wire from ceiling outlet box. Fasten wires together with wire nut (L) and tightly wrap connection with electrical tape.
13. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from ceiling outlet box. Fasten wires together with wire nut (L) and tightly wrap connection with electrical tape.
14. Gently push wire connections back into ceiling outlet box. Slide canopy (F) up chain (H) and hold firmly against ceiling. Slide collar (G) up chain (H) and thread onto hang straight (D), securing canopy (F) against ceiling.
15. Insert three (3) 60-watt maximum, Type A, medium base bulbs (not included) into the sockets.
16. Reconnect main electrical supply at fuse box/ circuit breaker and test the fixture.

CARE INSTRUCTIONS:


1. Wipe clean with a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.

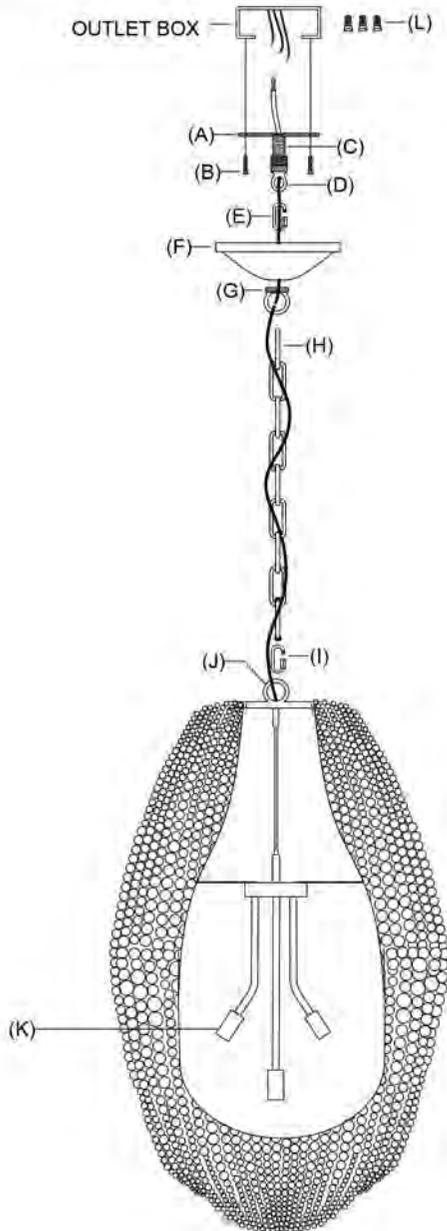

CABELLO PENDANT (S) - ASSEMBLY INSTRUCTIONS

PARTS ENCLOSED:

- | | |
|---------------------------|--------------------|
| (A) Cross Bar | (G) Collar |
| (B) Cross Bar Screws (X2) | (H) Chain |
| (C) Threaded Tube | (I) Quick Link |
| (D) Hang Straight | (J) Loop |
| (E) Quick Link | (K) Socket (x1) |
| (F) Canopy | (L) Wire Nuts (x3) |

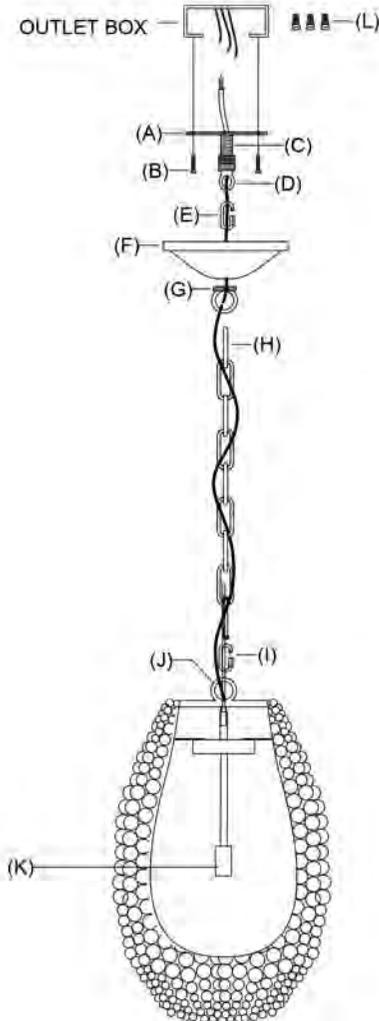

IMPORTANT SAFETY INSTRUCTIONS:

1. These instructions are provided for your safety. It is very important that they are read carefully and completely before assembling and installing the lighting fixture.
2. We strongly recommend that a professional electrician install all direct wire fixtures.
3. This product must be installed in accordance with the applicable installation codes by a professional familiar with the construction and operation of the product and the hazards involved.
4. The lighting fixture is meant for indoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with ground wire or equivalent protection system).
5. This fixture has been rated for up to one (1) 60-watt maximum, TYPE A, medium base lightbulbs. To avoid the risk of fire, do not exceed the recommended wattage.

WARNINGS:

1. To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing lightbulbs.
2. Do not touch bulbs when fixture is turned on. Do not look directly at lit bulbs.
3. Keep flammable materials away from lit bulbs.

TO ASSEMBLE:


1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/ CIRCUIT BREAKER.
2. Remove all parts carefully from the carton. Do not throw away any parts.
3. Remove hang straight (D) from chain (H) by detaching quick link (E) from chain (H), while keeping cross bar (A), threaded tube (C), canopy (F), and collar (G) together.
4. Measure desired drop for fixture to hang and add/remove chain links (H) with chain break tool (not included). Reattach quick link (E) to the top chain link (H).
5. Unthread collar (G) from hang straight (D), and carefully slide it down chain (H) so it rests on top of loop (J).
6. Slide canopy (F) down chain (H) so it rests on top of loop (J).
7. Affix cross bar (A) (with threaded tube (C) and hangstraight (D) attached) to ceiling outlet box using cross bar screws (B) provided.
8. Lift fixture to ceiling and secure quick link (E) to hang straight (D). Guide the wire exiting the fixture through the center of collar (G) and canopy (F). Continue to guide the wire through chain (H), quick link (E), and through the center of hang straight (D) and threaded tube (C).
9. Cut the cord to the desired length to make electrical connections. At least 8" of wire will be needed to make proper electrical connections.
10. Make proper electrical connections described in steps 11 - 13. A LICENSED ELECTRICIAN IS RECOMMENDED.
11. Attach ground wire from the fixture (green or copper in color) to the ground wire in outlet box. Fasten wires together with wire nut (L) and tightly wrap connection with electrical tape.
12. Attach hot wire from fixture (black in color, or smooth side of wire) to hot wire from ceiling outlet box. Fasten wires together with wire nut (L) and tightly wrap connection with electrical tape.
13. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from ceiling outlet box. Fasten wires together with wire nut (L) and tightly wrap connection with electrical tape.
14. Gently push wire connections back into ceiling outlet box. Slide canopy (F) up chain (H) and hold firmly against ceiling. Slide collar (G) up chain (H) and thread onto hang straight (D), securing canopy (F) against ceiling.
15. Insert one (1) 60-watt maximum, Type A, medium base bulbs (not included) into the sockets.
16. Reconnect main electrical supply at fuse box/ circuit breaker and test the fixture.

CARE INSTRUCTIONS:


1. Wipe clean with a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.

parts enclosed:

| Part | Description | Qty. | Part | Description | Qty. |
|------|------------------|------|------|----------------------|------|
| A | screws | 2 | F | rods #F | 4 |
| B | mounting bracket | 1 | G | screw nipple #G | 1 |
| C | nipples | 3 | H | selenite plaques # H | 30 |
| D | canopy | 1 | I | selenite plaques # I | 15 |
| E | rods #E | 1 | J | hooks | 45 |

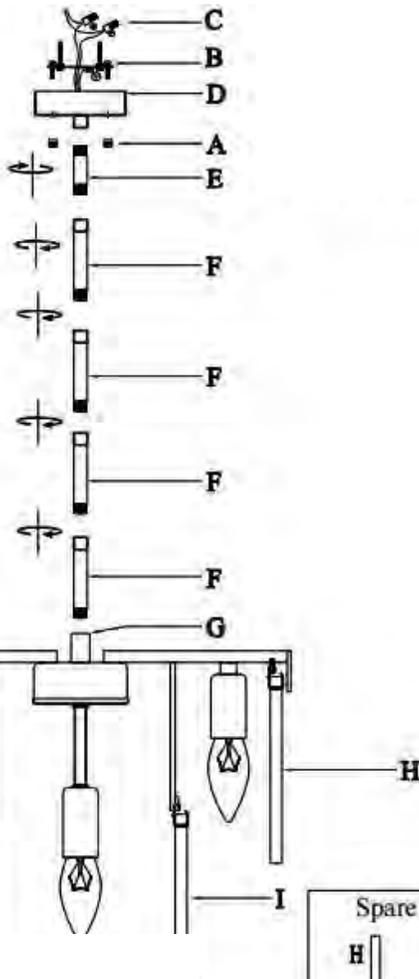

D3214-4

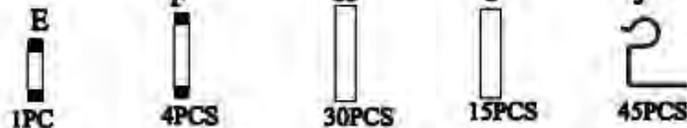

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.
5. Natural Selenite is a soft, brittle stone. Due to its fragile quality, please handle this product with care. It is normal for some debris to occur during the unboxing and installation this chandelier. Please use a soft, dry cloth to remove any debris.

to assemble:




1. Carefully remove all parts from the box.
2. Remove the mounting bracket (B) from the canopy (D) by loosening the screws (A).
3. According the height you need to decide how many rods (E)/(F) needed, and then put the cable through the rods till through the canopy (D) when install the rods (E)/(F) on the screw nipple (G).
4. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
5. Affix the mounting bracket (B) on the outlet box.
6. Hold the lamp body and wrap both safety cables with nipples (C), push the cable into the outlet box, and then attach the canopy (D) to the mounting bracket (B) and secure with screws (A).
7. Install the bulbs (NOT INCLUDING) on the sockets.
8. Install the selenite plaques (I) in the bottom ring and then install the selenite plaques (H) in the top ring with the hooks (J) according to the illustration.
9. Installation is complete, turn on power at fuse or circuit breaker.

care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

parts enclosed:

| Part | Description | Qty. | Part | Description | Qty. |
|------|------------------|------|------|----------------------|------|
| A | screws | 2 | F | rods #F | 4 |
| B | mounting bracket | 1 | G | screw nipple #G | 1 |
| C | nipples | 3 | H | selenite plaques # H | 39 |
| D | canopy | 1 | I | selenite plaques # I | 36 |
| E | rods #E | 1 | J | hooks | 75 |

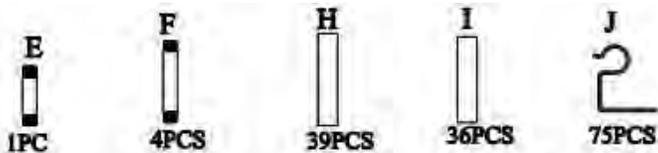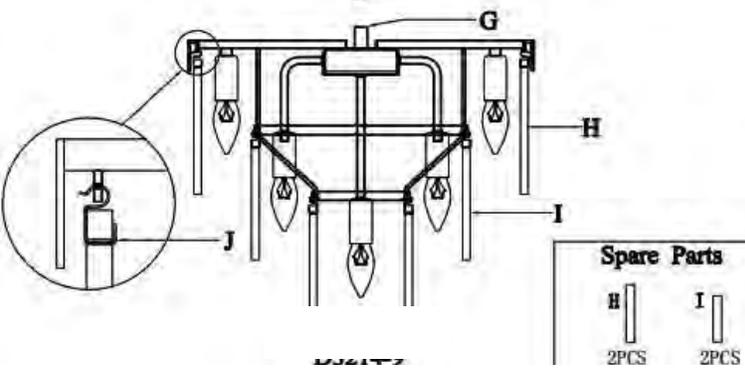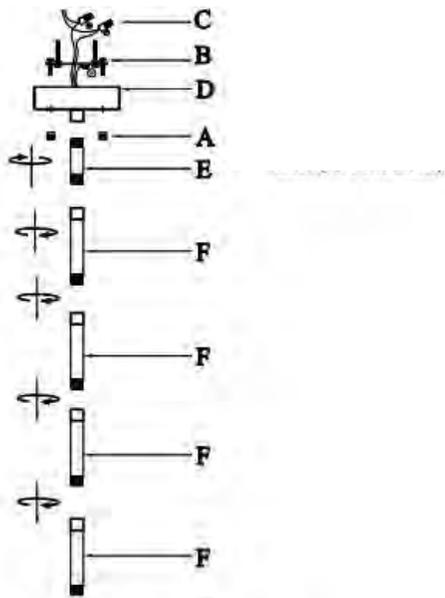

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.
5. Natural Selenite is a soft, brittle stone. Due to its fragile quality, please handle this product with care. It is normal for some debris to occur during the unboxing and installation this chandelier. Please use a soft, dry cloth to remove any debris.

to assemble:


1. Carefully remove all parts from the box.
2. Remove the mounting bracket (B) from the canopy (D) by loosening the screws (A).
3. According the height you need to decide how many rods (E)/(F) needed, and then put the cable through the rods till through the canopy (D) when install the rods (E)/(F) on the screw nipple (G).
4. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
5. Affix the mounting bracket (B) on the outlet box.
6. Hold the lamp body and wrap both safety cables with nipples (C), push the cable into the outlet box, and then attach the canopy (D) to the mounting bracket (B) and secure with screws (A).
7. Install the bulbs (NOT INCLUDING) on the sockets.
8. Install the selenite plaques (I) in the bottom and middle rings and then install the selenite plaques (H) in the top ring with the hooks (J) according to the illustration.
9. Installation is complete, turn on power at fuse or circuit breaker.

care instructions:


Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

parts enclosed:

| Part | Description | Qty. | Part | Description | Qty. |
|------|------------------|------|------|----------------------|------|
| A | screws | 2 | F | rods #F | 4 |
| B | mounting bracket | 1 | G | screw nipple #G | 1 |
| C | nipples | 3 | H | selenite plaques # H | 60 |
| D | canopy | 1 | I | selenite plaques # I | 90 |
| E | rods #E | 1 | J | hooks | 150 |

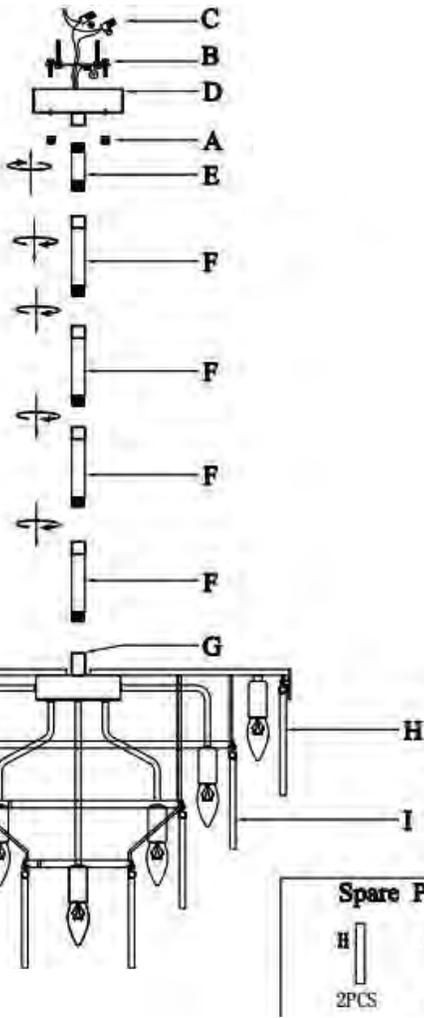

Spare Parts



important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.
3. Chandeliers weighing more than 50 lbs. cannot be mounted alone to a standard outlet box and require additional bracing above the ceiling where they are to be installed. Professional installation is required.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.
5. Natural Selenite is a soft, brittle stone. Due to its fragile quality, please handle this product with care. It is normal for some debris to occur during the unboxing and installation this chandelier. Please use a soft, dry cloth to remove any debris.

to assemble:

1. Carefully remove all parts from the box.
2. Remove the mounting bracket (B) from the canopy (D) by loosening the screws (A).
3. According the height you need to decide how many rods (E)/(F) needed, and then put the cable through the rods till through the canopy (D) when install the rods (E)/(F) on the screw nipple (G).
4. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
5. Affix the mounting bracket (B) on the outlet box.
6. Hold the lamp body and wrap both safety cables with nipples (C), push the cable into the outlet box, and then attach the canopy (D) to the mounting bracket (B) and secure with screws (A).
7. Install the bulbs (NOT INCLUDING) on the sockets.
8. Install the selenite plaques (I) in the rings from bottom to the 3rd and then install the selenite plaques (H) in the top ring with the hooks (J) according to the illustration.
9. Installation is complete, turn on power at fuse or circuit breaker.

care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

parts enclosed:

| Part | Description | Qty. | Part | Description | Qty. |
|------|------------------|------|------|----------------------|------|
| A | nipples | 3 | G | rods #G | 8 |
| B | screws # B | 2 | H | screw nipple #H | 2 |
| C | mounting bracket | 1 | I | hooks | 156 |
| D | canopy | 1 | J | selenite plaques # J | 90 |
| E | screws # E | 2 | K | selenite plaques # K | 66 |
| F | rods #F | 2 | | | |

important safety instructions:



1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.
3. Chandeliers weighing more than 50 lbs. cannot be mounted alone to a standard outlet box and require additional bracing above the ceiling where they are to be installed. Professional installation is required.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.
5. Natural Selenite is a soft, brittle stone. Due to its fragile quality, please handle this product with care. It is normal for some debris to occur during the unboxing and installation this chandelier. Please use a soft, dry cloth to remove any debris.

to assemble:

1. Carefully remove all parts from the box.
2. Remove the mounting bracket (C) from the rectangular canopy (D) by loosening the screws (E).
3. According to the height you need to decide how many rods (F)/(G) needed, and then put the cable through the rods till through the canopy (D) when install the rods (F)/(G) on the screw nipples (H).
4. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
5. Affix the mounting bracket (C) on the outlet box with screws (B).
6. Hold the lamp body and wrap both safety cables with nipples (A), push the cable into the outlet box.
7. Attach the rectangular canopy (D) to the mounting bracket (C) and secure with the side screws (E) again.
8. Install the bulbs (NOT INCLUDING) on the sockets.
9. Install the selenite plaques (K) in the bottom ring and then install the selenite plaques (J) in the top ring with the hooks (I) according to the illustration.
10. Installation is complete, turn on power at fuse or circuit breaker.

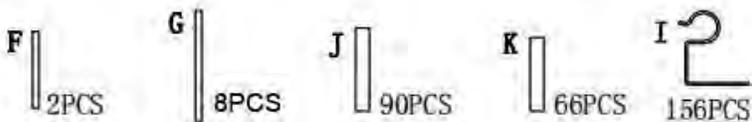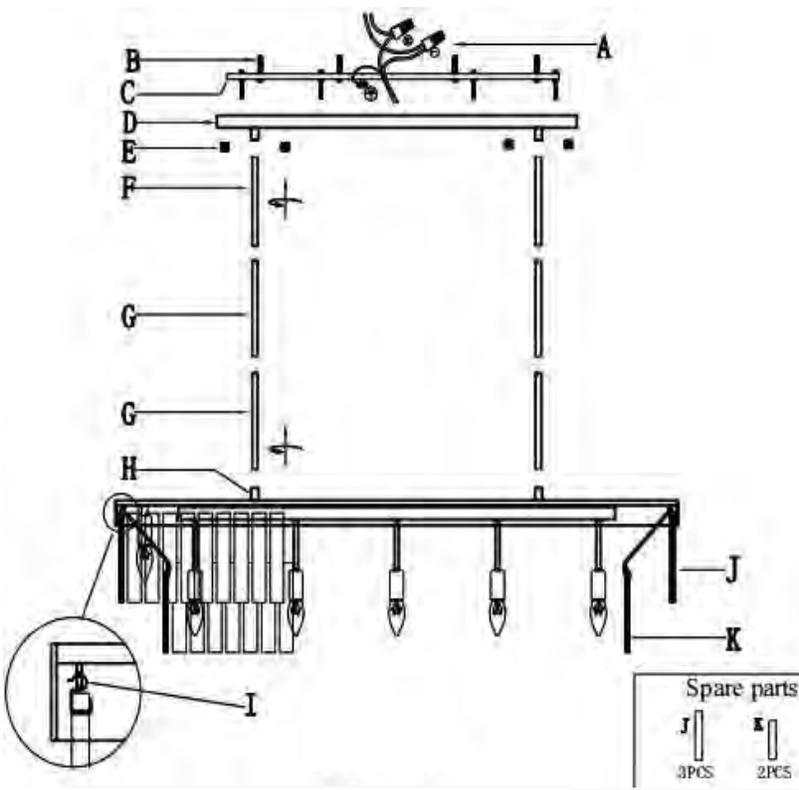

care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

parts enclosed:

| Part | Description | Qty. | Part | Description | Qty. |
|------|------------------|------|------|----------------------|------|
| A | nipples | 3 | G | rods #G | 8 |
| B | screws # B | 2 | H | screw nipple #H | 2 |
| C | mounting bracket | 1 | I | hooks | 184 |
| D | canopy | 1 | J | selenite plaques # J | 104 |
| E | screws # E | 2 | K | selenite plaques # K | 80 |
| F | rods #F | 2 | | | |

important safety instructions:



1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.
3. Chandeliers weighing more than 50 lbs. cannot be mounted alone to a standard outlet box and require additional bracing above the ceiling where they are to be installed. Professional installation is required.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.
5. Natural Selenite is a soft, brittle stone. Due to its fragile quality, please handle this product with care. It is normal for some debris to occur during the unboxing and installation this chandelier. Please use a soft, dry cloth to remove any debris.

to assemble:

1. Carefully remove all parts from the box.
2. Remove the mounting bracket (C) from the rectangular canopy (D) by loosening the screws (E).
3. According to the height you need to decide how many rods (F)/(G) needed, and then put the cable through the rods till through the canopy (D) when install the rods (F)/(G) on the screw nipples (H).
4. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
5. Affix the mounting bracket (C) on the outlet box with screws (B).
6. Hold the lamp body and wrap both safety cables with nipples (A), push the cable into the outlet box.
7. Attach the rectangular canopy (D) to the mounting bracket (C) and secure with the side screws (E) again.
8. Install the bulbs (NOT INCLUDING) on the sockets.
9. Install the selenite plaques (K) in the bottom ring and then install the selenite plaques (J) in the top ring with the hooks (I) according to the illustration.
10. Installation is complete, turn on power at fuse or circuit breaker.

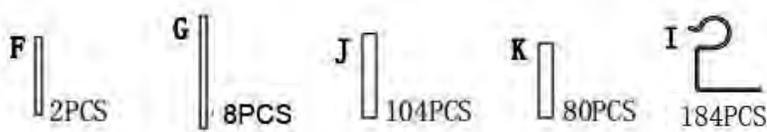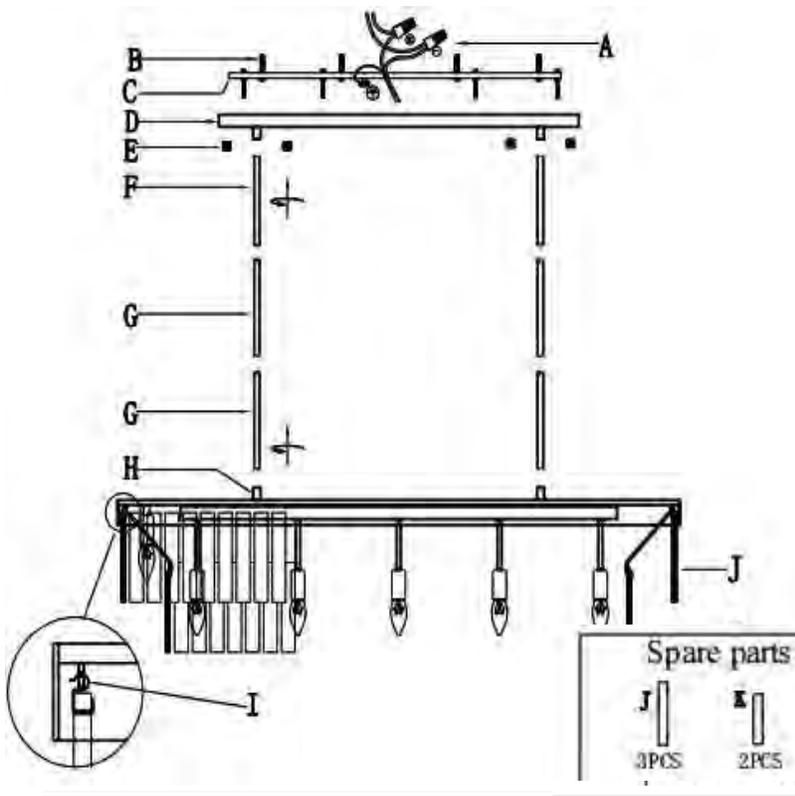


care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

parts enclosed:

| Part | Description | Qty. |
|------|----------------------|------|
| A | screws # A | 2 |
| B | bracket | 1 |
| C | screws # C | 2 |
| D | nipples | 3 |
| E | safety cable | 1 |
| F | selenite plaques # F | 15 |
| G | selenite plaques # G | 7 |
| H | hooks | 22 |

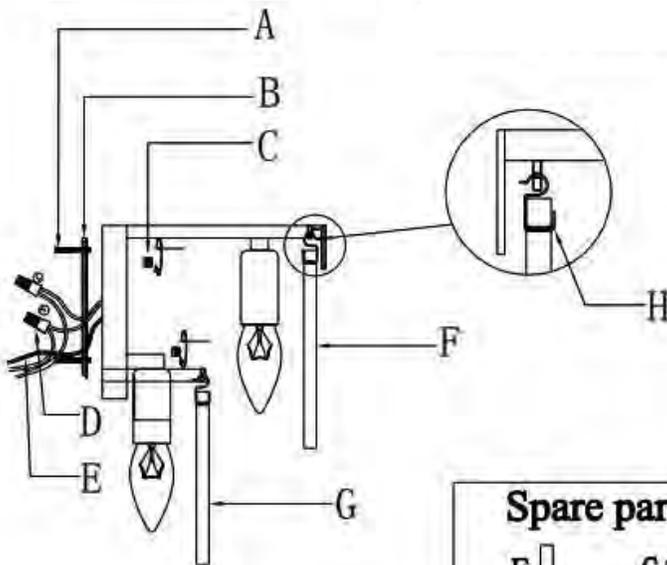

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.
5. Natural Selenite is a soft, brittle stone. Due to its fragile quality, please handle this product with care. It is normal for some debris to occur during the unboxing and installation this chandelier. Please use a soft, dry cloth to remove any debris.

to assemble:



1. Carefully remove all parts from the box.
2. Remove the mounting bracket (B) from the base by loosening the screws (C).
3. Affix the mounting bracket (B) on the outlet box with the screws (A).
4. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
5. Wrap both safety cables (E) with nipples (D), push the base on the bracket (B) and then affix it with screws (C).
6. Install the bulbs (NOT INCLUDING) on the sockets and then put the selenite plaques (F) / (G) on the lamp body from inside layer to outside layer.
7. Installation is complete, turn on power at fuse or circuit breaker.

care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

parts enclosed:

| Part | Description | Qty. | Part | Description | Qty. |
|------|------------------|------|------|-----------------------|------|
| A | lock collar | 1 | H | cable | 1 |
| B | mounting bracket | 1 | I | naked earth cable | 1 |
| C | nipples | 3 | J | ceiling loop | 1 |
| D | canopy | 1 | K | sea shell clusters #K | 48 |
| E | chain | 1 | L | sea shell clusters #L | 34 |
| F | open ring #F | 1 | M | sea shell clusters #M | 23 |
| G | open ring #G | 1 | | | |

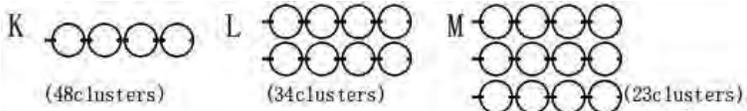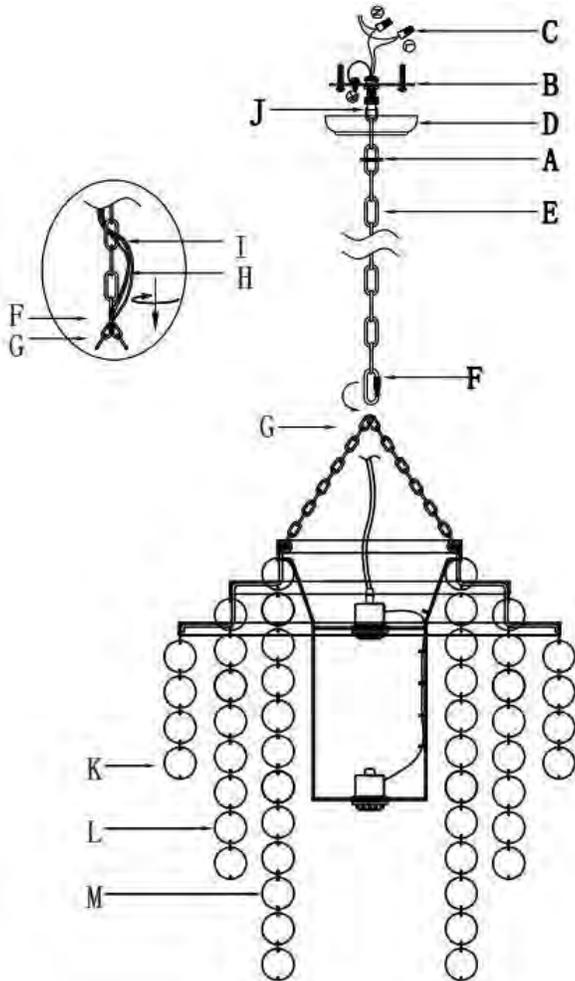

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box.
2. Remove the mounting bracket (B) from the canopy (D) by loosening the lock collar (A).
3. Taking off the open ring (F) and use the dimensions of the fixture as a guide, shorten the chain as needed using a pair of chain pliers.
4. Use the open ring (F) to link the chain (E) and the open ring (G), then put the cable (H) and naked earth cable (I) through the chain (E) in every 3-4 rings until through the ceiling loop (J).
5. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
6. Affix the mounting bracket (B) on the outlet box.
7. Wrap both safety cable with nipples (C), push the cable into the outlet box.
8. Attach the canopy (D) to the mounting bracket (B) and secure with lock collar (A).
9. Install the bulbs on the sockets.
10. Install the sea shell clusters (K)/ (L)/ (M) in the right places according to the illustration.
11. Installation is complete, turn on power at fuse or circuit breaker.

care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

Carraway Chandelier

ARHAUS®

your home

parts enclosed:

| | | |
|---|--------------------------|----|
| A | Wire Connector | 3 |
| B | Mounting Bracket | 1 |
| C | Mounting Screw | 2 |
| D | Ground Screw | 1 |
| E | Canopy | 1 |
| F | Hex Nut | 2 |
| G | Nipple | 1 |
| H | Lock Washer | 1 |
| I | Screw Collar Loop | 1 |
| J | Threaded Ring | 1 |
| K | Chain | 1 |
| L | Fixture Loop | 1 |
| M | Quick Link | 6 |
| N | Decorative Hanging Chain | 3 |
| O | Chandelier Body | 1 |
| P | Decorative Glass Disc | 99 |

cautions:

BEFORE INSTALLING CHANDELIER, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.

important safety instructions:

1. This chandelier is meant for indoor use, DRY LOCATIONS ONLY.
2. Do not use the electric cord to support the weight of the chandelier.
3. These instructions are provided for your safety. It is important that they are read carefully and completely before beginning the installation of this lighting fixture.
4. For your safety, it is strongly recommended that two people install the lighting fixture.
5. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
6. **Save these instructions.**


warnings:

1. To reduce the risk of fire, electrical shock or personal injury, always turn off the chandelier and allow it to cool prior to replacing light bulbs.
2. Do not touch the bulbs when the chandelier is turned on. Do not look directly at lit bulbs.
3. Keep flammable materials away from lit bulbs.
4. This chandelier contains lead, chemical known to the State of California to cause cancer, birth defects, and other reproductive harm. Wash hands after assembling, handling, cleaning, or otherwise touching his chandelier.

to assemble:

Remove all parts and hardware from box along with any plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

1. **SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.**
2. Gently pull existing Ground, Hot, and Neutral Junction Box Wires down from the Ceiling Junction Box and allow them to hang.
3. Carefully inspect the chandelier's fixture wires. The Neutral Fixture Wire is ribbed. The Hot Fixture Wire is smooth, and the Ground Fixture Wire is in copper.

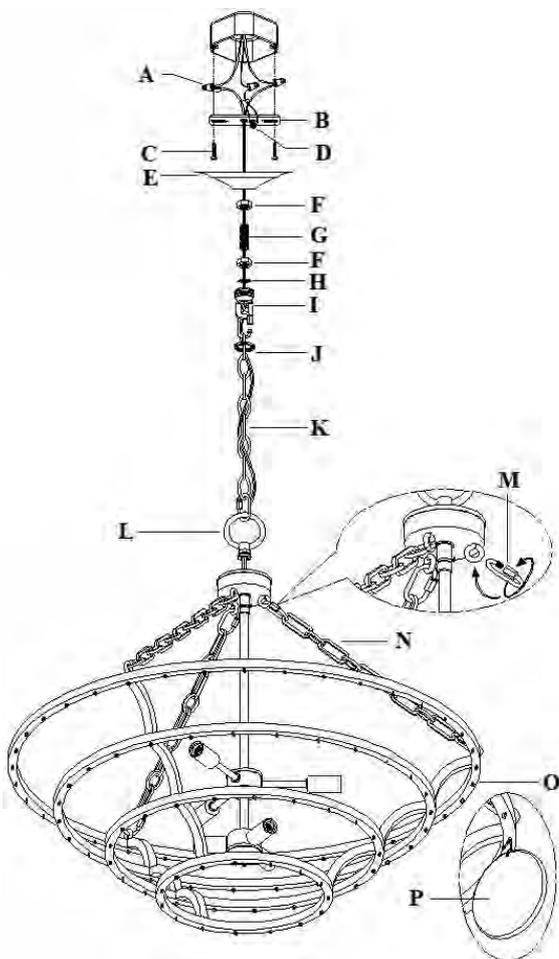

Carraway Chandelier

ARHAUS®

your home

- 4 Attach the Ground Wire from the fixture to the Ground Junction Box Wire; It usually has green insulation around it or is bare wire. Fasten them together with a Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed. If Ceiling Outlet Junction Box does not have a Ground Junction Box Wire, insert the Ground Screw (D) into the Mounting Bracket (B) where it's marked "Ground", facing down and wrap the fixture's ground wire around the Ground Screw (D). Tighten the Ground Screw (D) to clamp Ground Fixture Wire between the head of Ground Screw (D) and Mounting Bracket (B). IT IS IMPERATIVE THAT THE CEILING OUTLET JUNCTION BOX IN YOUR HOME BE PROPERLY GROUNDED!
- 5 Connect the Neutral Fixture Wire to the Neutral Junction Box Wire; it usually has white insulation around it. Fasten them together with a plastic Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed.
- 6 Connect the Hot Fixture Wire to Hot Junction Box Wire; it usually has black insulation around it. Fasten them together with a plastic Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
- 7 Gently tuck the wire connections neatly into the Ceiling Outlet Junction Box.
- 8 Attach the Mounting Bracket (B) onto the Ceiling Outlet Box using Mounting Screws (C). Tighten screws with a Screwdriver until secure.
- 9 Attach one Hex Nut (F) to the top, and the other Hex Nut (F) to the bottom of the Nipple (G). Put the Lock Washer (H) in before attaching the Screw Collar Loop (I) to the bottom end of the Nipple (G).
- 10 Secure the top of Nipple (G) to the Mounting Bracket (B) with the Hex Nut (F), exposing approximately 2" of its thread.
- 11 Slide the Canopy (E) and the Threaded Ring (J) up the Chain (K).
- 12 Place the Canopy (E) over the Ceiling Outlet Junction Box and secure it in place by screwing the Threaded Ring (J) onto the Screw Collar Loop (I).
- 13 Connect Chandelier Body (O) to the top of Chandelier Centre Pole by Decorative Hanging Chain (N). Close the openings of Quick links (for Decorative Hanging Chain) (M) on the Decorative Hanging Chain (N) by screwing the nut clockwise.
- 14 Attach the Fixture Loop (L) to the top of the Chandelier Centre Pole.
- 15 Connect Chain (K) to Fixture Loop (L) and hang up to Screw Collar Loop (I) by using Quick Links. Close the opening of Quick links by screwing the nut clockwise.

- 16 Attach Glass Disc (P) onto Chandelier Body (O).
- 17 Insert SIX(6) 60-Watt maximum Type B Candelabra incandescent light bulbs (not included) or SIX (6) 5-watt LED light bulbs into the socket into the sockets. Do not exceed the specified wattage.
- 18 Restore power to junction box and test the fixture.
- 19 Installation is now completed.

care instructions:

1. Wipe clean with a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the chandelier's finish.

Made in China

Parts Inventory

| Super Category | Product ID | Description | Stat | Collection | Route |
|----------------|--------------|-----------------------------------------------------|------|------------|-------|
| LIGHTING | 91594L403CH | CARRAWAY CHAND 12 FT CHAIN 12 FT HANGING CHAIN | A | PT-CARRAWA | PART |
| LIGHTING | 91594L403CH6 | CARRAWAY CHAND 6 FT CHAIN 6 FT HANGING CHAIN | A | PT-CARRAWA | PART |
| LIGHTING | 91594L403CN | CARRAWAY CHANDELIER CANOPY CANOPY W/ HARDWARE | A | PT-CARRAWA | PART |
| LIGHTING | 91594L403D | CARRAWAY CHANDELIER DISC CLEAR SEEDED GLASS DISC | A | PT-CARRAWA | PART |

CASCADE CHANDELIER

ARHAUS®

your home

parts enclosed:

- A. Wire connector (2)
- B. Mounting screw (2)

important safety instructions:

1. Professional installation recommended.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

UL NO: E320392, UL RATING: DRY, MAX BULB WATTAGE: 60 W
CONVERSION TO MAX LED WATTAGE: 12 W
BULB: 6 X B-10 (NOT INCLUDED)

warnings:


1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Measure desired drop of fixture from ceiling, and remove any unnecessary links from chain (G), if required.
3. Attach cross bar (D) to the threaded tube (C) and to ceiling outlet box using mounting screws (B).
4. Tuck the end link of the chain (H) and lift the chandelier to attach to the mounting loop and secure the link.
5. Feed wire through chain.
6. Pull wire from ceiling outlet box, and Attach Ground wire to the ground wire from the outlet box (Usually green wire) with a wire connector (A) and wrap the connection with electrical tape.
7. Connect the hot wire to the hot outlet box wire (usually black) with a plastic wire connector (A) and wrap the connection with electrical tape.
8. Connect the neutral wire to the neutral outlet wire (usually White) with a plastic wire connector (A) and wrap the connection with electrical tape.
9. Tuck these wire connections neatly into the ceiling outlet box.
10. Raise the canopy (E) up and hold flush against ceiling. Screw the chain nut (F) onto the threaded tube to secure it and hang the fixture.
11. Insert the recommended (J) 60 -watt MAX - B-10 Candelabra Bulb (not included).
12. Restore power to the junction box and test the fixture.

care instructions:

1. Wipe occasionally with a soft, lightly damp, lint free cloth.
2. Finish with a dry cloth.
We do not recommend the use of chemical cleaners abrasives or any furniture polish.

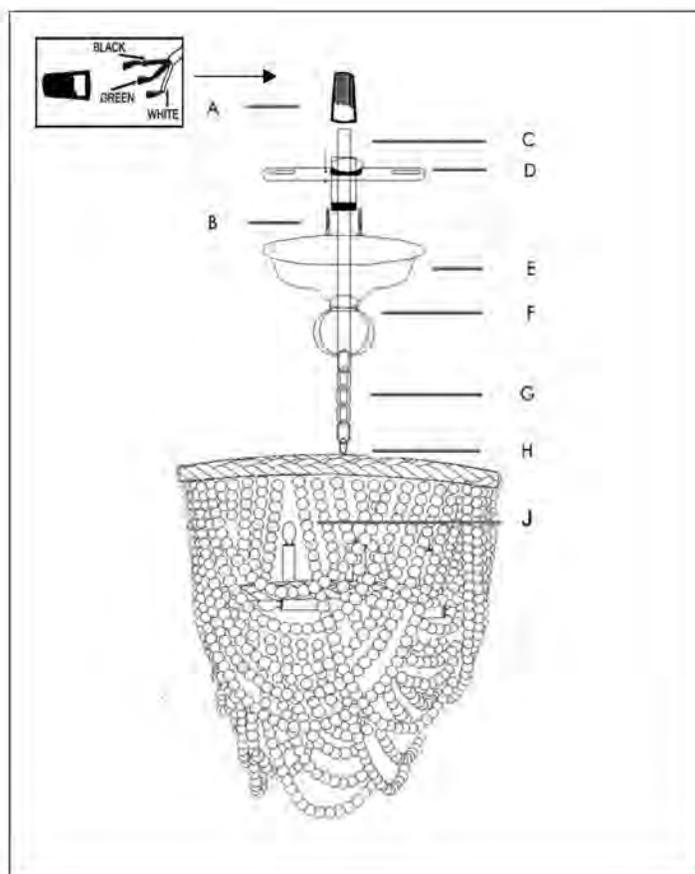


CASCADE BLUE FLUSHMOUNT

ARHAUS[®]
your home

parts enclosed: hardware enclosed:

(A) Mounting plate (1)
(B) Canopy (1)
(C) Canopy nuts (3)

(a) Green ground screw (1)
(b) Plastic wire connectors (3)
(c) Mounting screws (2)

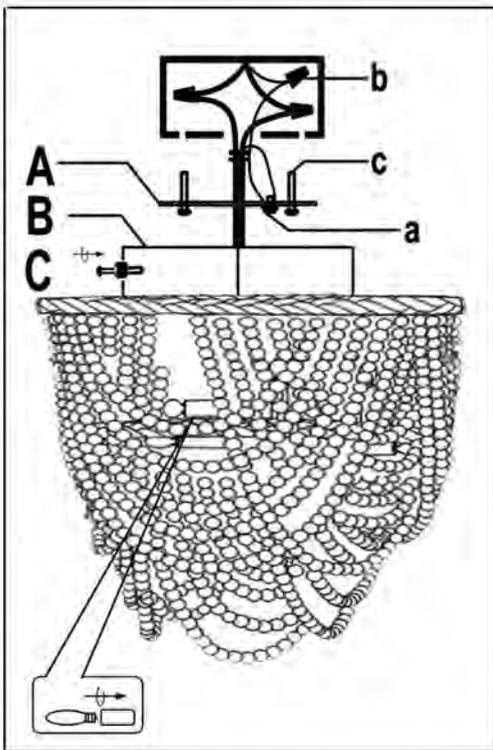

important safety instructions:

1. Professional installation recommended.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

UL NO: E320392, UL RATING: DRY, This fixture has been rated for three (3) 40 watt maximum E12 Incandescent bulbs or (3) 7 watt maximum E12 LED bulbs.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Shut OFF power to the junction from the main fuse box/circuit breaker where the fixture will be installed.
3. Separate mounting plate (A) from canopy (B) by unscrewing all three canopy nuts (C). Attach mounting plate (A) to the outlet box using the mounting screws (c) and tighten.
4. Connect the hot wire on the fixture to the hot outlet box wire (usually black) with a plastic wire connector (b) and wrap the connection with electrical tape.
5. Connect the neutral wire on the fixture to the neutral outlet box wire (usually white) with a plastic wire connector (b) and wrap the connection with electrical tape.
6. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (usually green) Or wrap the ground wire around the green ground screw (a).
7. Tuck the wire connections neatly into the ceiling outlet box.
8. Raise the fixture and attach the canopy (B) to the mounting plate (A). Use the canopy nuts (C) to secure the canopy (B).
9. Insert the recommended B-10 Candelabra bulbs (not included) into the sockets.
10. Restore power to the junction box and test the fixture.
11. Installation is complete.

care instructions:

1. Wipe occasionally with a soft, lightly damp, lint free cloth.
2. Finish with a dry cloth.
We do not recommend the use of chemical cleaners abrasives or any furniture polish.


Parts Inventory

| Super Category | Product ID | Description | Stat | Collection | Route |
|----------------|--------------|-------------------------------------------------------------|------|------------|-------|
| LIGHTING | 912012H064CH | CASCADE GREY CHAND 12 FT CHAIN 12 FT RUST HANGING CHAIN | A | PT-CASCADE | PART |
| LIGHTING | 912012H064C6 | CASCADE GREY CHAND 6 FT CHAIN 6 FT RUST HANGING CHAIN | A | PT-CASCADE | PART |
| LIGHTING | 912012H064CN | CASCADE GREY CHAND CANOPY RUST CANOPY WITH HARDWARE | A | PT-CASCADE | PART |
| LIGHTING | 912012H127CH | CASCADE IVORY CHAND 12FT CHAIN 12 FT BLACK HANGING CHAIN | A | PT-CASCADE | PART |
| LIGHTING | 912012H127C6 | CASCADE IVORY CHAND 6 FT CHAIN 6 FT BLACK HANGING CHAIN | A | PT-CASCADE | PART |
| LIGHTING | 912012H127CN | CASCADE IVORY CHAND CANOPY BLACK CANOPY WITH HARDWARE | A | PT-CASCADE | PART |

CAYDON BLACK TABLE LAMP BASE

parts enclosed:

- A. Finial (1)
- B. Harp (1)

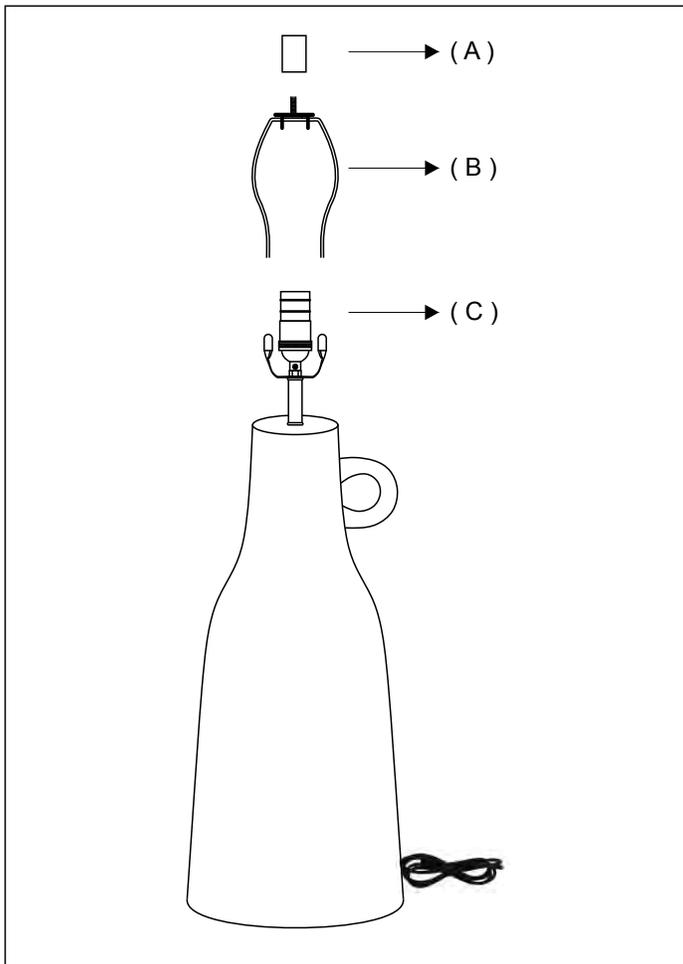

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

UL NO: E510817, UL RATING: DRY,
MAX BULB WATTAGE: 40 W
CONVERSION TO MAX LED WATTAGE: 12 W
BULB: 1 X A-19 (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings.
2. Turn OFF power to the circuit breaker where the lamp will be installed.
3. Attach harp (B) to the saddle (C).
4. Unscrew finial (A) place shade on harp (B) and tighten finial (A) to harp (B).
5. Restore power to the circuit breaker and test lamp fixture.


care instructions:

Do not use polishes or cleaners on your lamp. Wipe with soft, lint free cloth.

CAYDON WHITE TABLE LAMP BASE

parts enclosed:

- A. Finial (1)
- B. Harp (1)

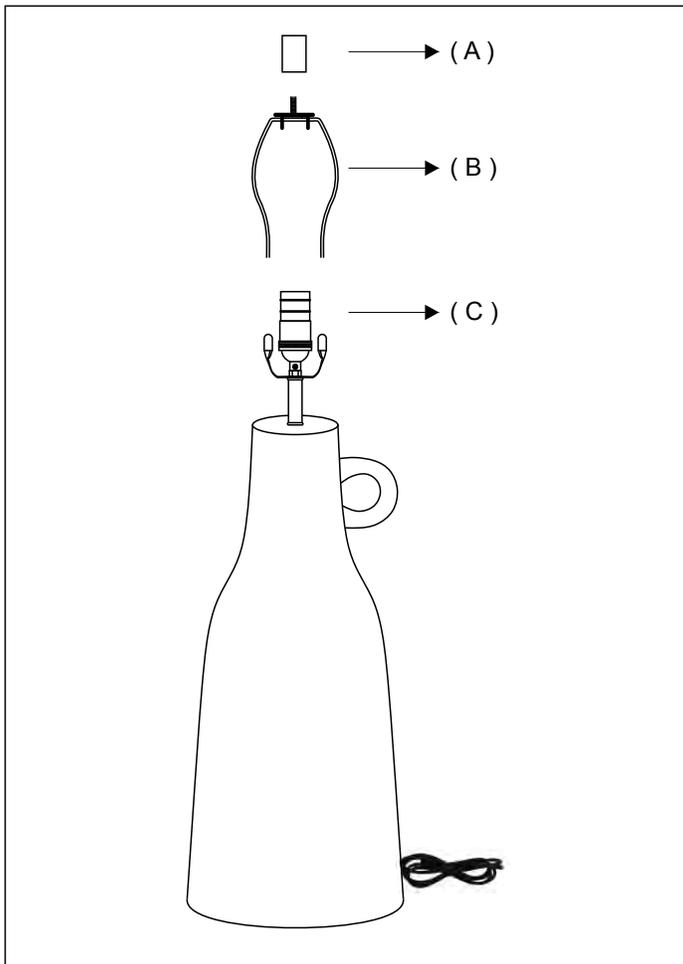

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

UL NO: E510817, UL RATING: DRY,

MAX BULB WATTAGE: 40 W

CONVERSION TO MAX LED WATTAGE: 12 W

BULB: 1 X A-19 (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings.
2. Turn OFF power to the circuit breaker where the lamp will be installed.
3. Attach harp (B) to the saddle (C).
4. Unscrew finial (A) place shade on harp (B) and tighten finial (A) to harp (B).
5. Restore power to the circuit breaker and test lamp fixture.

care instructions:

Do not use polishes or cleaners on your lamp. Wipe with soft, lint free cloth.

parts enclosed:

| | | |
|---|-------------------|----|
| A | Wire Connector | 3 |
| B | Mounting Bracket | 1 |
| C | Mounting Screw | 2 |
| D | Ground Screw | 1 |
| E | Canopy | 1 |
| F | Hex Nut | 2 |
| G | Nipple | 1 |
| H | Lock Washer | 1 |
| I | Screw Collar Loop | 1 |
| J | Threaded Ring | 1 |
| K | Chain | 1 |
| L | Fixture Loop | 1 |
| M | Chandelier Body | 1 |
| N | Crystal Drops | 18 |
| O | Candle Sleeve | 6 |
| P | Quick link | 1 |

caution:

BEFORE INSTALLING THIS FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.
3. This fixture is meant for indoor use, DRY LOCATIONS ONLY.
4. Do not use the electric cord to support the weight of the fixture.
5. These instructions are provided for your safety. It is important that they are read carefully and completely before beginning the installation of this lighting fixture.
6. For your safety, it is strongly recommended that two people install the lighting fixture.
7. Please save these instructions.


warnings:

1. Do not remove the fixture from the packaging by pulling on the power cord as a bad connection or damage may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off the fixture and allow it to cool prior to replacing the light bulbs.
3. Do not touch the bulbs when the fixture is turned on. Do not look directly at lit bulbs.
4. Keep flammable materials away from lit bulbs.

to assemble:

Remove all the parts and hardware from the box along with any plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
2. Attach the Mounting Bracket (B) onto the Ceiling Outlet Box using Mounting Screws (C). Tighten the screws with a screwdriver until secure.
3. Attach one Hex Nut (F) to the top, and the other Hex Nut (F) to the bottom of the Nipple (G). Put the Lock Washer (H) in before attaching the Screw Collar Loop (I) to the bottom end of the Nipple (G).
4. Thread the Nipple (G) to the Mounting Bracket (B) and secure it with the Hex Nut (F), exposing approximately 2" of its thread.
5. Pull out the fixtures wire power cord and the bare copper ground wire woven through the Chain (K).
6. Slide the Canopy (E) and the Threaded Ring (J) up the Chain (K).
7. Connect Chain (K) to the Screw Collar Loop (I) by using the Quick Link (P). Close the opening of the Quick Link (P) by screwing the nut clockwise.

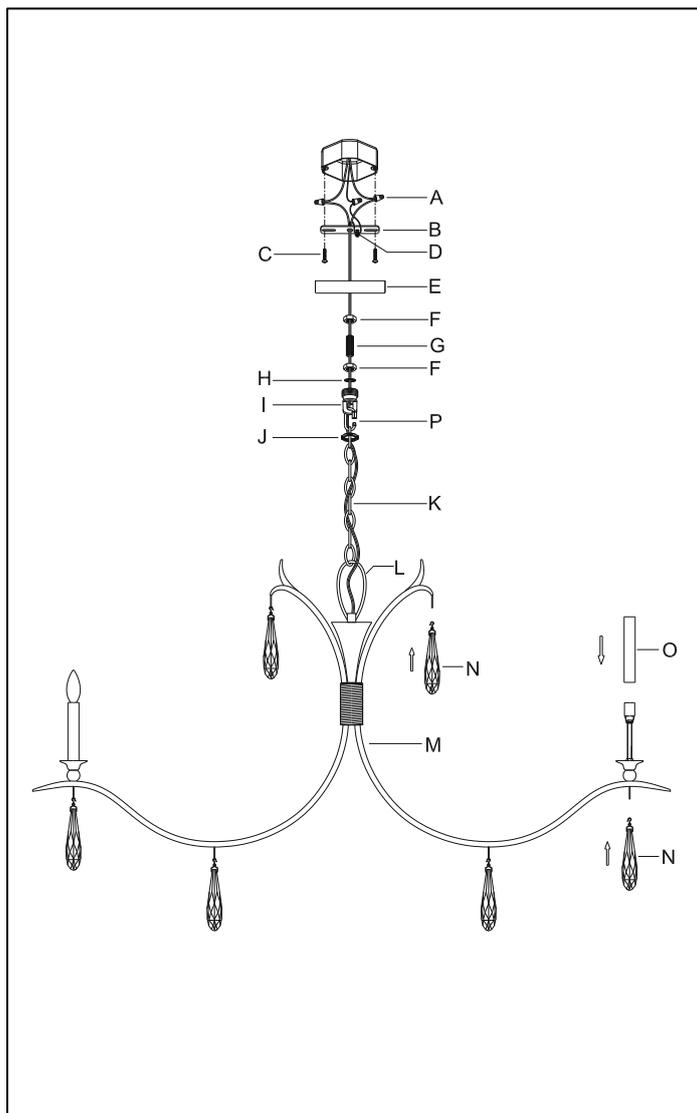

8. Gently pull existing ground, hot, and neutral junction box wires down from the ceiling junction box and allow these to hang.
9. Carefully inspect the fixture wires on the chandelier. The neutral fixture wire is ribbed. The hot fixture wire is smooth, and the ground fixture wire is bare copper.
10. Attach the ground wire from the fixture to the ground junction box wire. It usually has green insulation around it or is bare. Fasten these together with a Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed. If the ceiling outlet junction box does not have a ground junction box wire, insert the Ground Screw (D) into the Mounting Bracket (B) where it is marked "Ground" facing down, and wrap the ground wire from the fixture around the Ground Screw (D). Tighten the Ground Screw (D) to clamp the ground fixture wire between the head of Ground Screw (D) and Mounting Bracket (B). **IT IS IMPERATIVE THAT THE CEILING OUTLET JUNCTION BOX IN YOUR HOME BE PROPERLY GROUNDED!**
11. Connect the neutral fixture wire to the neutral junction box wire. It usually has white insulation around it. Fasten these together with a plastic Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed.
12. Connect the hot fixture wire to the hot junction box wire. It usually has black insulation around it. Fasten these together with a plastic Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
13. Gently tuck the wire connections neatly into the ceiling outlet junction box.
14. Place the Canopy (E) over the ceiling outlet junction box and secure it in place by screwing the Threaded Ring (J) onto the Screw Collar Loop (I).
15. Attach Crystal drops(N) onto Chandelier Body (M)
16. Slide the Candle Sleeves(O) over the sockets.
17. Insert Six (6) 25-Watt maximum Type B incandescent light bulb (not included), or Six (6) 6-watt maximum compact fluorescent light bulb (not included), or Six (6) 4-watt maximum LED light bulb (not included) into the socket. **DO NOT EXCEED SPECIFIED WATTAGE.**
18. Restore power to junction box and test the fixture.
19. Installation is now completed.

care instructions:

1. Wipe clean with a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the chandelier finish

ARHAUS

CLARENCE FLOOR LAMP

Assembly Instructions

Important Safety Instructions:

- For safety purposes, this lamp is equipped with a polarized plug (one blade is wider than the other). If the plug does not fit securely into your outlet, do not force it – contact a professional electrician. Use the plug with an extension cord only if it can be fully inserted into the cord's socket. Never alter the plug in any way.
- These instructions are provided for your safety. It is important that they are read carefully and completely before assembling fixture.
- This fixture has been rated for up to (1) E26/max 9-watt LED standard bulb (included). To avoid the risk of fire, do not exceed the recommended wattage.

Warning:

- To reduce the risk of fire, electrical shock, or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light bulb.
- Do not touch bulb when fixture is turned on. Do not look directly at light bulb.
- Keep flammable materials away from light bulb.

Pre-assembly:


- Remove all parts and hardware from box along with any plastic protective packaging.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

To Assemble: (Please refer to page 2 for image)

1. Assemble all part of KD.
2. Insert one 9W LED Bulb (4) (included) into threaded Socket.
3. Insert Harp (1) together.
4. Place Shade on Harp(1) top and secure Finial (3) by tightening
5. Assembly is completed.

Care Instructions:

- Clean with a soft, dry cloth or static duster.
- Always avoid the use of harsh chemicals or abrasive cleaners.

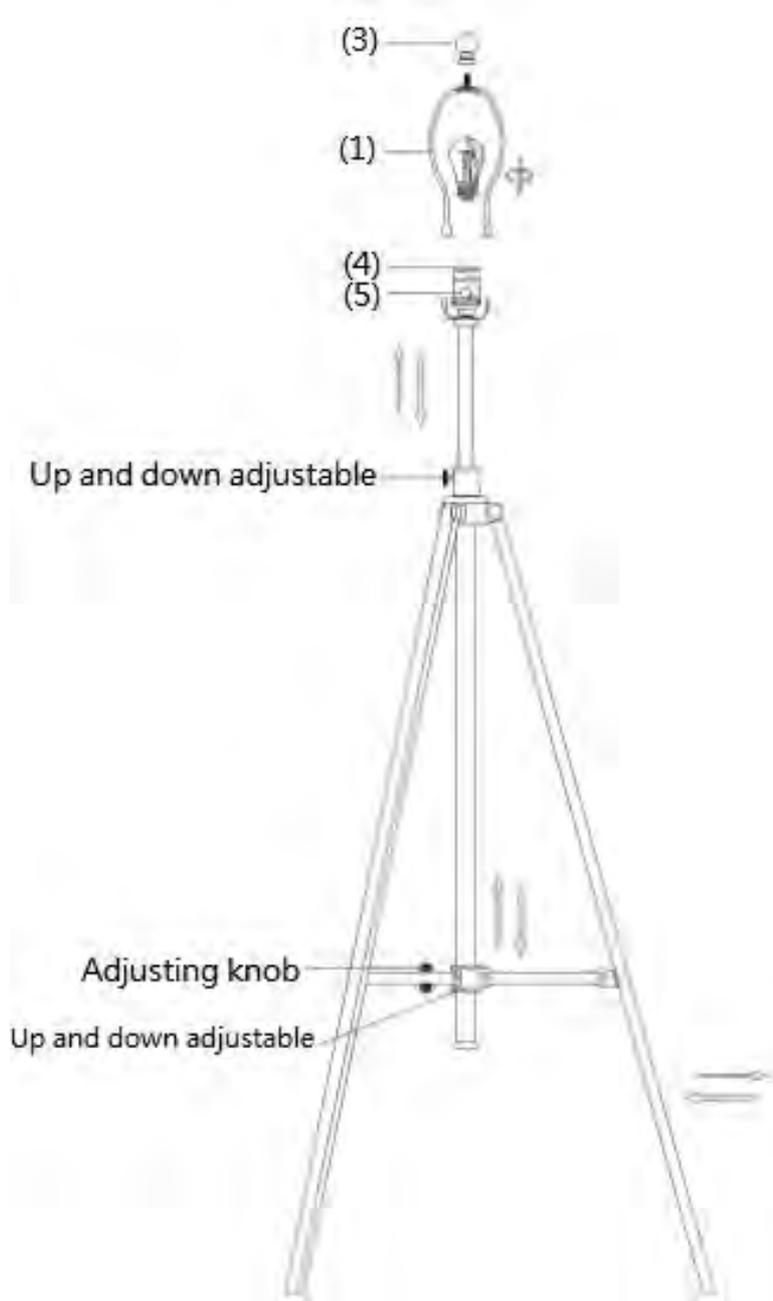

Customer service

Our team of customer service professionals is available to assist you with products that are already in your home. **Phone:** 1.800.777.1745 x3050 **E-mail:** customerservice@arhaus.com

Thank you for purchase!

| www.arhaus.com |

12LTS CHANDELIER #65636H0257

ARHAUS®

your home

parts enclosed:

- (D) wire nuts (3)
- (E) cross bar set (1)
- (F) cross bar screws (2)
- (I) canopy (1)

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

wattage: 12 x 40W
type of socket: E12

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

- Attach cross bar (E) to the ceiling junction box using the cross bar screws (F).
- Unscrew the collar ring (J).
- Insert the collar loop (H) into the canopy (I).
- Screw the collar ring (J) back.
- Attach the chandelier chain (L) to the collar loop (H) with the quick link (K).


See back of the page for wiring connection details.

replacement parts assembly:

- To replace the final glass sphere (O) screw the finial ball in the threaded part of the chandelier bottom.
- To replace the glass drops (N) insert wire clip into the hole on the iron bud, through the glass part. Twist the wire around iron bud to secure glass part in place.

care instructions:

Clean with dry soft cloth/brush only.
Do not use water/alcohol or any detergent.

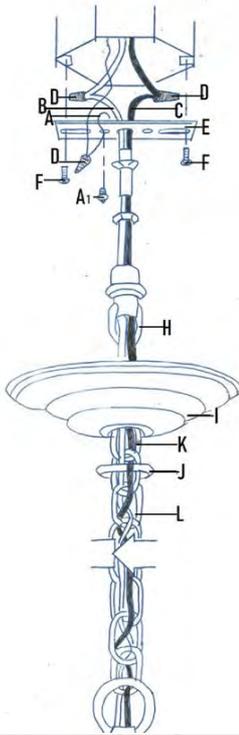

12 LTS CHANDELIER
#65636H0257

ARHAUS™

your home

IMPORTANT INSTRUCTION




step n. 1

Unscrew the iron support (P) for the chandelier from the finial.

step n. 2

Screw the glass sphere finial (O) on the finial of chandelier.

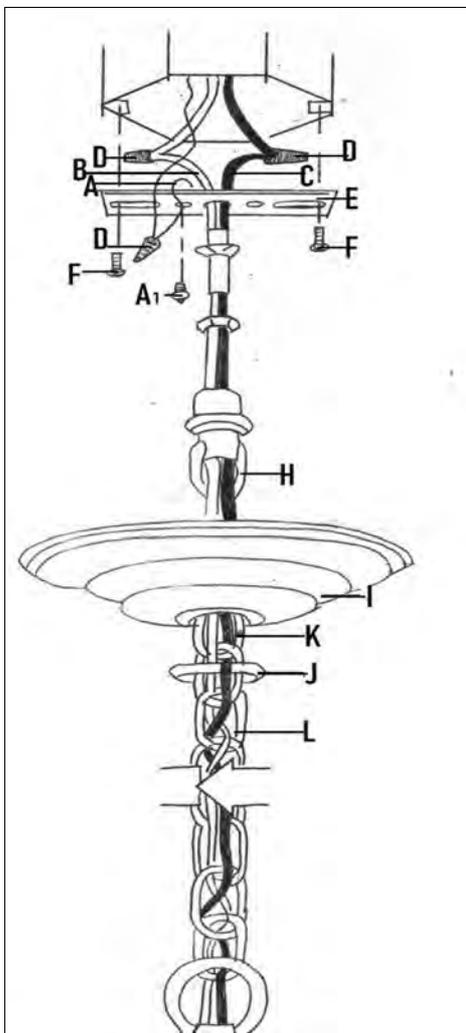

INSTALLATION INSTRUCTIONS

INCANDESCENT SURFACE MOUNTED LUMINAIRES:

CAUTION

- A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT MUST INSTALL THIS PRODUCT IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE AND THE HAZARDS INVOLVED.

WARNING

- The electricity MUST be turned off at the MAIN FUSE BOX before installation of this luminaire; turning the power off using the light switch is not sufficient to prevent electrical shock.
- Luminaires weighing 50 lbs (25 lbs for surface wall) or more must be mounted directly to the building structure, independently of the electrical box; this installation should not be made on a radiant heat type ceiling.

- If a chain-and-canopy luminaire is provided of an individual grounding conductor (bare or insulated), this shall be interwoven through the chain from the luminaire to the canopy.
- If chain-and-canopy luminaire is provided of a SPT-1 power supply cord type, this shall interwoven through the chain from the luminaire to the canopy.
- The luminaires are not intended to support external weight other than provided glasses.

- WIRE CONNECTION CHART:

| Connect Black or Red (Hot) House Wire to: | Connect White (Neutral) House Wire to: |
|---------------------------------------------------------|---------------------------------------------------------|
| Black (Hot) | White (Neutral) |
| Parallel cord (round and smooth) | Parallel cord (square or ridged) |
| Clear, Brown, Gold or Black without tracer | Clear, Brown, Gold or Black with tracer |
| Insulated wire (other than green) with copper conductor | Insulated wire (other than green) with silver conductor |

- ELECTRICAL CONNECTION:

- 1 Attach grounding wire (green insulated or bare copper) from the supply circuit to the mounting bracket with the green ground attachment screw provided. Connect the grounding wire of the luminaire to the grounding conductor of the supply circuit. Attach all grounding conductors to the mounting bracket with the green ground wire attachment screw.
- 2 Referring to the Wire Connection Chart, connect the black and white wires.


CAUTION

No loose strands or loose connections should be present. Secure with U.L. certified wire connectors and electrical tape.

- FINAL INSTRUCTION:

- 1 Install light bulbs, refer to the relamping label located near the lampholder for recommended wattage. DO NOT EXCEED THE RECOMMENDED WATTAGE.
- 2 Restore electricity and check the operation of the luminaire.

In case of change of the article, not previously authorized, the UL Certification will be terminated immediately

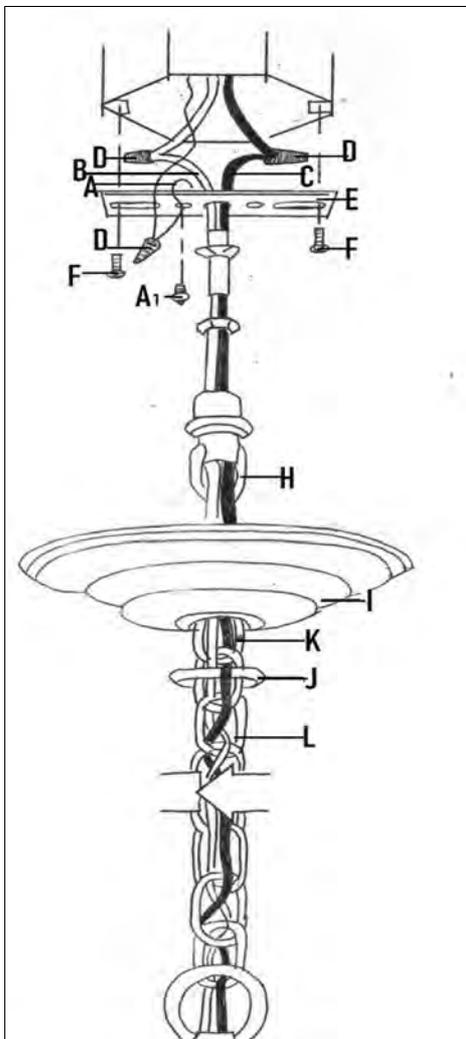

NOTICE DE MONTAGE PLAFONNIERES INCANDESCENTES

ATTENTION

- Le montage doit être effectué par personnes compétentes selon le code d'installation en vigueur et les risques impliqués.
- La sûreté de l'installation est soumise au correct usage des instructions suivantes

AVERTISSEMENT

- Avant d'effectuer chaque opération, couper le courant à la boîte du fusible principale. La mise hors tension grâce à l'interrupteur n'est pas suffisante pour prévenir les chocs électriques.
- Luminaires qui sont lourds 50 Lbs. Ou plus (25 Lbs. Pour appareil mur) doivent être montés directement à la structure du bâtiment, de façon indépendante de la boîte électrique; cette installation ne doit pas être fait sur un plafond avec systèmes de chauffages radiants
- Dans le cas du luminaire avec chaîne et pavillon, il faut passé les câbles a travers les maillons de la chaîne, soit s'il est équipé avec un câble conducteur de mise à la terre individuelle (nu ou isolé), soit s'il est équipé avec un câble d'alimentation SPT-1.
- Les appareils ne devraient pas porte plus de poids que celle prévue pour les verres décoratif

• TABLE CONNEXION CABLES:

| Connecter le fil de la maison NOIR ou ROUGE (phase) avec: | Connecter le fil de la maison BLANC (neutre) avec: |
|-----------------------------------------------------------|----------------------------------------------------|
| Noir (Phase) | Blanc (neutre) |
| Fil parallèle (ronde et lisse) | Fil parallèle (carré ou striée) |
| Clair, Marron, Or ou Noir SANS traceur | Clair, Marron, or ou Noir AVEC traceur |
| Fil isolé (autre que Vert) avec conducteur Cuivre | Fil isolé (autre que Vert) avec conducteur Argent |

• CONNEXIONS ÉLECTRIQUES

1. Fixez le fil de terre (vert isolé ou cuivre nu) du circuit d'alimentation au support de montage par la vis vert de fixation de terre fourni.
2. Connectez le fil de mise à la terre du luminaire au conducteur de mise à la terre du circuit d'alimentation. Fixez tous les conducteurs de terre au support de montage avec la vis vert de fixation.
3. Connectez les fils noir et blanc en référant à la table connexion câbles

ATTENTION

Fil libre ou des connexions desserrées ne doivent pas être présents. Fixer avec des connecteurs de fils certifié UL et du ruban électrique.

• INSTALLATION FINALE

1. Installer des ampoules de puissance recommandée, reportez-vous à l'étiquette de remplacement de la lampe situé en proximité de la douille.
2. Ne pas dépasser la puissance recommandée

AVERTISSEMENT

Instructions supplémentaires

Pour la fixation, utiliser les vis fournies et vérifier que le pavillon couvre complètement la boîte de sortie.

En cas de changement d'article, pas autorisé précédemment, la certification UL se terminera immédiatement.

LIGHTING PARTS SKUS

| CATEGORY | SKU | DESCRIPTION | STATUS | COLLECTION | ROUTE |
|----------|--------------|----------------------------------------------------------------|--------|------------|-------|
| LIGHTING | 91636H257CH6 | 12 LT SLVR 6 FT CHAIN 5 MM X 1.8 MT SILVER CLAY CHAI | A | PT-CLAUDET | PART |
| LIGHTING | 91636H257CR | CLAUDET 12 LT CRYSTAL 38 MM DROP CRYSTAL | A | PT-CLAUDET | PART |
| LIGHTING | 91636H257F | CLAUDET 12 LT FINIAL 30 MM GLASS FINIAL | A | PT-CLAUDET | PART |
| LIGHTING | 91636H257CH | CLAUDET 12 LT RUST 12' CHAIN 5 MM X 3.7 MT RUST CHAIN | A | PT-CLAUDET | PART |
| LIGHTING | 91636H257CN | CLAUDET 12 LT RUST CANOPY RUST FINISH CANOPY W/ HARDWARE | A | PT-CLAUDET | PART |
| LIGHTING | 91636H121CH | CLAUDET 12 LT SLVR 12' CHAIN 5 MMX3.7 MT GREY SILV FINSH CH | A | PT-CLAUDET | PART |
| LIGHTING | 91636H121CH6 | CLAUDET 12 LT SLVR 6' CHAIN 5 MMX1.8 MT GREY SILV FINSH CH | A | PT-CLAUDET | PART |
| LIGHTING | 91636H121CN | CLAUDET 12 LT SLVR CANOPY GREY SILV FNSH LG CNPY W/ HRDW | A | PT-CLAUDET | PART |
| LIGHTING | 91636H121CR | CLAUDET 12 LT SLVR CRYSTAL 38 MM DROP CRYSTAL | A | PT-CLAUDET | PART |
| LIGHTING | 91636H121F | CLAUDET 12 LT SLVR FINIAL 30 MM GLASS FINIAL | A | PT-CLAUDET | PART |
| LIGHTING | 916587H059C6 | CLAUDETTE CHAND 6 FT CHAIN 6 FT IRON CHAIN | D | PT-CLAUDET | PART |
| LIGHTING | 916587H059CC | CLAUDETTE CHAND CANDLE COVER CANDLE SLEEVE | D | PT-CLAUDET | PART |
| LIGHTING | 916587H059CR | CLAUDETTE CHANDELIER CRYSTAL HAND CUT CRYSTALS | D | PT-CLAUDET | PART |
| LIGHTING | 91636H302CR | CLAUDETTE SCONCE CRYSTAL 38 MM DROP CRYSTAL | D | PT-CLAUDET | PART |

COLLIER 6 LTS CHANDELIER - ASH WHITE #66636H056

ARHAUS®

your home

parts enclosed:

- (D) wire nuts (3)
- (E) cross bar set (1)
- (F) cross bar screws (2)
- (I) canopy (1)

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

wattage: 6 x 40W
type of socket: E12

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

- Attach cross bar (E) to the ceiling junction box using the cross bar screws (F).
- Unscrew the collar ring (J).
- Insert the collar loop (H) into the canopy (I).
- Screw the collar ring (J) back.
- Attach the chandelier chain (L) to the collar loop (H) with the quick link (K).

See back of the page for wiring connection details.


replacement parts assembly:

- To replace top glass sphere (N) screw the hook on the hole of the sphere.
- To replace drop glass (Q),(R) ,flower glass (P) ,sphere glass(O) and big glass (S) insert wire clip into the hole on the iron frame. Bend the wire and secure it.
- To replace small chain(T)insert wire clip into the hole on the iron frame. Bend the wire and secure it.

care instructions:

Clean with dry soft cloth/brush only.
Do not use water/alcohol or any detergent.



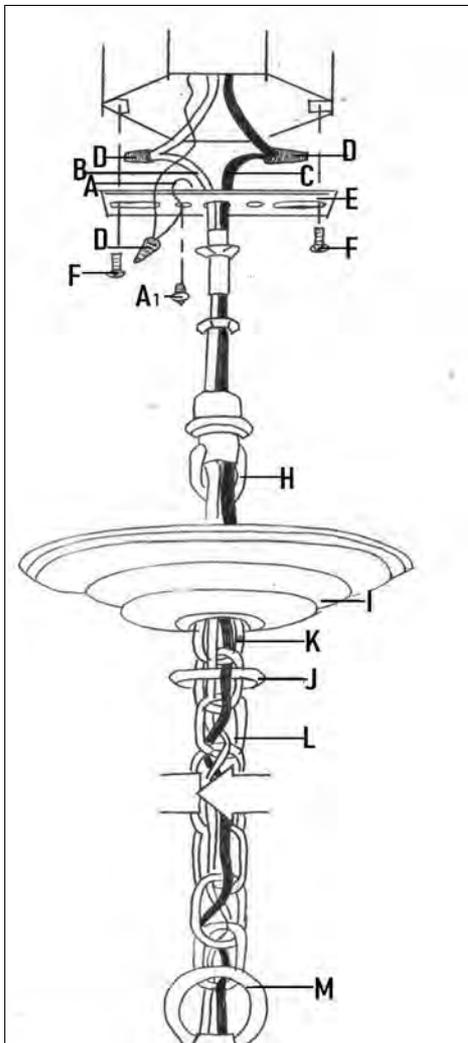

INSTALLATION INSTRUCTIONS

INCANDESCENT SURFACE MOUNTED LUMINAIRES:

CAUTION

- A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT MUST INSTALL THIS PRODUCT IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE AND THE HAZARDS INVOLVED.

WARNING

- The electricity MUST be turned off at the MAIN FUSE BOX before installation of this luminaire; turning the power off using the light switch is not sufficient to prevent electrical shock.
- Luminaires weighing 50 lbs (25 lbs for surface wall) or more must be mounted directly to the building structure, independently of the electrical box; this installation should not be made on a radiant heat type ceiling.

- If a chain-and-canopy luminaire is provided of an individual grounding conductor (bare or insulated), this shall be interwoven through the chain from the luminaire to the canopy.
- If chain-and-canopy luminaire is provided of a SPT-1 power supply cord type, this shall interwoven through the chain from the luminaire to the canopy.
- The luminaires are not intended to support external weight other than provided glasses.

- WIRE CONNECTION CHART:

| Connect Black or Red (Hot) House Wire to: | Connect White (Neutral) House Wire to: |
|---------------------------------------------------------|---------------------------------------------------------|
| Black (Hot) | White (Neutral) |
| Parallel cord (round and smooth) | Parallel cord (square or ridged) |
| Clear, Brown, Gold or Black without tracer | Clear, Brown, Gold or Black with tracer |
| Insulated wire (other than green) with copper conductor | Insulated wire (other than green) with silver conductor |

- ELECTRICAL CONNECTION:

1 Attach grounding wire (green insulated or bare copper) from the supply circuit to the mounting bracket with the green ground attachment screw provided. Connect the grounding wire of the luminaire to the grounding conductor of the supply circuit. Attach all grounding conductors to the mounting bracket with the green ground wire attachment screw.

2 Referring to the Wire Connection Chart, connect the black and white wires.


CAUTION

No loose strands or loose connections should be present. Secure with U.L. certified wire connectors and electrical tape.

- FINAL INSTRUCTION:

- 1 Install light bulbs, refer to the relamping label located near the lampholder for recommended wattage. DO NOT EXCEED THE RECOMMENDED WATTAGE.
- 2 Restore electricity and check the operation of the luminaire.

In case of change of the article, not previously authorized, the UL Certification will be terminated immediately

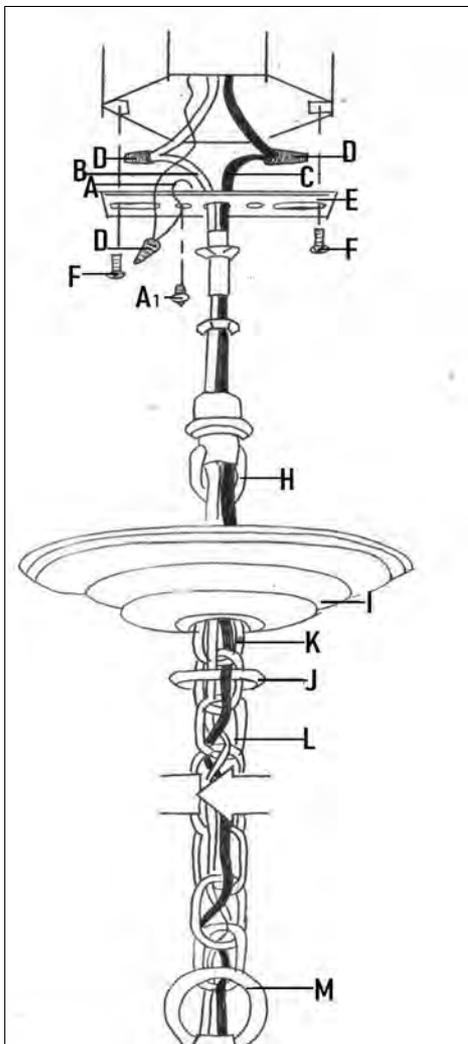

NOTICE DE MONTAGE PLAFONNIERES INCANDESCENTES

ATTENTION

- Le montage doit être effectué par personnes compétentes selon le code d'installation en vigueur et les risques impliqués.
- La sûreté de l'installation est soumise au correct usage des instructions suivantes

AVERTISSEMENT

- Avant d'effectuer chaque opération, couper le courant à la boîte du fusible principale. La mise hors tension grâce à l'interrupteur n'est pas suffisante pour prévenir les chocs électriques.
- Luminaires qui sont lourds 50 Lbs. Ou plus (25 Lbs. Pour appareil mur) doivent être montés directement à la structure du bâtiment, de façon indépendante de la boîte électrique; cette installation ne doit pas être fait sur un plafond avec systèmes de chauffages radiants
- Dans le cas du luminaire avec chaîne et pavillon, il faut passé les câbles a travers les maillons de la chaîne, soit s'il est équipé avec un câble conducteur de mise à la terre individuelle (nu ou isolé), soit s'il est équipé avec un câble d'alimentation SPT-1.
- Les appareils ne devraient pas porte plus de poids que celle prévue pour les verres décoratif

• TABLE CONNEXION CABLES:

| Connecter le fil de la maison NOIR ou ROUGE (phase) avec: | Connecter le fil de la maison BLANC (neutre) avec: |
|-----------------------------------------------------------|----------------------------------------------------|
| Noir (Phase) | Blanc (neutre) |
| Fil parallèle (ronde et lisse) | Fil parallèle (carré ou striée) |
| Clair, Marron, Or ou Noir SANS traceur | Clair, Marron, or ou Noir AVEC traceur |
| Fil isolé (autre que Vert) avec conducteur Cuivre | Fil isolé (autre que Vert) avec conducteur Argent |

• CONNEXIONS ÉLECTRIQUES

1. Fixez le fil de terre (vert isolé ou cuivre nu) du circuit d'alimentation au support de montage par la vis vert de fixation de terre fourni.
2. Connectez le fil de mise à la terre du luminaire au conducteur de mise à la terre du circuit d'alimentation. Fixez tous les conducteurs de terre au support de montage avec la vis vert de fixation.
3. Connectez les fils noir et blanc en référant à la table connexion câbles

ATTENTION

Fil libre ou des connexions desserrées ne doivent pas être présents. Fixer avec des connecteurs de fils certifié UL et du ruban électrique.

• INSTALLATION FINALE

1. Installer des ampoules de puissance recommandée, reportez-vous à l'étiquette de remplacement de la lampe situé en proximité de la douille.
2. Ne pas dépasser la puissance recommandée

AVERTISSEMENT

Instructions supplémentaires

Pour la fixation, utiliser les vis fournies et vérifier que le pavillon couvre complètement la boîte de sortie.

En cas de changement d'article, pas autorisé précédemment, la certification UL se terminera immédiatement.

COLLIER WHITE 8LTS CHANDELIER-ASH WHITE #66636H146

ARHAUS®

your home

parts enclosed:

- (D) wire nuts (3)
- (E) cross bar set (1)
- (F) cross bar screws (2)
- (I) canopy (1)

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

wattage: 8x 40W
type of socket: E12

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

- Attach cross bar (E) to the ceiling junction box using the cross bar screws (F).
- Unscrew the collar ring (J).
- Insert the collar loop (H) into the canopy (I).
- Screw the collar ring (J) back.
- Attach the chandelier chain (L) to the collar loop (H) with the quick link (K).

See back of the page for wiring connection details.

replacement parts assembly:

- To replace top glass sphere (N) screw the hook on the hole of the sphere.
- To replace drop glass (Q),(R) ,flower glass (P) ,sphere glass(O) and big glass (S) insert wire clip into the hole on the iron frame. Bend the wire and secure it.
- To replace small chain(T) insert wire clip into the hole on the iron frame. Bend the wire and secure it.

care instructions:

Clean with dry soft cloth/brush only.
Do not use water/alcohol or any detergent



INSTALLATION INSTRUCTIONS

INCANDESCENT SURFACE MOUNTED LUMINAIRES:

CAUTION

- A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT MUST INSTALL THIS PRODUCT IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE AND THE HAZARDS INVOLVED.

WARNING

- The electricity MUST be turned off at the MAIN FUSE BOX before installation of this luminaire; turning the power off using the light switch is not sufficient to prevent electrical shock.
- Luminaires weighing 50 lbs (25 lbs for surface wall) or more must be mounted directly to the building structure, independently of the electrical box; this installation should not be made on a radiant heat type ceiling.

- If a chain-and-canopy luminaire is provided of an individual grounding conductor (bare or insulated), this shall be interwoven through the chain from the luminaire to the canopy.
- If chain-and-canopy luminaire is provided of a SPT-1 power supply cord type, this shall interwoven through the chain from the luminaire to the canopy.
- The luminaire are not intended to support external weight other than provided glasses.

- WIRE CONNECTION CHART:

| Connect Black or Red (Hot) House Wire to: | Connect White (Neutral) House Wire to: |
|---------------------------------------------------------|---------------------------------------------------------|
| Black (Hot) | White (Neutral) |
| Parallel cord (round and smooth) | Parallel cord (square or ridged) |
| Clear, Brown, Gold or Black without tracer | Clear, Brown, Gold or Black with tracer |
| Insulated wire (other than green) with copper conductor | Insulated wire (other than green) with silver conductor |

- ELECTRICAL CONNECTION:

1 Attach grounding wire (green insulated or bare copper) from the supply circuit to the mounting bracket with the green ground attachment screw provided. Connect the grounding wire of the luminaire to the grounding conductor of the supply circuit. Attach all grounding conductors to the mounting bracket with the green ground wire attachment screw.

2 Referring to the Wire Connection Chart, connect the black and white wires.


CAUTION

No loose strands or loose connections should be present. Secure with U.L. certified wire connectors and electrical tape.

- FINAL INSTRUCTION:

- 1 Install light bulbs, refer to the relamping label located near the lampholder for recommended wattage. **DO NOT EXCEED THE RECOMMENDED WATTAGE.**
- 2 Restore electricity and check the operation of the luminaire.

In case of change of the article, not previously authorized, the UL Certification will be terminated immediately

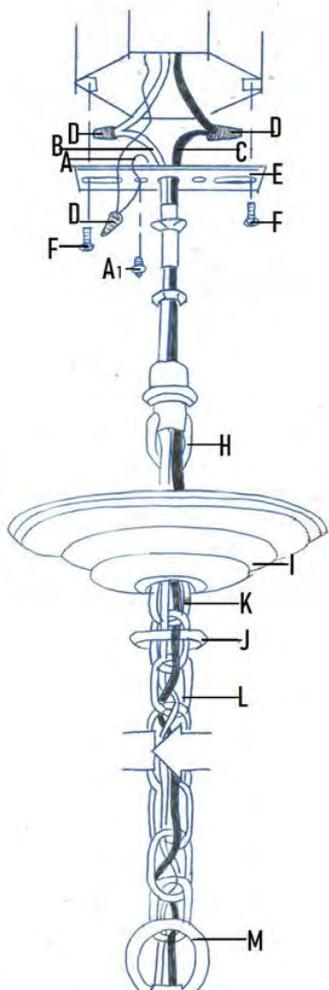

NOTICE DE MONTAGE PLAFONNIERES INCANDESCENTS

ATTENTION

- Le montage doit être effectué par personnes compétentes selon le code d'installation en vigueur et les risques impliqués.
- La sûreté de l'installation est soumise au correct usage des instructions suivantes

AVERTISSEMENT

- Avant d'effectuer chaque opération, couper le courant à la boîte du fusible principale. La mise hors tension grâce à l'interrupteur n'est pas suffisante pour prévenir les chocs électriques.
- Luminaires qui sont lourds 50 Lbs. Ou plus (25 Lbs. Pour appareil mur) doivent être montés directement à la structure du bâtiment, de façon indépendante de la boîte électrique; cette installation ne doit pas être fait sur un plafond avec systèmes de chauffages radiants
- Dans le cas du luminaire avec chaîne et pavillon, il faut passé les câbles a travers les maillons de la chaîne, soit s'il est équipé avec un câble conducteur de mise à la terre individuelle (nu ou isolé), soit s'il est équipé avec un câble d'alimentation SPT-1.
- Les appareils ne devraient pas porte plus de poids que celle prévue pour les verres décoratif

• TABLE CONNEXION CABLES:

| Connecter le fil de la maison NOIR ou ROUGE (phase) avec: | Connecter le fil de la maison BLANC (neutre) avec: |
|-----------------------------------------------------------|----------------------------------------------------|
| Noir (Phase) | Blanc (neutre) |
| Fil parallèle (ronde et lisse) | Fil parallèle (carré ou striée) |
| Clair, Marron, Or ou Noir SANS traceur | Clair, Marron, or ou Noir AVEC traceur |
| Fil isolé (autre que Vert) avec conducteur Cuivre | Fil isolé (autre que Vert) avec conducteur Argent |

• CONNEXIONS ÉLECTRIQUES

1. Fixez le fil de terre (vert isolé ou cuivre nu) du circuit d'alimentation au support de montage par la vis vert de fixation de terre fourni.
2. Connectez le fil de mise à la terre du luminaire au conducteur de mise à la terre du circuit d'alimentation. Fixez tous les conducteurs de terre au support de montage avec la vis vert de fixation.
3. Connectez les fils noir et blanc en référant à la table connexion câbles

ATTENTION

Fil libre ou des connexions desserrées ne doivent pas être présents. Fixer avec des connecteurs de fils certifié UL et du ruban électrique.

• INSTALLATION FINALE


1. Installer des ampoules de puissance recommandée, reportez-vous à l'étiquette de remplacement de la lampe situé en proximité de la douille.
2. Ne pas dépasser la puissance recommandée

AVERTISSEMENT

Instructions supplémentaires

Pour la fixation, utiliser les vis fournies et vérifier que le pavillon couvre complètement la boîte de sortie.

In case of change of article, not previously authorized, the UL Certification will be terminated immediately

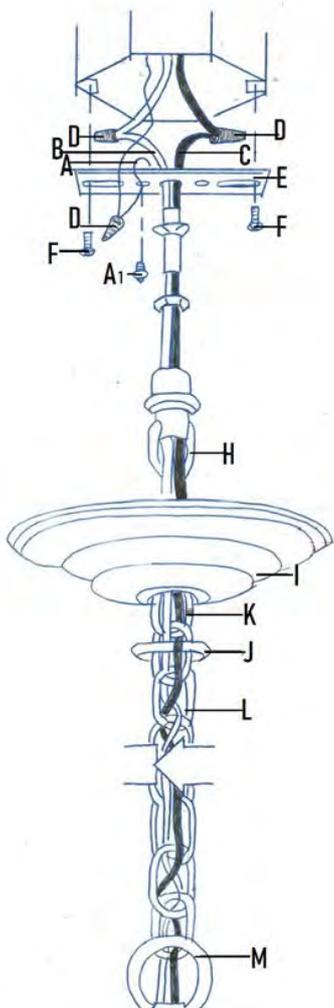

COLLIER 8LTS CHANDELIER

OIL RUBBED BRONZE


#66636H061

ARHAUS®

your home

parts enclosed:

- (D) wire nuts (3)
- (E) cross bar set (1)
- (F) cross bar screws (2)
- (I) canopy (1)

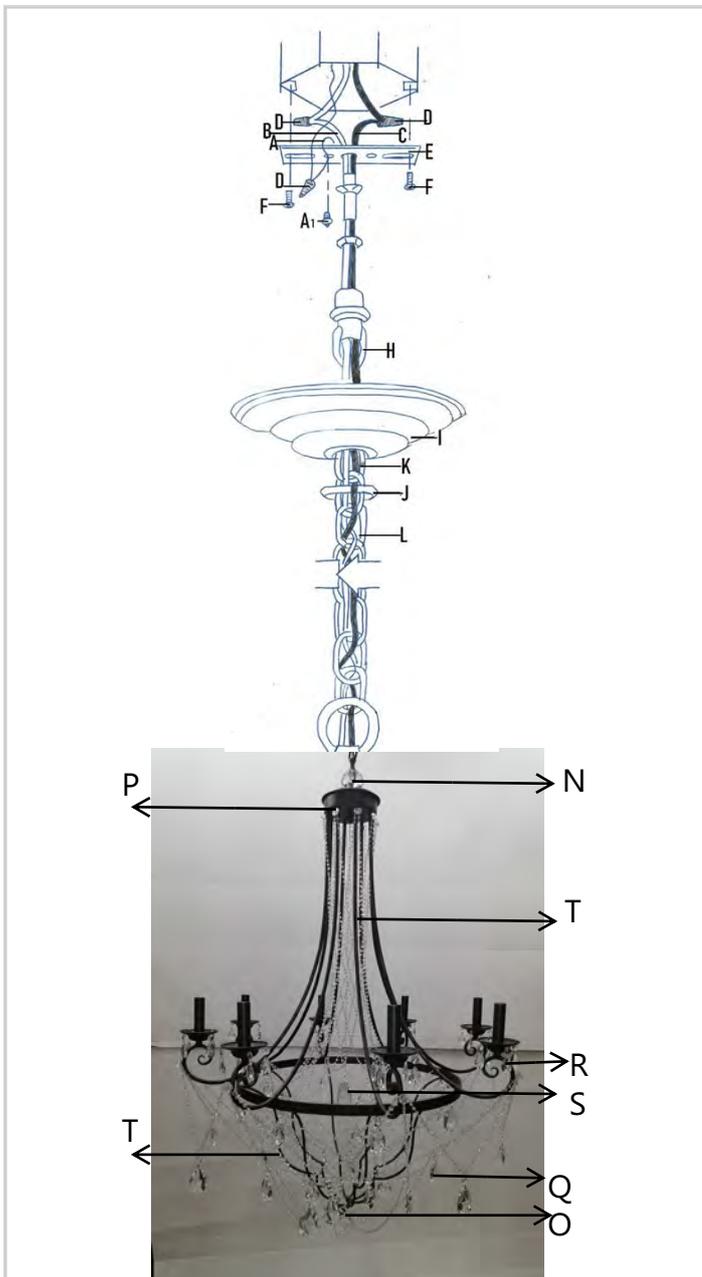

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

wattage: 8 x 40W
type of socket: E12

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

- To ensure chandelier is unpacked properly and reduce risk of damage, carefully remove tape using a cutting device rather than pulling. Do not pull on power cord to remove chandelier from package as a bad connection may result.
- Attach cross bar (E) to the ceiling junction box using the cross bar screws (F).
- Unscrew the collar ring (J).
- Insert the collar loop (H) into the canopy (I).
- Screw the collar ring (J) back.
- Attach the chandelier chain (L) to the collar loop (H) with the quick link (K).

See back of the page for wiring connection details.

replacement parts assembly:

- To replace top glass sphere (N) screw the hook on the hole of the sphere.
- To replace drop glass (Q),(R), flower glass (P), sphere glass (O) and big glass (S) insert wire clip into the hole on the iron frame. Bend the wire and secure it.
- To replace small chain (T) insert wire clip into the hole on the iron frame. Bend the wire and secure it.

care instructions:

Clean with dry soft cloth/brush only.
Do not use water/alcohol or any detergent.

INSTALLATION INSTRUCTIONS

INCANDESCENT SURFACE MOUNTED LUMINAIRES:

CAUTION

- A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT MUST INSTALL THIS PRODUCT IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE AND THE HAZARDS INVOLVED.

WARNING

- The electricity MUST be turned off at the MAIN FUSE BOX before installation of this luminaire; turning the power off using the light switch is not sufficient to prevent electrical shock.
- Luminaires weighing 50 lbs (25 lbs for surface wall) or more must be mounted directly to the building structure, independently of the electrical box; this installation should not be made on a radiant heat type ceiling.

- If a chain-and-canopy luminaire is provided of an individual grounding conductor (bare or insulated), this shall be interwoven through the chain from the luminaire to the canopy.
- If chain-and-canopy luminaire is provided of a SPT-1 power supply cord type, this shall interwoven through the chain from the luminaire to the canopy.
- The luminaires are not intended to support external weight other than provided glasses.

- WIRE CONNECTION CHART:

| Connect Black or Red (Hot) House Wire to: | Connect White (Neutral) House Wire to: |
|---------------------------------------------------------|---------------------------------------------------------|
| Black (Hot) | White (Neutral) |
| Parallel cord (round and smooth) | Parallel cord (square or ridged) |
| Clear, Brown, Gold or Black without tracer | Clear, Brown, Gold or Black with tracer |
| Insulated wire (other than green) with copper conductor | Insulated wire (other than green) with silver conductor |

- ELECTRICAL CONNECTION:

- 1 Attach grounding wire (green insulated or bare copper) from the supply circuit to the mounting bracket with the green ground attachment screw. Connect the grounding wire of the luminaire to the grounding conductor of the supply circuit. Attach all grounding conductors to the mounting bracket with the green ground wire attachment screw.

- 2 Referring to the Wire Connection Chart, connect the black and white wires.


CAUTION

No loose strands or loose connections should be present. Secure with U.L. certified wire connectors and electrical tape.

- FINAL INSTRUCTION:

- 1 Install light bulbs, refer to the relamping label located near the lampholder for recommended wattage. **DO NOT EXCEED THE RECOMMENDED WATTAGE.**
- 2 Restore electricity and check the operation of the luminaire.

In case of change of the article, not previously authorized, the UL Certification will be terminated immediately

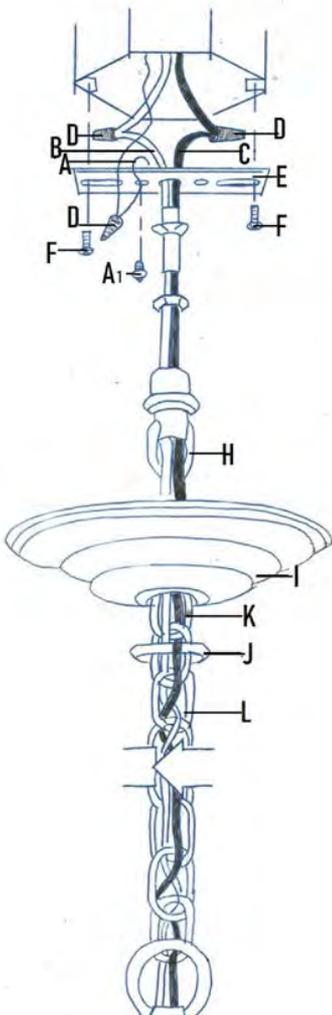

NOTICE DE MONTAGE PLAFONNIERES INCANDESCENTS

ATTENTION

- Le montage doit être effectué par personnes compétentes selon le code d'installation en vigueur et les usages impliqués.
- La sûreté de l'installation est soumise au correct usage des instructions suivantes

AVERTISSEMENT

- Avant d'effectuer chaque opération, couper le courant à la boîte du fusible principale. La mise hors tension grâce à l'interrupteur n'est pas suffisante pour prévenir les chocs électriques.
- Luminaires qui sont lourds 50 Lbs. Ou plus (25 Lbs. Pour appareil mur) doivent être montés directement à la structure du bâtiment, de façon indépendante de la boîte électrique; cette installation ne doit pas être fait sur un plafond avec systèmes de chauffages radiants
- Dans le cas du luminaire avec chaîne et pavillon, il faut passé les câbles a travers les maillons de la chaîne, soit s'il est équipé avec un câble conducteur de mise à la terre individuelle (nu ou isolé), soit s'il est équipé avec un câble d'alimentation SPT-1.
- Les appareils ne devraient pas porte plus de poids que celle prévue pour les verres décoratif

• TABLE CONNEXION CABLES:

| Connecter le fil de la maison NOIR ou ROUGE (phase) avec: | Connecter le fil de la maison BLANC (neutre) avec: |
|-----------------------------------------------------------|----------------------------------------------------|
| Noir (Phase) | Blanc (neutre) |
| Fil parallèle (ronde et lisse) | Fil parallèle (carré ou striée) |
| Clair, Marron, Or ou Noir SANS traceur | Clair, Marron, or ou Noir AVEC traceur |
| Fil isolé (autre que Vert) avec conducteur Cuivre | Fil isolé (autre que Vert) avec conducteur Argent |

• CONNEXIONS ÉLECTRIQUES

1. Fixez le fil de terre (vert isolé ou cuivre nu) du circuit d'alimentation au support de montage par la vis vert de fixation de terre fourni.
2. Connectez le fil de mise à la terre du luminaire au conducteur de mise à la terre du circuit d'alimentation. Fixez tous les conducteurs de terre au support de montage avec la vis vert de fixation.
3. Connectez les fils noir et blanc en référant à la table connexion câbles

ATTENTION

Fil libre ou des connexions desserrées ne doivent pas être présents. Fixer avec des connecteurs de fils certifié UL et du ruban électrique.

• INSTALLATION FINALE


1. Installer des ampoules de puissance recommandée, reportez-vous à l'étiquette de remplacement de la lampe situé en proximité de la douille.
2. Ne pas dépasser la puissance recommandée

AVERTISSEMENT

Instructions supplémentaires

Pour la fixation, utiliser les vis fournies et vérifier que le pavillon couvre complètement la boîte de sortie.


En cas de changement d'article, pas autorisé précédemment, la certification UL se terminera immédiatement.

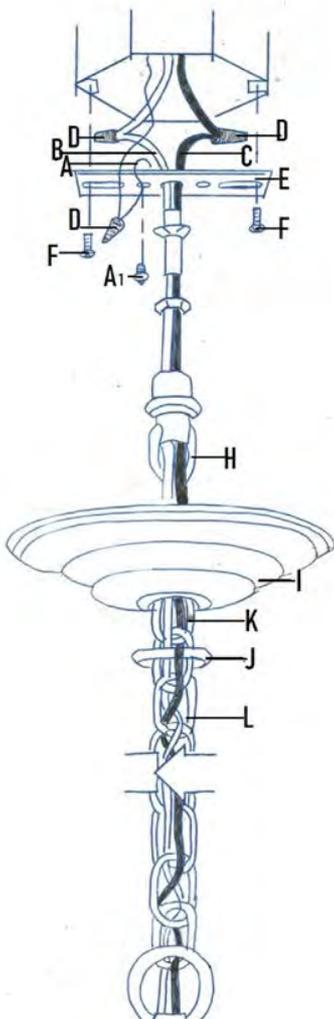

PARTS INVENTORY

| Super Category | Product ID | Description | Stat | Collection | Route |
|----------------|--------------|---------------------------------------------------------|------|------------|-------|
| LIGHTING | 91636COL6B | COLLIER 4 MM 12 FT BRZ CHAIN 12 FT BRONZE CHAIN | A | PT-COLLIER | PART |
| LIGHTING | 91636COL6W | COLLIER 4 MM 12 FT WHITE CHAIN 12 FT ASH WHITE CHAIN | A | PT-COLLIER | PART |
| LIGHTING | 91636COL6B6 | COLLIER 4 MM 6 FT BRZ CHAIN 6 FT BRONZE CHAIN | A | PT-COLLIER | PART |
| LIGHTING | 91636COL6W6 | COLLIER 4 MM 6 FT WHITE CHAIN 6 FT ASH WHITE CHAIN | A | PT-COLLIER | PART |
| LIGHTING | 91636COL8B | COLLIER 5 MM 12 FT BRZ CHAIN 12 FT BRONZE CHAIN | A | PT-COLLIER | PART |
| LIGHTING | 91636COL8W | COLLIER 5 MM 12 FT WHITE CHAIN 12 FT ASH WHITE CHAIN | A | PT-COLLIER | PART |
| LIGHTING | 91636COL8B6 | COLLIER 5 MM 6 FT BRZ CHAIN 6 FT BRONZE CHAIN | A | PT-COLLIER | PART |
| LIGHTING | 91636COL8W6 | COLLIER 5 MM 6 FT WHITE CHAIN 6 FT ASH WHITE CHAIN | A | PT-COLLIER | PART |
| LIGHTING | 91636COL6TC | COLLIER 6 LIGHT TOP CRYSTAL 50 MM CRYSTAL SPHERE | A | PT-COLLIER | PART |
| LIGHTING | 91636COL6CNB | COLLIER 6 LT BRONZE CANOPY CANOPY W/ HARDWARE | A | PT-COLLIER | PART |
| LIGHTING | 91636COL6CNW | COLLIER 6 LT WHITE CANOPY CANOPY W/ HARDWARE | A | PT-COLLIER | PART |
| LIGHTING | 91636COL8TC | COLLIER 8 LIGHT TOP CRYSTAL 60 MM CRYSTAL SPHERE | A | PT-COLLIER | PART |
| LIGHTING | 91636COL8CNB | COLLIER 8 LT BRONZE CANOPY CANOPY W/ HARDWARE | A | PT-COLLIER | PART |
| LIGHTING | 91636COL8CNW | COLLIER 8 LT WHITE CANOPY CANOPY W/ HARDWARE | A | PT-COLLIER | PART |
| LIGHTING | 91636COLBC | COLLIER BOTTOM CRYSTAL 40 MM CRYSTAL SPHERE | A | PT-COLLIER | PART |
| LIGHTING | 91636COLCST | COLLIER CRYSTAL STRAND 39" CRYSTAL STRAND | A | PT-COLLIER | PART |
| LIGHTING | 91636COLFC | COLLIER FLOWER CRYSTAL 20 MM FLOWER CRYSTAL | A | PT-COLLIER | PART |
| LIGHTING | 91636COLCRL | COLLIER LARGE CRYSTAL DROP 76 MM DROP CRYSTAL | A | PT-COLLIER | PART |
| LIGHTING | 91636COL8CL | COLLIER LG CRYSTAL W/ OCT 63 MM DROP W/ OCTOGON | A | PT-COLLIER | PART |
| LIGHTING | 91636COL6CM | COLLIER MD CRYSTAL W/ OCT 50 MM DROP W/ OCTOGON | A | PT-COLLIER | PART |
| LIGHTING | 91636COL8CS | COLLIER SM CRYSTAL W/ OCT 38 MM DROP W/ OCTOGON | A | PT-COLLIER | PART |

CORTENNA TASK FLOOR LAMP

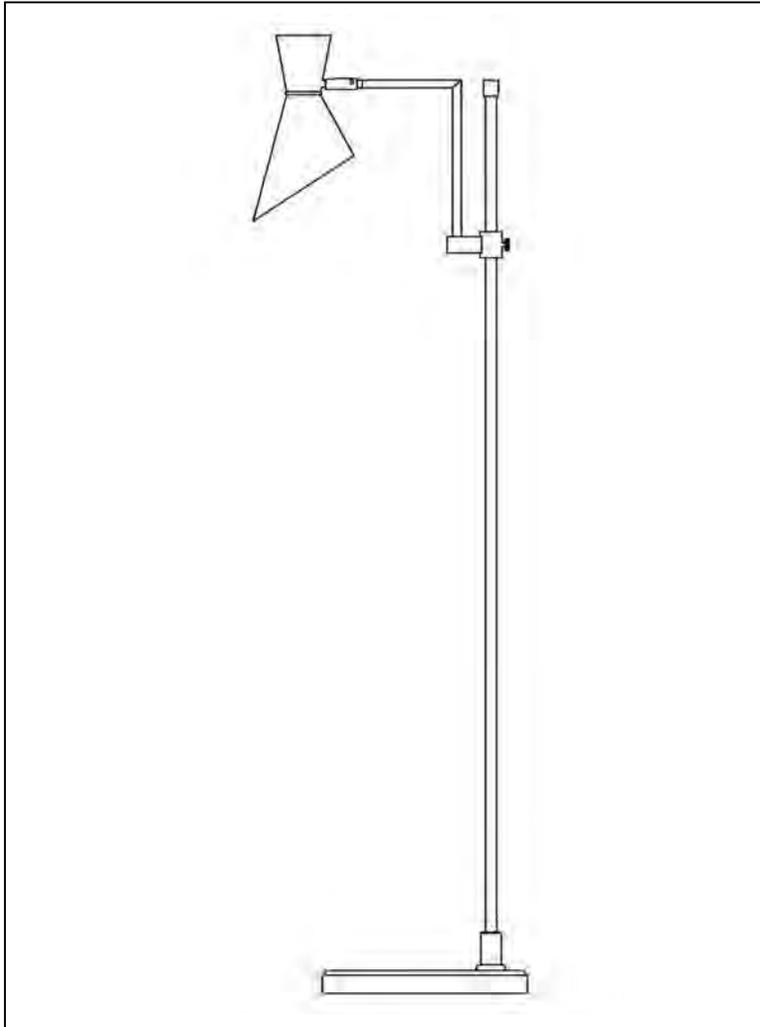parts enclosed:**important safety instructions:**

1. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

UL NO: E310644, UL RATING: DRY, MAX BULB WATTAGE: 40 W
CONVERSION TO MAX LED WATTAGE: 6 W
BULB: 1 X A-19 (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.


to assemble:

1. Carefully remove all parts from the box and remove all protective coverings.
2. Turn OFF power to the circuit breaker where the lamp will be installed.

care instructions:

Do not use polishes or cleaners on your lamp. Just wipe with soft, lint free cloth.

CORTENNA TASK TABLE LAMP

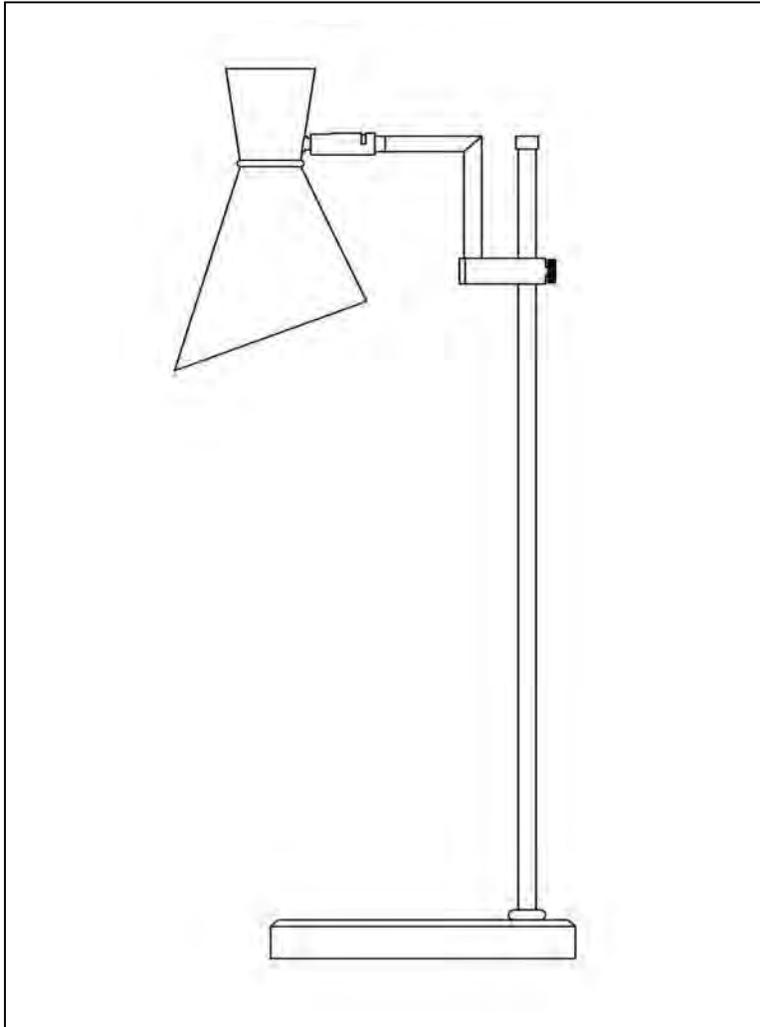parts enclosed:**important safety instructions:**

1. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

UL NO: E310644, UL RATING: DRY, MAX BULB WATTAGE: 40 W
CONVERSION TO MAX LED WATTAGE: 6 W
BULB: 1 X A-19 (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings.
2. Turn OFF power to the circuit breaker where the lamp will be installed.

care instructions:

Do not use polishes or cleaners on your lamp. Just wipe with soft, lint free cloth.


Countess Blue Table Lamp

ARHAUS®

your home

parts enclosed:

| | | |
|---|------------|---|
| A | Finial | 1 |
| B | Lamp Shade | 1 |
| C | Harp | 1 |

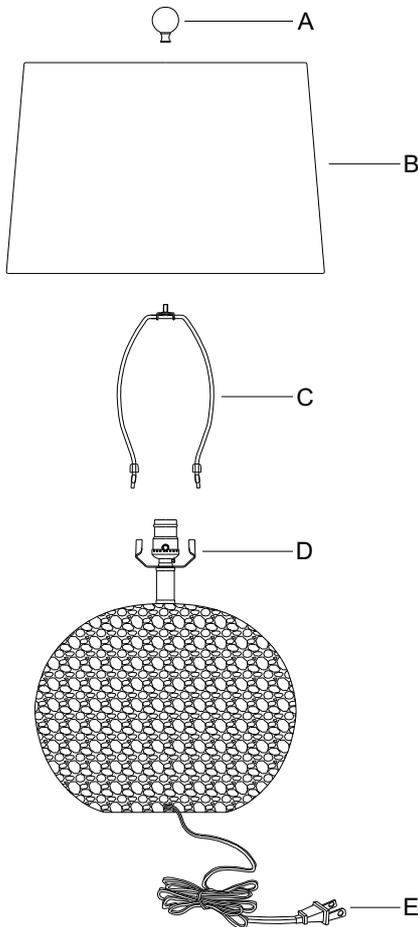

important safety instructions:

This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not attempt to defeat this safety feature.

warnings:

1. To reduce the risk of fire, electrical shock or personal injury, always turn off and unplug the lamp and allow it to cool prior to replacing bulbs.
2. Do not touch the bulbs when the lamp is turned on. Do not look directly at lit bulbs.
3. Keep flammable materials away from lit bulbs.
4. Remove clear shade cover prior to use.
5. This portable lamp is meant for indoor use, dry locations only.
6. This lamp has been rated for up to one 3-way 100-watt maximum TYPE A standard incandescent light bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.
7. Save these instructions.

to assemble:

1. Unpack all parts from carton carefully.
2. Insert the Harp (C) into the Saddle (D) and lower the harp caps until they cover the two-pronged Saddle (D).
3. Unscrew the Finial (A) from the harp top. Place the Shade (B) over the assembled Harp (C), making sure the harp top extends through the hole at the top of the Lamp Shade.
4. Attach the Finial (A) onto the harp top and tighten to secure the Lamp Shade (B).
5. Insert one 3-way 100-watt maximum TYPE A standard incandescent light bulb (not included) into the socket. **DO NOT EXCEED SPECIFIED WATTAGE.**
6. Remove Protective Plastic from Electrical Plug (E).
7. Plug the lamp into proper electrical outlet and test this lamp.


care instructions:

1. Wipe clean with a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the lamp's finish.

Made in China

parts enclosed:

| | | |
|---|------------|---|
| A | Finial | 1 |
| B | Lamp Shade | 1 |
| C | Harp | 1 |

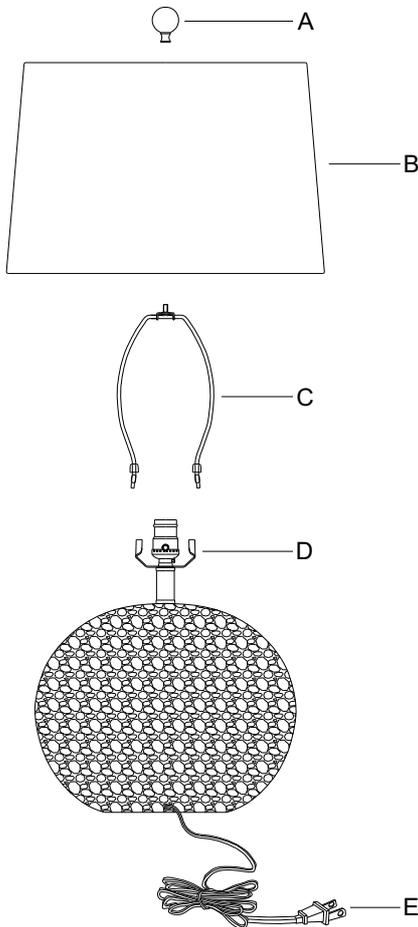

important safety instructions:

This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not attempt to defeat this safety feature.

warnings:

1. To reduce the risk of fire, electrical shock or personal injury, always turn off and unplug the lamp and allow it to cool prior to replacing bulbs.
2. Do not touch the bulbs when the lamp is turned on. Do not look directly at lit bulbs.
3. Keep flammable materials away from lit bulbs.
4. Remove clear shade cover prior to use.
5. This portable lamp is meant for indoor use, dry locations only.
6. This lamp has been rated for up to one (1) 100-Watt maximum Type A standard medium base incandescent light bulb (not included) or one (1) 23-watt compact fluorescent light bulb (not included) or one (1) 20-Watt LED light bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.
7. Remove the silica gel pack from the socket before plugging the lamp in.
8. Save these instructions.

to assemble:

1. Unpack all parts from carton carefully.
2. Insert the Harp (C) into the Saddle (D) and lower the harp caps until they cover the two-pronged Saddle (D).
3. Unscrew the Finial (A) from the harp top. Place the Lamp Shade (B) over the assembled Harp (C), making sure the harp top extends through the hole at the top of the Lamp Shade (B).
4. Attach the Finial (A) onto the harp top and tighten to secure the Lamp Shade (B).
5. Insert ONE (1) 100-watt maximum TYPE A standard medium base incandescent light bulb (not included), or ONE (1) 23-watt maximum compact fluorescent light bulb (not included), or ONE (1) 20-watt maximum LED light bulb (not included) into the socket.
6. Remove protective plastic from the Electrical Plug (E).
7. Plug the lamp into proper electrical outlet and test this lamp.

care instructions:


1. Wipe clean with a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the lamp finish.

Parts Inventory

| Super Category | Product ID | Description | Stat | Collection | Route |
|----------------|-------------|----------------------------------------------------|------|------------|-------|
| LIGHTING | 91594L492F | COUNTESS TABLE LAMP FINIAL MATTE BLACK FINIAL | A | PT-COUNTES | PART |
| LIGHTING | 91594L492H | COUNTESS TABLE LAMP HARP NICKEL HARP | A | PT-COUNTES | PART |
| LIGHTING | 91594L492SH | COUNTESS TABLE LAMP SHADE BEIGE FAUX SILK SHADE | A | PT-COUNTES | |

parts enclosed:

| Part | Description | Qty. | Part | Description | Qty. |
|------|------------------|------|------|------------------------|------|
| A | lock collar | 1 | G | loop | 1 |
| B | mounting bracket | 1 | H | cable | 1 |
| C | nipples | 3 | I | naked earth cable | 1 |
| D | canopy | 1 | J | ceiling loop | 1 |
| E | chain | 1 | K | ferric flower branches | 104 |
| F | open ring | 1 | | | |

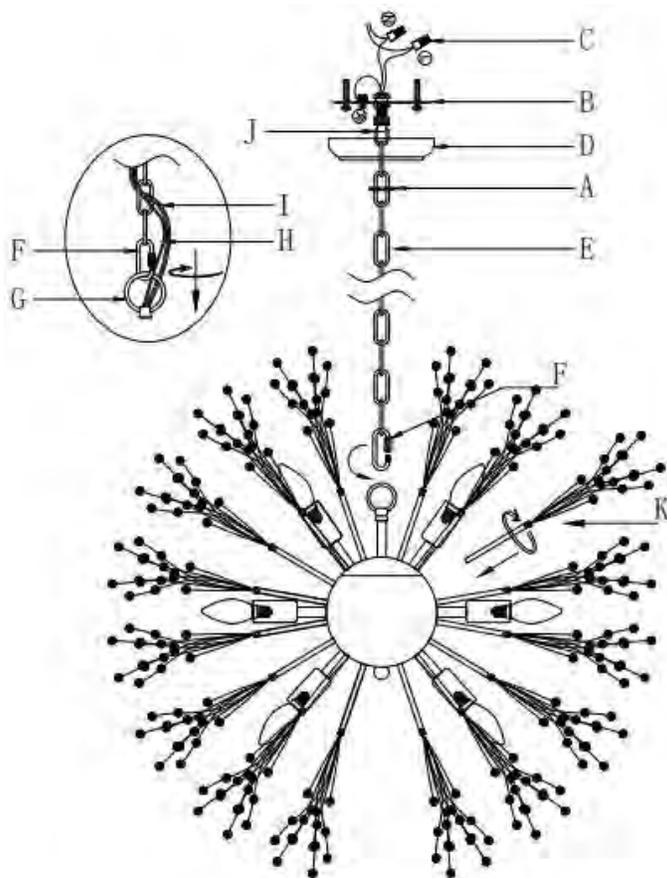

(104 clusters)

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:



1. Carefully remove all parts from the box.
2. Remove the mounting bracket (B) from the canopy (D) by loosening the lock collar (A).
3. Taking off the open ring (F) and use the dimensions of the fixture as a guide, shorten the chain as needed using a pair of chain pliers.
4. Use the open ring (F) to link the chain (E) and the loop (G), then put the cable (H) and naked earth cable (I) through the chain (E) in every 3-4 rings until through the ceiling loop (J).
5. **INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.**
6. Affix the mounting bracket (B) on the outlet box.
7. Wrap both safety cable with nipples (C), push the cable into the outlet box.
8. Attach the canopy (D) to the mounting bracket (B) and secure with lock collar (A).
9. Install the ferric flower branch (K) on the lamp body.
10. Install the bulbs on the sockets.
11. Installation is complete, turn on power at fuse or circuit breaker.

care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

parts enclosed:

| Part | Description | Qty. | Part | Description | Qty. |
|------|------------------|------|------|------------------------|------|
| A | lock collar | 1 | G | loop | 1 |
| B | mounting bracket | 1 | H | cable | 1 |
| C | nipples | 3 | I | naked earth cable | 1 |
| D | canopy | 1 | J | ceiling loop | 1 |
| E | chain | 1 | K | ferric flower branches | 55 |
| F | open ring | 1 | | | |

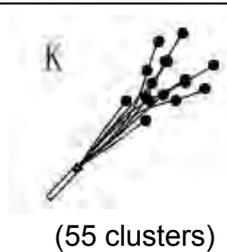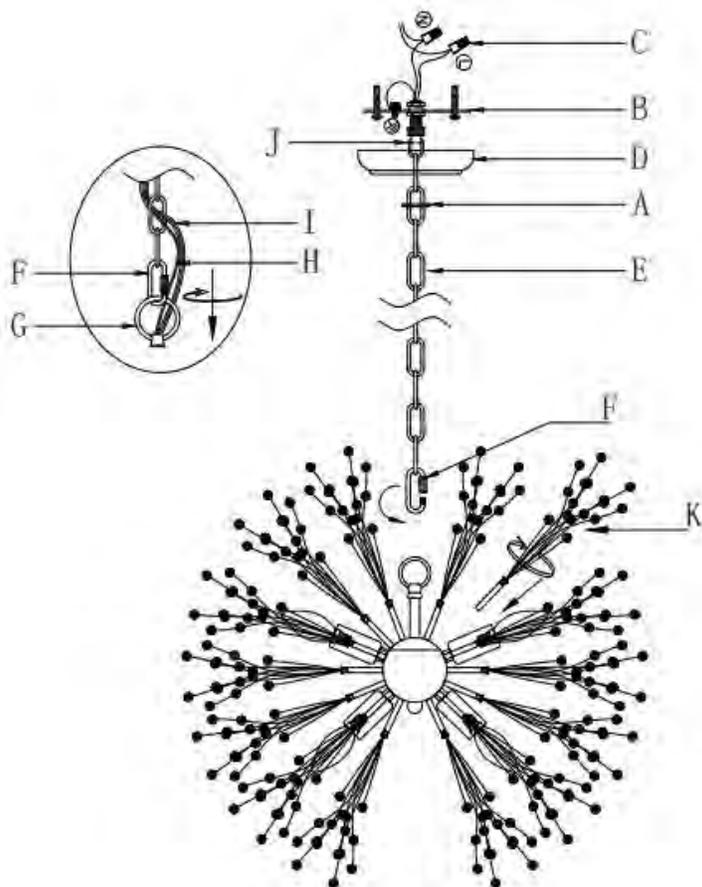

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:


1. Carefully remove all parts from the box.
2. Remove the mounting bracket (B) from the canopy (D) by loosening the lock collar (A).
3. Taking off the open ring (F) and use the dimensions of the fixture as a guide, shorten the chain as needed using a pair of chain pliers.
4. Use the open ring (F) to link the chain (E) and the loop (G), then put the cable (H) and naked earth cable (I) through the chain (E) in every 3-4 rings until through the ceiling loop (J).
5. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
6. Affix the mounting bracket (B) on the outlet box.
7. Wrap both safety cable with nipples (C), push the cable into the outlet box.
8. Attach the canopy (D) to the mounting bracket (B) and secure with lock collar (A).
9. Install the ferric flower branch (K) on the lamp body.
10. Install the bulbs on the sockets.
11. Installation is complete, turn on power at fuse or circuit breaker.

care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

parts enclosed:

| Part | Description | Qty. | Part | Description | Qty. |
|------|------------------|------|------|------------------------|------|
| A | lock collar | 1 | G | loop | 1 |
| B | mounting bracket | 1 | H | cable | 1 |
| C | nipples | 3 | I | naked earth cable | 1 |
| D | canopy | 1 | J | ceiling loop | 1 |
| E | chain | 1 | K | ferric flower branches | 55 |
| F | open ring | 1 | | | |

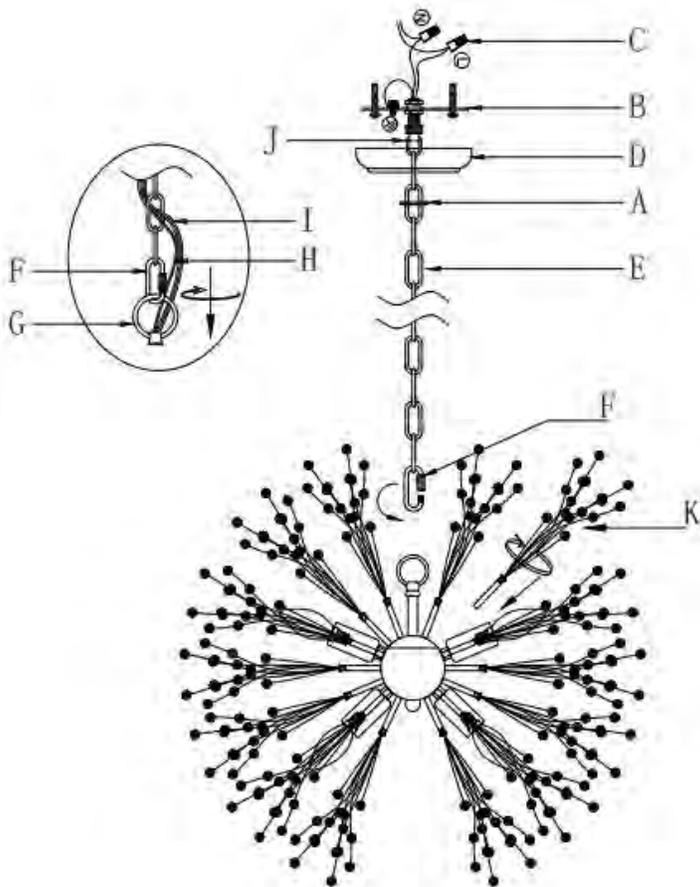

(55 clusters)

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:


1. Carefully remove all parts from the box.
2. Remove the mounting bracket (B) from the canopy (D) by loosening the lock collar (A).
3. Taking off the open ring (F) and use the dimensions of the fixture as a guide, shorten the chain as needed using a pair of chain pliers.
4. Use the open ring (F) to link the chain (E) and the loop (G), then put the cable (H) and naked earth cable (I) through the chain (E) in every 3-4 rings until through the ceiling loop (J).
5. **INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.**
6. Affix the mounting bracket (B) on the outlet box.
7. Wrap both safety cable with nipples (C), push the cable into the outlet box.
8. Attach the canopy (D) to the mounting bracket (B) and secure with lock collar (A).
9. Install the ferric flower branch (K) on the lamp body.
10. Install the bulbs on the sockets.
11. Installation is complete, turn on power at fuse or circuit breaker.

care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

parts enclosed:

| Part | Description | Qty. | Part | Description | Qty. |
|------|------------------|------|------|------------------------|------|
| A | lock collar | 1 | G | loop | 1 |
| B | mounting bracket | 1 | H | cable | 1 |
| C | nipples | 3 | I | naked earth cable | 1 |
| D | canopy | 1 | J | ceiling loop | 1 |
| E | chain | 1 | K | ferric flower branches | 104 |
| F | open ring | 1 | | | |

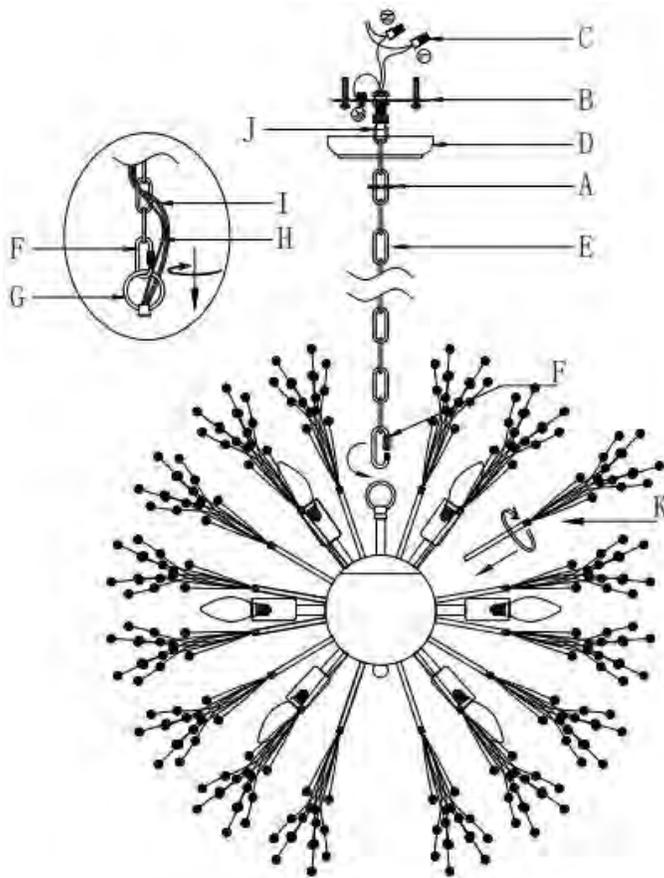

(104 clusters)

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:


1. Carefully remove all parts from the box.
2. Remove the mounting bracket (B) from the canopy (D) by loosening the lock collar (A).
3. Taking off the open ring (F) and use the dimensions of the fixture as a guide, shorten the chain as needed using a pair of chain pliers.
4. Use the open ring (F) to link the chain (E) and the loop (G), then put the cable (H) and naked earth cable (I) through the chain (E) in every 3-4 rings until through the ceiling loop (J).
5. **INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.**
6. Affix the mounting bracket (B) on the outlet box.
7. Wrap both safety cable with nipples (C), push the cable into the outlet box.
8. Attach the canopy (D) to the mounting bracket (B) and secure with lock collar (A).
9. Install the ferric flower branch (K) on the lamp body.
10. Install the bulbs on the sockets.
11. Installation is complete, turn on power at fuse or circuit breaker.

care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

parts enclosed:

| Part | Description | Qty. |
|------|------------------------|------|
| A | screws | 2 |
| B | mounting bracket | 1 |
| C | nipples | 3 |
| D | canopy | 1 |
| E | ferric flower branches | 47 |

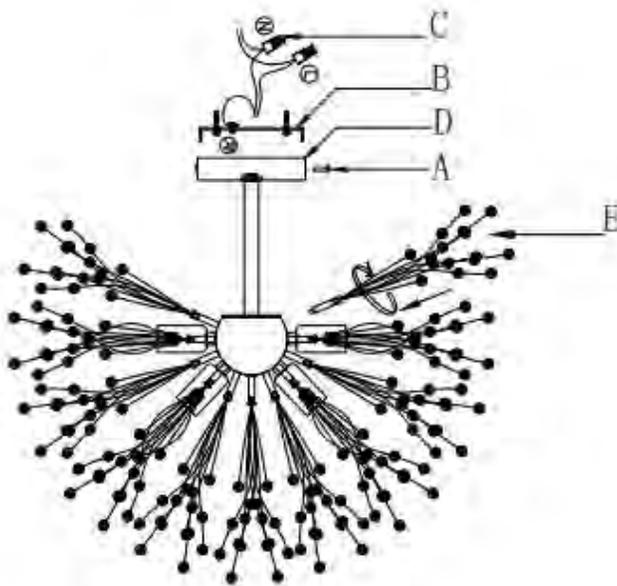

(47 clusters)

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:


1. Carefully remove all parts from the box.
2. Remove the mounting bracket (B) from canopy (D) by loosening screws (A).
3. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
4. Affix the mounting bracket (B) on the outlet box.
5. Wrap both safety cable with nipples (C), push the cable into the outlet box.
6. Attach the canopy (D) to the mounting bracket (B) and secure with screws (A).
7. Install the ferric flower branch (E) on the lamp body.
8. Install the bulbs on the sockets.
9. Installation is complete, turn on power at fuse or circuit breaker.

care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

parts enclosed:

| Part | Description | Qty. |
|------|------------------------|------|
| A | screws | 2 |
| B | mounting bracket | 1 |
| C | connectors | 2 |
| D | canopy | 1 |
| E | ferric flower branches | 47 |

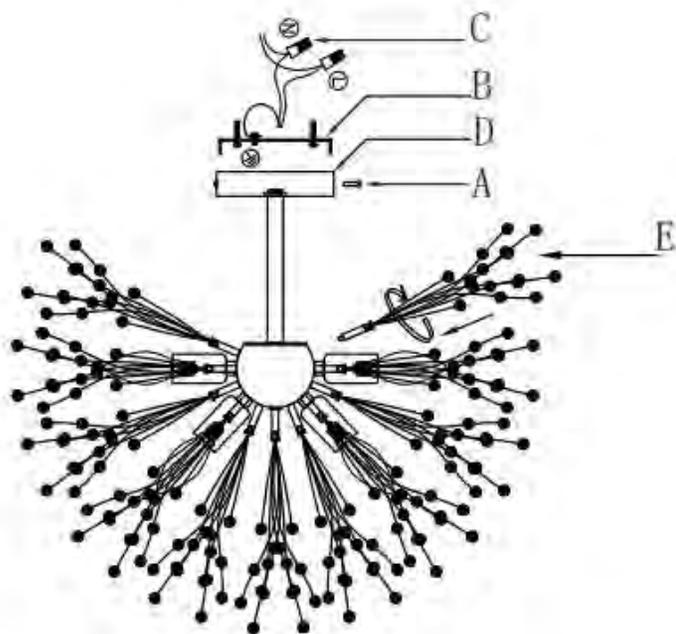

important safety instructions:


1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box.
2. Remove mounting bracket (B) from canopy (D) by loosening screws (A).
3. Make sure the power is turned off.
4. Fix the mounting bracket (B) on the socket box.
5. Wrap the two safety cables with connector (C) and push the cables into the outlet cable box.
6. Connect canopy (D) to mounting bracket (B) and secure with screws (A).
7. Install the ferric flower branch (E) on the lamp body.
8. Put the bulb in the socket.
9. Installation is complete, turn on power at fuse or circuit breaker.

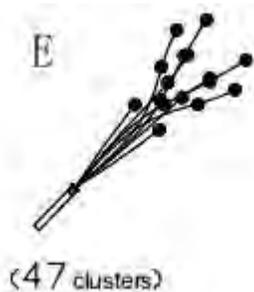


care instructions:

Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

Dawson Brass Table Lamp 66594L284

parts enclosed:

| | | |
|---|------------|---|
| A | Finial | 1 |
| B | Lamp Shade | 1 |
| C | Harp | 1 |

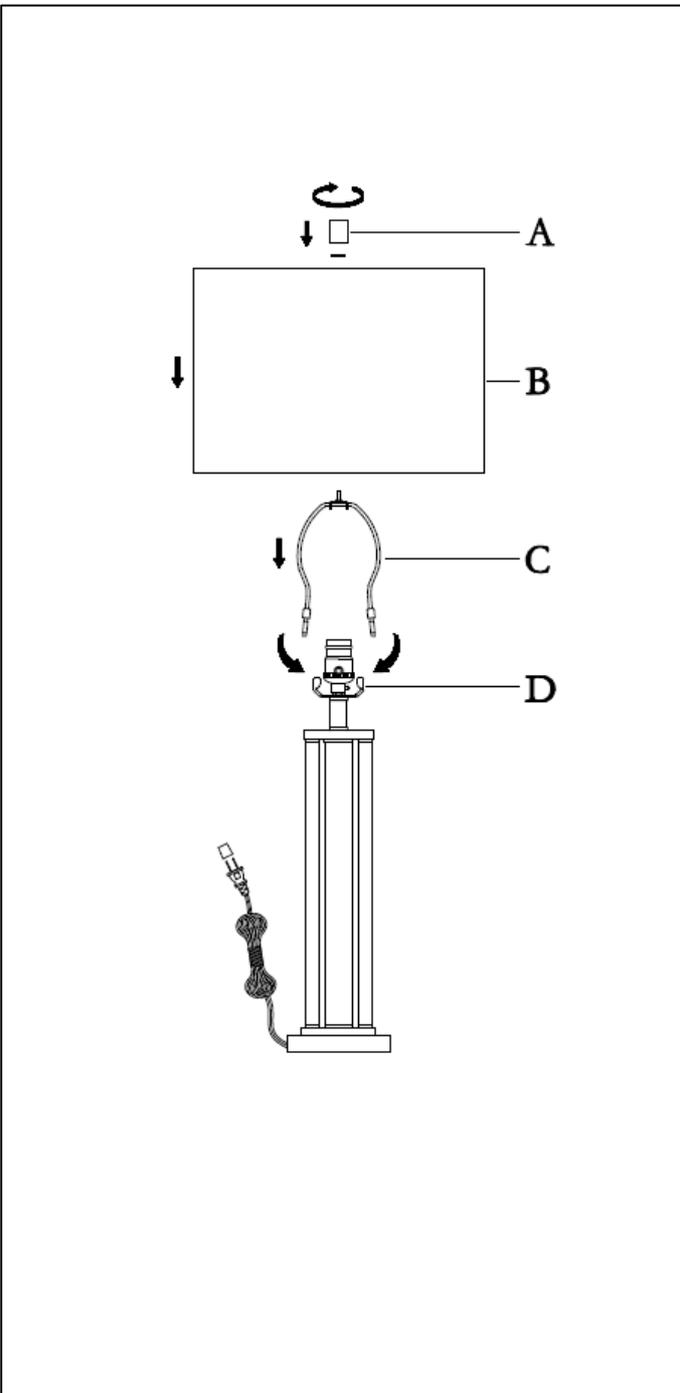

important safety instructions:

1. To avoid the risk of fire, do not exceed the recommended wattage.
2. This portable lamp has a polarized plug as a safety feature to reduce the risk of electric shock (one blade is wider than the other). This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not attempt to defeat this safety feature.

warnings:

1. Do not remove the lamp from packaging by pulling on the power cord as a bad connection or damage may result.
2. To reduce the risk of fire, electrical shock or personal injury, turn off the lamp and allow it to cool prior to replacing the light bulb.
3. Do not touch the bulb when the lamp is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.
5. Remove the clear shade cover prior to use.
6. This portable lamp is meant for indoor use, dry locations only.
7. This lamp has been rated for up to one (1) 100-Watt maximum Type A standard medium base incandescent light bulb (not included) or one (1) 23-watt compact fluorescent light bulb (not included) or one (1) 20-Watt LED light bulb (not included).
8. Remove the silica gel pack from the socket before plugging the lamp in.
9. Save these instructions.

to assemble:

1. Unpack all the parts from carton carefully.
2. Insert the Harp (C) into the Saddle (D) and lower the harp caps until they cover the two-pronged Saddle (D).
3. Unscrew the Finial (A) from the harp top. Place the Shade (B) over the assembled Harp (C), making sure the harp top extends through the hole at the top of the Lamp Shade (B).
4. Attach the Finial (A) onto the harp top and tighten to secure the Lamp Shade (B).
5. Insert ONE (1) 100-watt maximum TYPE A standard medium base incandescent light bulb (not included), or ONE (1) 23-watt maximum compact fluorescent light bulb (not included), or ONE (1) 20-watt maximum LED light bulb (not included) into the socket.
6. Remove the protective plastic from the electrical plug.
7. Plug the lamp into the proper electrical outlet and test this lamp.

care instructions:

1. Wipe clean with a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the lamp finish.

Dawson Nickel Table Lamp 66594L283

parts enclosed:

| | | |
|---|------------|---|
| A | Finial | 1 |
| B | Lamp Shade | 1 |
| C | Harp | 1 |

important safety instructions:

1. To avoid the risk of fire, do not exceed the recommended wattage.
2. This portable lamp has a polarized plug as a safety feature to reduce the risk of electric shock (one blade is wider than the other). This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not attempt to defeat this safety feature.

warnings:


1. Do not remove the lamp from packaging by pulling on the power cord as a bad connection or damage may result.
2. To reduce the risk of fire, electrical shock or personal injury, turn off the lamp and allow it to cool prior to replacing the light bulb.
3. Do not touch the bulb when the lamp is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.
5. Remove the clear shade cover prior to use.
6. This portable lamp is meant for indoor use, dry locations only.
7. This lamp has been rated for up to one (1) 100-Watt maximum Type A standard medium base incandescent light bulb (not included) or one (1) 23-watt compact fluorescent light bulb (not included) or one (1) 20-Watt LED light bulb (not included).
8. Remove the silica gel pack from the socket before plugging the lamp in.
9. Save these instructions.

to assemble:



1. Unpack all the parts from carton carefully.
2. Insert the Harp (C) into the Saddle (D) and lower the harp caps until they cover the two-pronged Saddle (D).
3. Unscrew the Finial (A) from the harp top. Place the Shade (B) over the assembled Harp (C), making sure the harp top extends through the hole at the top of the Lamp Shade (B).
4. Attach the Finial (A) onto the harp top and tighten to secure the Lamp Shade (B).
5. Insert ONE (1) 100-watt maximum TYPE A standard medium base incandescent light bulb (not included), or ONE (1) 23-watt maximum compact fluorescent light bulb (not included), or ONE (1) 20-watt maximum LED light bulb (not included) into the socket.
6. Remove the protective plastic from the electrical plug.
7. Plug the lamp into the proper electrical outlet and test this lamp.


care instructions:

1. Wipe clean with a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the lamp finish.

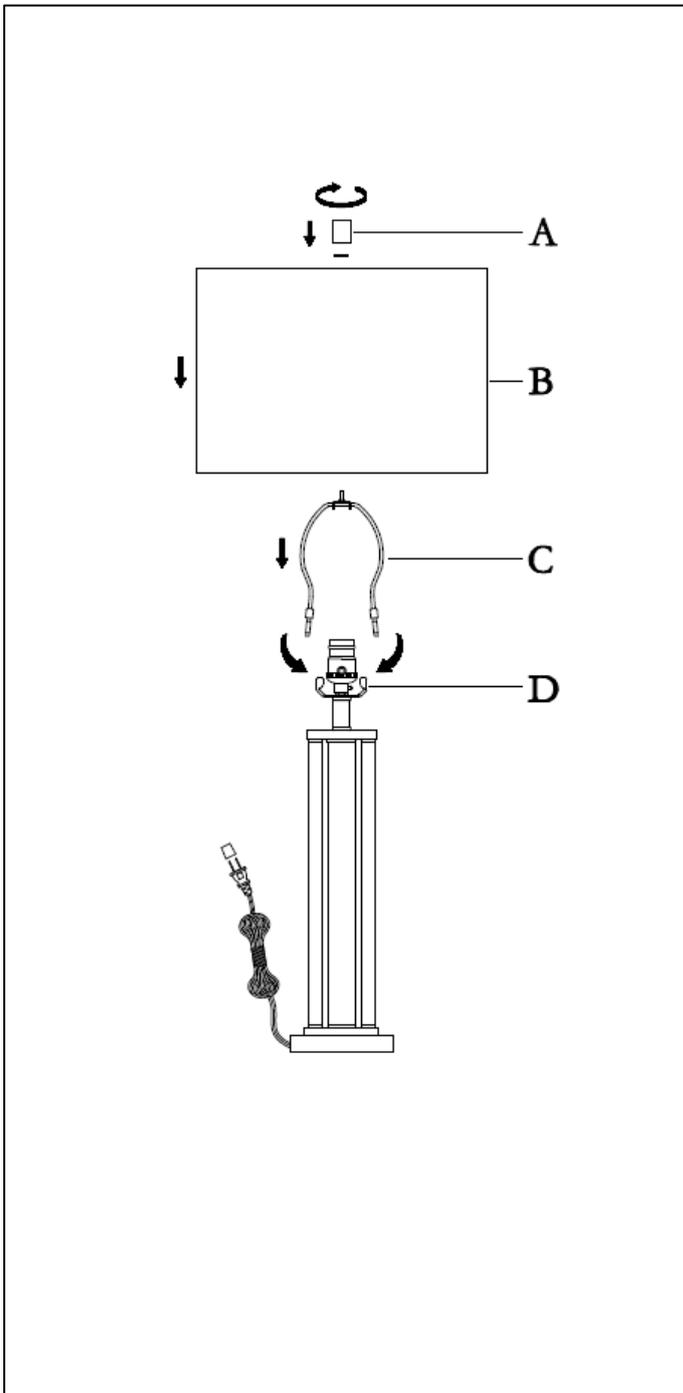

parts enclosed:

| ITEM | DIAGRAM | DESCRIPTION | QTY |
|------|-------------------------------------------------------------------------------------|---------------------------|-----|
| (A) |  | Finial | 1 |
| (B) |  | Fabric Shade | 1 |
| (C) |  | Light Bulb (not included) | 1 |
| (D) |  | Harp | 1 |
| (E) |  | Metal Ring | 6 |
| (F) |  | Glass Shade | 3 |
| (G) |  | Glass Shade | 2 |
| (H) |  | Socket | 1 |
| (I) |  | Pipe | 1 |

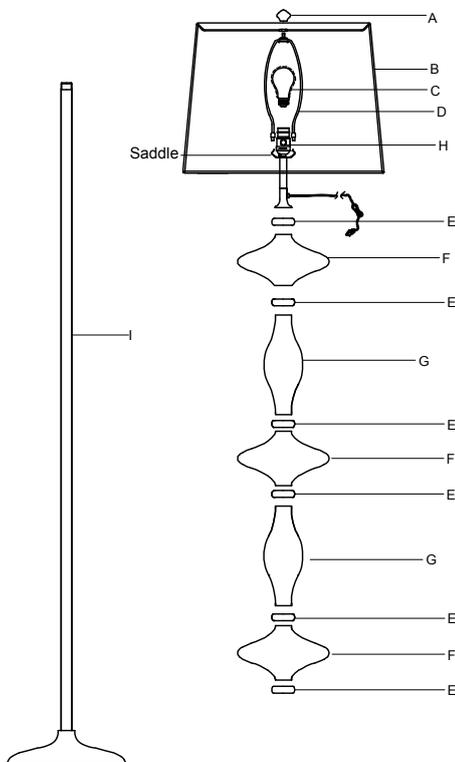

important safety instructions:

1. This portable luminaire has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.
2. To avoid the risk of fire, do not exceed the recommended wattage for this lamp.

warnings:

1. All wires are connected. When unpacking, be carefully not to remove the lamp from packaging by pulling on the power cord as a bad connection may result. Do not connect electricity until the lamp is fully assembled.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off fixture and allow it to cool prior to replace the bulb.
3. Do not touch bulb when lamp is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.


to assemble:


1. Carefully remove all parts from the box and remove all plastic coverings.
2. Place the Metal Ring (E) and Glass Shades (F and G) through the Pipe (I) as shown in the diagram.
3. Thread the Socket (H) onto the top of the Pipe (I).
4. Insert Harp (D) into the saddle.
5. Install the Light Bulb (not included) into the Socket (H).
6. Remove the Finial (A) by unscrewing it in counterclockwise direction.
7. Place the Fabric Shade (B) onto the Harp (D) and secure the Fabric Shade (B) by screwing the Finial (A) in clockwise direction.
8. Assembly is complete.
9. Plug fixture into proper electrical outlet and turn the fixture on and off using the switch to test the functionality of the lamp.

care instructions:

Wipe all surfaces with a soft, dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives on our lamp, as they will damage the finish.

parts enclosed:

| ITEM | DIAGRAM | DESCRIPTION | QTY |
|------|------------------------------------------------------------------------------------|---------------------------|-----|
| (A) |  | Finial | 1 |
| (B) |  | Fabric Shade | 1 |
| (C) |  | Light Bulb (not included) | 1 |
| (D) |  | Harp | 1 |
| (E) |  | Metal Ring | 4 |
| (F) |  | Glass Shade | 2 |
| (G) |  | Glass Shade | 1 |
| (H) |  | Socket | 1 |
| (I) |  | Pipe | 1 |

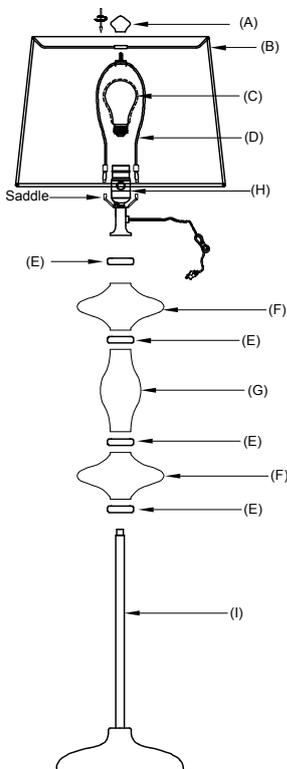

important safety instructions:

1. This portable luminaire has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.
2. To avoid the risk of fire, do not exceed the recommended wattage for this lamp.

warnings:

1. All wires are connected. When unpacking, be carefully not to remove the lamp from packaging by pulling on the power cord as a bad connection may result. Do not connect electricity until the lamp is fully assembled.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off fixture and allow it to cool prior to replace the bulb.
3. Do not touch bulb when lamp is turned on or look directly at lit bulb. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Place the Metal Ring (E) and Glass Shades (F and G) through the Pipe (I) as shown in the diagram.
3. Thread the Socket (H) onto the top of the Pipe (I).
4. Insert Harp (D) into the saddle.
5. Install the Light Bulb (not included) into the Socket (H).
6. Remove the Finial (A) by unscrewing it in counterclockwise direction.
7. Place the Fabric Shade (B) onto the Harp (D) and secure the Fabric Shade (B) by screwing the Finial (A) in clockwise direction.
8. Assembly is complete.
9. Plug fixture into proper electrical outlet and turn the fixture on and off using the switch to test the functionality of the lamp.


care instructions:

Wipe all surfaces with a soft, dry cloth. Do not use any harsh cleaners (including ammonia-based products) or abrasives on our lamp, as they will damage the finish.

DIVYA TABLE LAMP

parts enclosed:

- A. Finial (1)
- B. Harp (1)

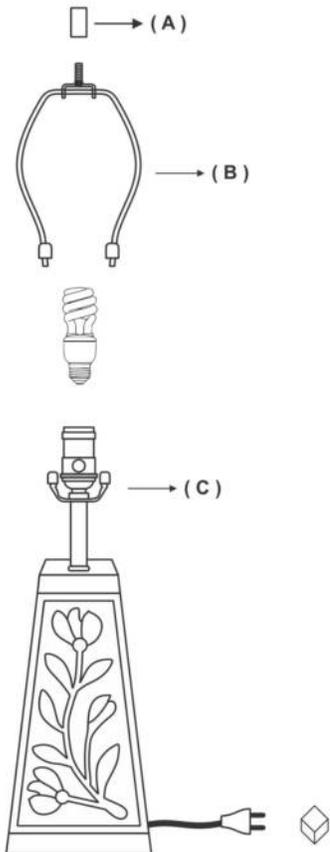**important safety instructions:**

1. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

UL NO: E310644, UL RATING: DRY, MAX BULB WATTAGE: 60 W
 CONVERSION TO MAX LED WATTAGE: 12 W
 BULB: 1 X A-19 (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings.
2. Turn OFF power to the circuit breaker where the lamp will be installed.
3. Attach harp (B) to the saddle (C).
4. Unscrew finial (A) place shade on harp (B) and tighten finial (A) to harp (B).
5. Restore power to the circuit breaker and test lamp fixture.


care instructions:

Do not use polishes or cleaners on your lamp. Just wipe with soft, lint free cloth.

DIVYA BLACK TABLE LAMP

parts enclosed:

- A. Finial (1)
- B. Harp (1)

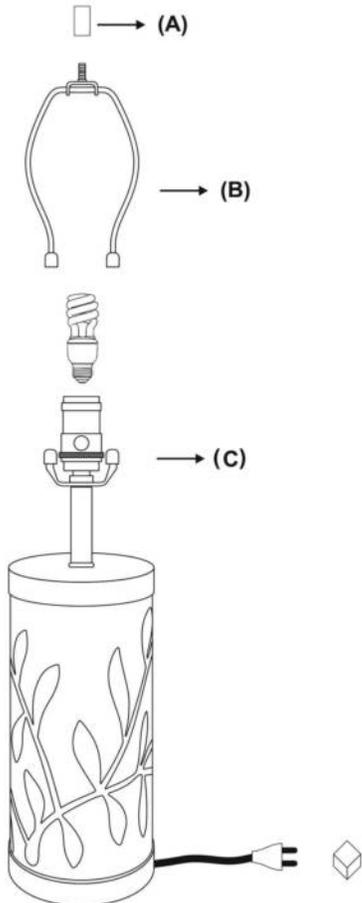**important safety instructions:**

1. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

UL NO: E310644, UL RATING: DRY, MAX BULB WATTAGE: 60 W
 CONVERSION TO MAX LED WATTAGE: 12 W
 BULB: 1 X A-19 (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:


1. Carefully remove all parts from the box and remove all protective coverings.
2. Turn OFF power to the circuit breaker where the lamp will be installed.
3. Attach harp (B) to the saddle (C).
4. Unscrew finial (A) place shade on harp (B) and tighten finial (A) to harp (B).
5. Restore power to the circuit breaker and test lamp fixture.

care instructions:

Do not use polishes or cleaners on your lamp. Just wipe with soft, lint free cloth.

PARTS ENCLOSED:

- (A) Mounting Plate (1)
- (B) Back Plate (1)
- (C) Arm (2)
- (D) Plastic Wire Connector (3)
- (E) Green Ground Screw (1)
- (F) Mounting Screw (2)
- (G) Screw (2)

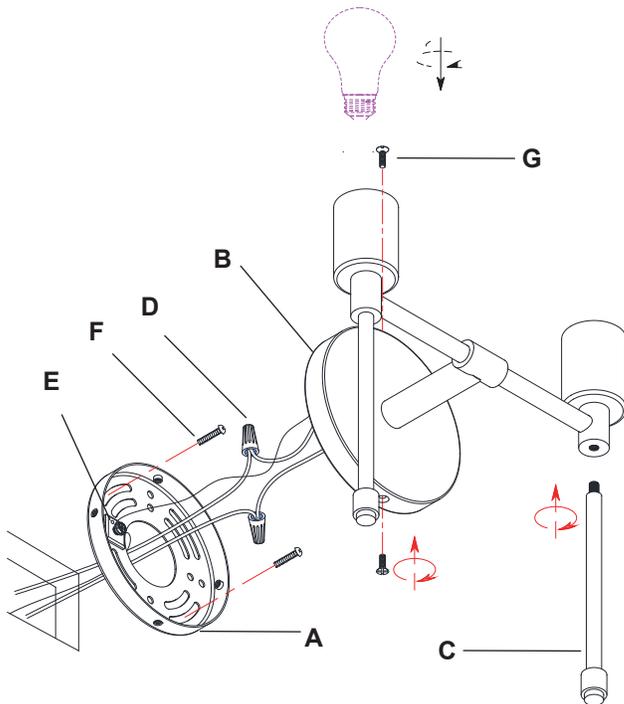

IMPORTANT SAFETY INSTRUCTIONS:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

WARNINGS:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

TO ASSEMBLE:


1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
3. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (Usually green or bare wire). Or wrap the fixture's ground wire around Green ground screw (E), and then fix the green ground screw into the Mounting plate (A).
4. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (D) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a Plastic wire connector (D) and wrap the connection with electrical tape.
5. Attach the Mounting plate (A) to the outlet box using the Mounting screws (F). Tighten with a screwdriver.
6. Attach the Back Plate (B) to the Mounting plate (A) using the Screws (G) and tighten with a screwdriver.
7. Insert the Arm (C) and turn clockwise until tight.
8. Insert the 40-watt bulbs (not included) into the sockets.
9. Restore power to the junction box and test lamp fixture.
10. Installation is complete.

CARE INSTRUCTIONS:

1. Wipe clean using a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals and abrasives to clean light fixture as they may damage the finish.

PARTS ENCLOSED:

- (A) Mounting Plate (1)
- (B) Canopy (1)
- (C) Ring (1)
- (D) Allen Key (1)
- (E) Extension rod (6)
- (F) Plastic Wire Connector (3)
- (G) Green Ground Screw (1)
- (H) Mounting Screw (2)
- (I) Arm (5)
- (J) Bar (10)

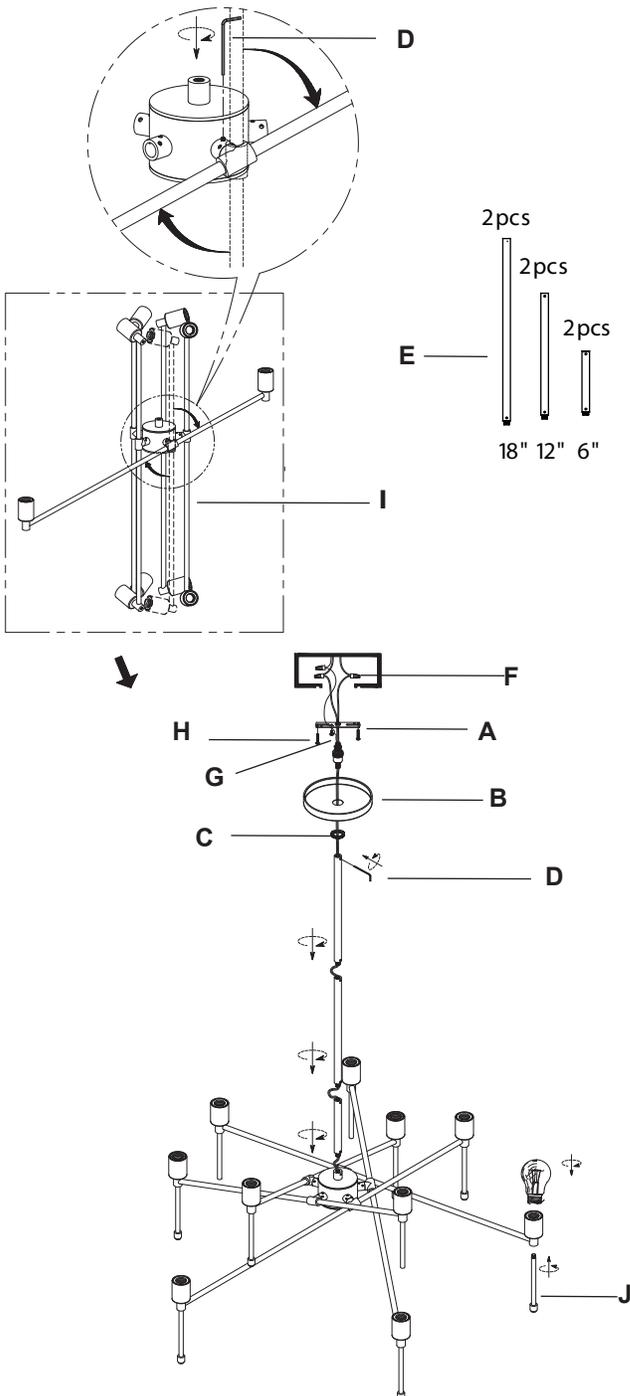

IMPORTANT SAFETY INSTRUCTIONS:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

WARNINGS:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

TO ASSEMBLE:



1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
3. Determine the desired hanging height of lighting fixture from ceiling. If necessary, disassemble the existing suspension rod by unscrewing the sections apart. Guide wiring carefully through the Extension rod(s) (E) and thread the Extensions rod(s) (E) together to light fixture body accordingly. Secure the Extensions rod(s) using the Allen Key (D) provided.
4. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (Usually green or bare wire). Or wrap the fixture's ground wire around Green ground screw (G), and then fix the green ground screw into the Mounting plate (A).
5. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (F) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a Plastic wire connector (F) and wrap the connection with electrical tape.
6. Attach the Mounting plate (A) to the outlet box using the Mounting screws (H). Tighten with a screwdriver.
7. Attach the Canopy (B) to the Mounting plate (A) using the Ring (C) and tighten it.
8. Rotate the Arm (I) to find a desired position and tighten the arm by using the Allen key (D) provided.
9. Insert the 40-watt bulbs (not included) into the sockets.
10. Insert the Bar (J) and turn clockwise until tight.
11. Restore power to the junction box and test lamp fixture.
12. Installation is complete.

CARE INSTRUCTIONS:

1. Wipe clean using a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals and abrasives to clean light fixture as they may damage the finish.

PARTS ENCLOSED:

- (A) Mounting Plate (1)
- (B) Back Plate (1)
- (C) Plate Screw (4)
- (D) Allen Key (1)
- (E) Extension rod (12)
- (F) Plastic Wire Connector (3)
- (G) Green Ground Screw (1)
- (H) Mounting Screw (2)
- (I) Anchor (4)
- (J) Arm (12)
- (K) Anchor Screw (4)
- (L) Nut (2)

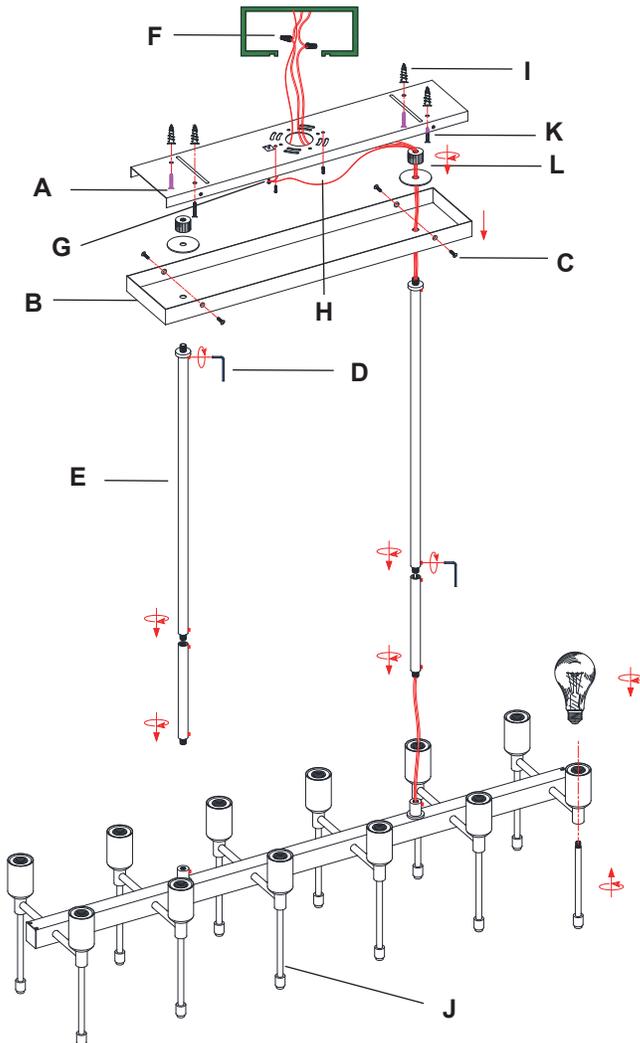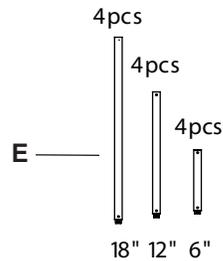**IMPORTANT SAFETY INSTRUCTIONS:**

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

WARNINGS:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware. Lay items out on a clear workspace.
3. Determine the desired hanging height of lighting fixture from ceiling. If necessary, disassemble the existing suspension rod by unscrewing the sections apart. Guide wiring carefully through the Extension rod(s) (E) and thread the Extensions rod(s) (E) together to light fixture body accordingly. Secure the Extensions rod(s) (E) using the Allen Key (D) provided and fasten with Nut (L).
4. Mark the location of the mounting plate holes on the ceiling using a pencil. Using the marks as a guide, drill holes for the Anchor (I). Insert the Anchor (I) into the holes. Using a hammer to fully insert until flush with the ceiling.
5. Attach the ground wire from the fixture to the ground junction box wire from the outlet box (Usually green or bare wire). Or wrap the fixture's ground wire around Green ground screw (G), and then fix the green ground screw into the Mounting plate (A).
6. Connect the hot wire to the hot junction box wire (usually black or smooth) with a plastic wire connector (F) and wrap the connection with electrical tape. Connect the neutral wire to the neutral junction box wire (usually white or ribbed) with a Plastic wire connector (F) and wrap the connection with electrical tape.
7. Attach the Mounting plate (A) to the ceiling outlet box using the Mounting screws (H). Fasten the Anchor screws (K) to the Anchors (d). Tighten with a screwdriver.
8. Attach the Back Plate (B) to the Mounting plate (A) using the Plate screw (C) and tighten it.
9. Insert the 40-watt bulbs (not included) into the sockets.
10. Insert the Arm (J) and turn clockwise until tight.
11. Restore power to the junction box and test lamp fixture.
12. Installation is complete.



CARE INSTRUCTIONS:

1. Wipe clean using a soft, dry cloth or static duster.
2. Always avoid the use of harsh chemicals and abrasives to clean light fixture as they may damage the finish.

6610146H565 / 6610146H562 - ELEONORA WALL SCONCE-2 LIGHT

parts enclosed:

| Part | Description | Qty. |
|------|---------------|------|
| A | Back Plate | 1 |
| B | Finials | 2 |
| C | Washers | 2 |
| D | Nipples | 3 |
| E | Candle sleeve | 2 |
| | | |
| | | |

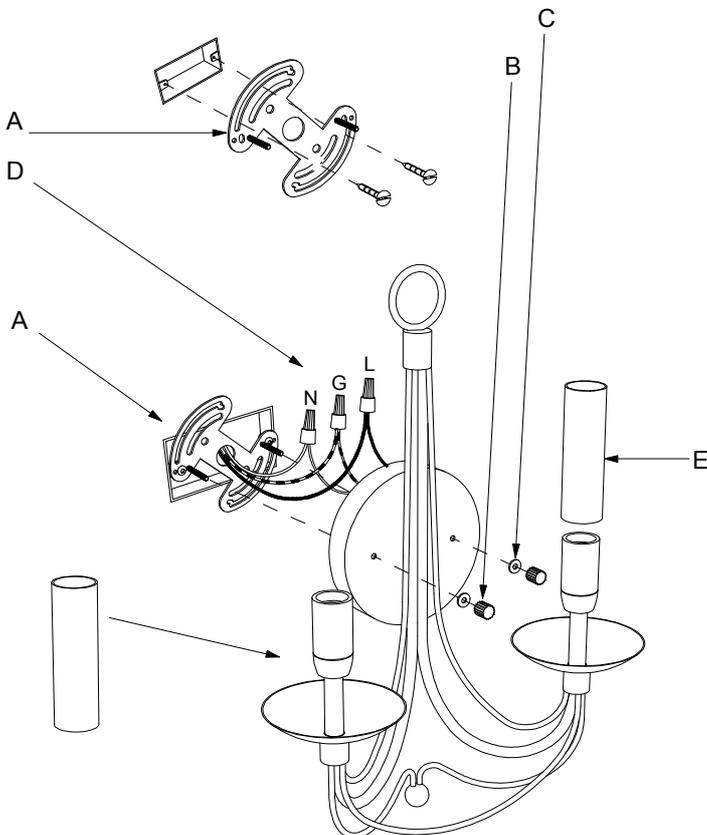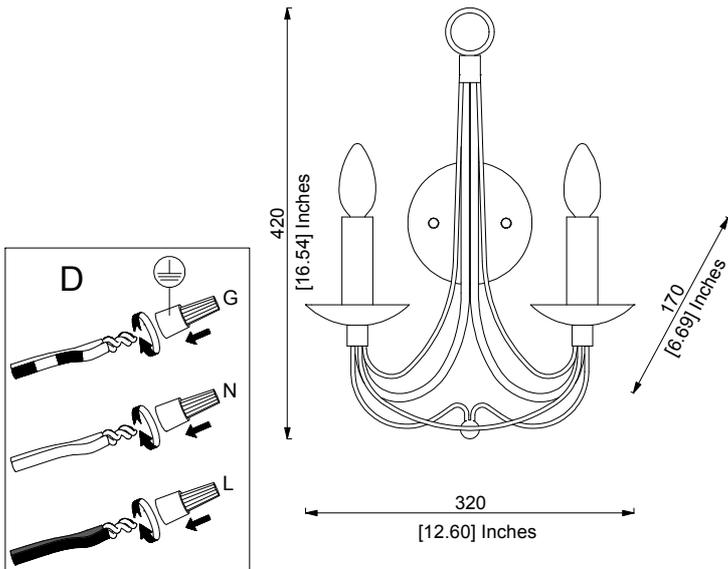

Carefully crafted by Italian artisans, this product is entirely made by hand. Individual pieces may vary in color, pattern, shape, and texture, making each truly unique.

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

UL RATING: DRY, BULB WATTAGE 60W
BULB: 1x TYPE (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixtures is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings.
2. Shut OFF power to the circuit breaker where the wall sconce be installed.
3. Remove the back plate (A) from the base by unscrewing the two finials (B) and the two washers (C).
4. Affix the back plate (A) onto the outlet box.
5. Wrap both safety cables with nipples (D). Push the cables into the outlet box.
6. After fixing the back plate (A) onto the outlet box, fix the base of the wall sconce with finials (B) and the washers (C).
7. Install the candle sleeves (E) over the sockets.
8. Install the bulbs (not included) on the sockets.
9. Restore power to the circuit breaker and test wall sconce.
10. Installation is complete.



care instructions:

Clean with a dry, soft cloth only. Do not use any harsh abrasives or chemical agents

6610146H566 / 6610146H563 - ELEONORA WALL SCONCE-3 LIGHT

parts enclosed:

| Part | Description | Qty. |
|------|---------------|------|
| A | Back Plate | 1 |
| B | Finials | 2 |
| C | Washers | 2 |
| D | Nipples | 3 |
| E | Candle sleeve | 3 |
| | | |
| | | |

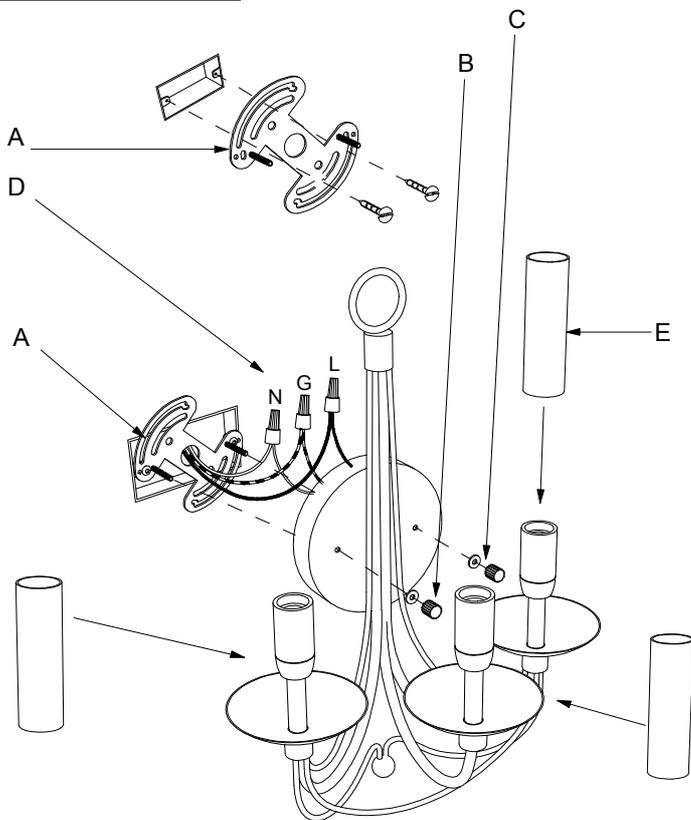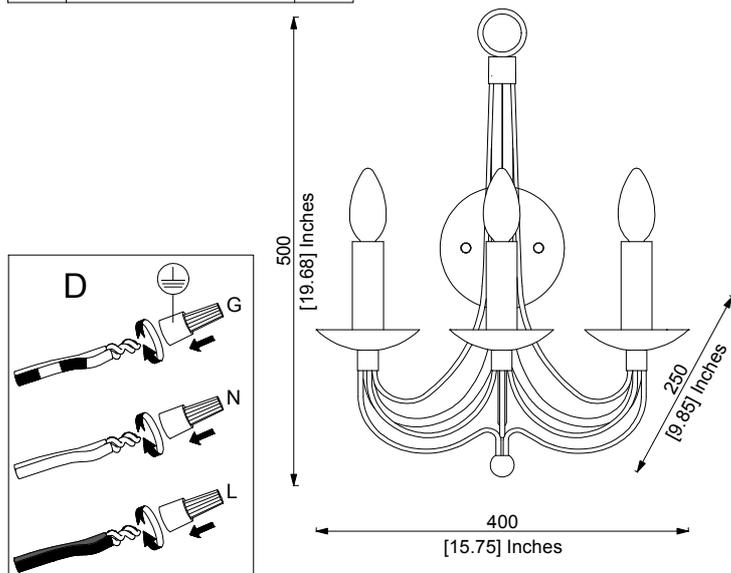

Carefully crafted by Italian artisans, this product is entirely made by hand. Individual pieces may vary in color, pattern, shape, and texture, making each truly unique.

important safety instructions:

1. We recommend installation by a licensed electrician.
 2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.
- UL RATING: DRY, BULB WATTAGE 60W
BULB: 1x TYPE (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixtures is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings.
2. Shut OFF power to the circuit breaker where the wall sconce be installed.
3. Remove the back plate (A) from the base by unscrewing the two finials (B) and the two washers (C).
4. Affix the back plate (A) onto the outlet box.
5. Wrap both safety cables with nipples (D). Push the cables into the outlet box.
6. After fixing the back plate (A) onto the outlet box, fix the base of the wall sconce with finials (B) and the washers (C).
7. Install the candle sleeves (E) over the sockets.
8. Install the bulbs (not included) on the sockets.
9. Restore power to the circuit breaker and test wall sconce.
10. Installation is complete.

care instructions:


Clean with a dry, soft cloth only. Do not use any harsh abrasives or chemical agents

6610146H564 - ELEONORA CHANDELIERE-8 LIGHT - ANTIQUE SILVER

6610146H561 - ELEONORA CHANDELIERE-8 LIGHT - CHARCOAL

parts enclosed:

| Part | Description | Qty. | Part | Description | Qty. |
|------|------------------|------|------|-------------------|------|
| A | Lock collar | 1 | H | Cable | 1 |
| B | Mounting Bracket | 1 | I | Naked Earth Cable | 1 |
| C | Nipples | 3 | J | Ceiling Loop | 1 |
| D | Canopy | 1 | K | Candle sleeve | 8 |
| E | Chain | 1 | | | |
| F | Open Ring | 1 | | | |
| G | Loop | 1 | | | |

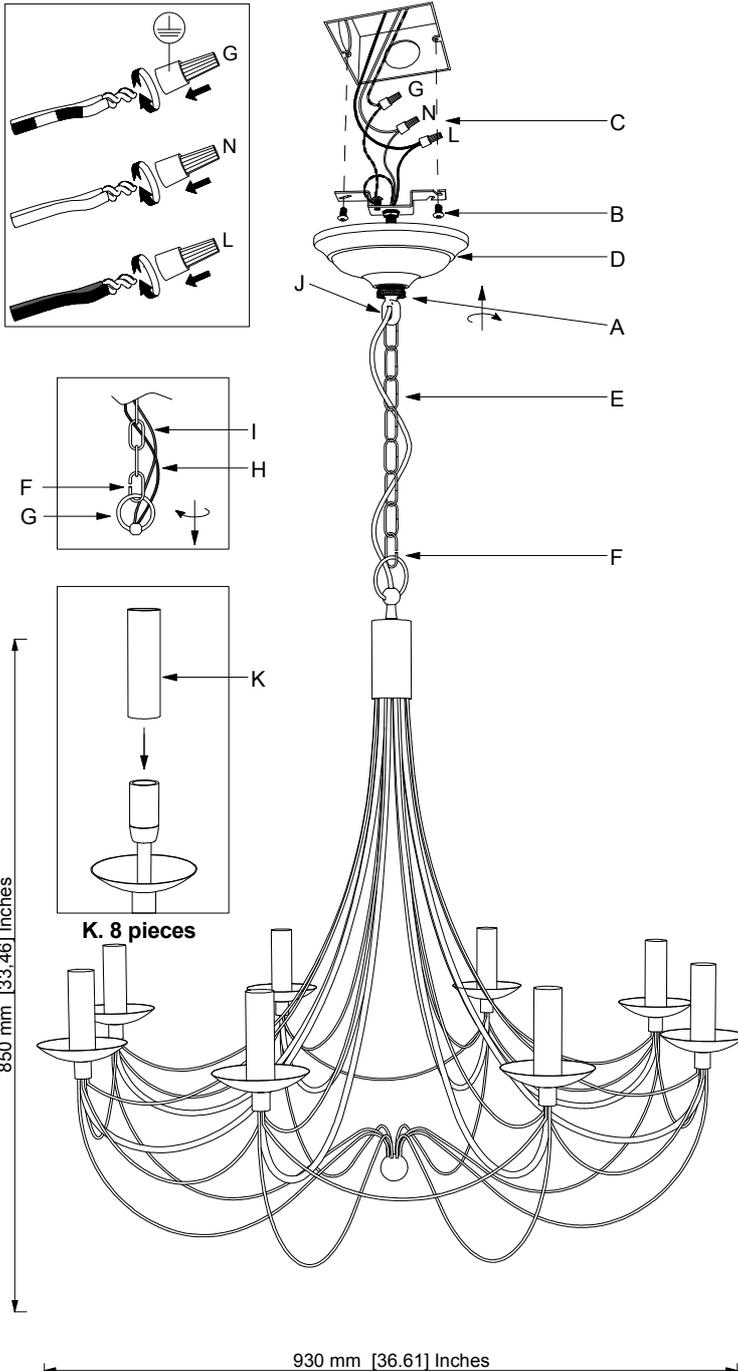

850 mm [33.46] Inches

930 mm [36.61] Inches

Carefully crafted by Italian artisans, this product is entirely made by hand. Individual pieces may vary in color, pattern, shape, and texture, making each truly unique.

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.
UL RATING: DRY, BULB WATTAGE 60W
BULB: 1x TYPE (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixtures is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box.
2. Remove the mounting bracket (B) from the canopy (D) by loosening the lock collar (A).
3. Shorten the chain (E) as needed using a pair of chain pliers.
4. Use the open ring (F) to link the chain (E) and the loop (G), put the cable (H) and naked earth cable (I) through the chain (E) in every 3-4 rings until through the ceiling loop (J).
5. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
6. Affix the bracket (B) onto the outlet box.
7. Wrap both safety cables with nipples (C). Push the cables into the outlet box.
8. Attach the canopy (D) to the mounting bracket (B) and secure with lock collar (A).
9. Install the candle sleeves (K) over the sockets.
10. Install the bulbs (not Included) on the sockets.
11. Installation is complete, turn on power at fuse or circuit breaker.



care instructions:

Clean with a dry, soft cloth only. Do not use any harsh abrasives or chemical agents

6610146H565 / 6610146H562 - ELEONORA WALL SCONCE-2 LIGHT

parts enclosed:

| Part | Description | Qty. |
|------|---------------|------|
| A | Back Plate | 1 |
| B | Finials | 2 |
| C | Washers | 2 |
| D | Nipples | 3 |
| E | Candle sleeve | 2 |
| | | |
| | | |

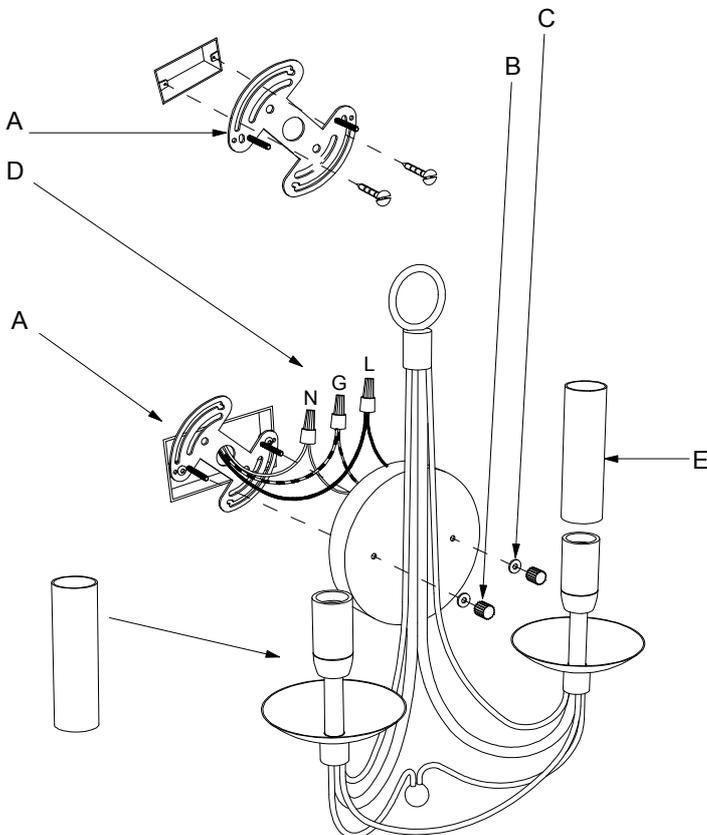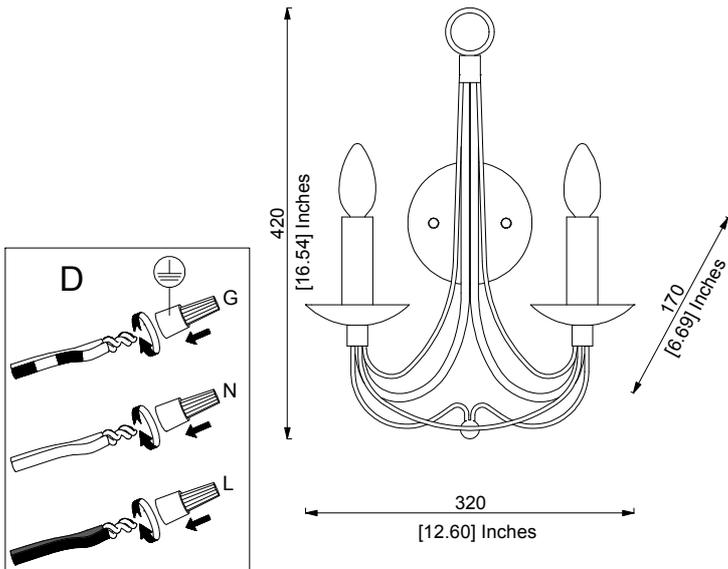

Carefully crafted by Italian artisans, this product is entirely made by hand. Individual pieces may vary in color, pattern, shape, and texture, making each truly unique.

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

UL RATING: DRY, BULB WATTAGE 60W
BULB: 1x TYPE (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixtures is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings.
2. Shut OFF power to the circuit breaker where the wall sconce be installed.
3. Remove the back plate (A) from the base by unscrewing the two finials (B) and the two washers (C).
4. Affix the back plate (A) onto the outlet box.
5. Wrap both safety cables with nipples (D). Push the cables into the outlet box.
6. After fixing the back plate (A) onto the outlet box, fix the base of the wall sconce with finials (B) and the washers (C).
7. Install the candle sleeves (E) over the sockets.
8. Install the bulbs (not included) on the sockets.
9. Restore power to the circuit breaker and test wall sconce.
10. Installation is complete.



care instructions:

Clean with a dry, soft cloth only. Do not use any harsh abrasives or chemical agents

6610146H566 / 6610146H563 - ELEONORA WALL SCONCE-3 LIGHT

parts enclosed:

| Part | Description | Qty. |
|------|---------------|------|
| A | Back Plate | 1 |
| B | Finials | 2 |
| C | Washers | 2 |
| D | Nipples | 3 |
| E | Candle sleeve | 3 |
| | | |
| | | |

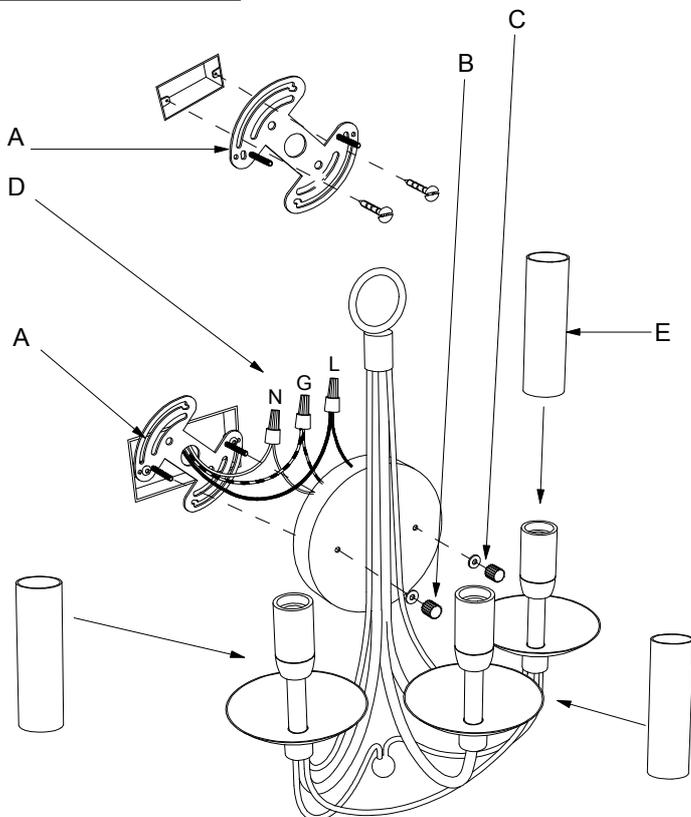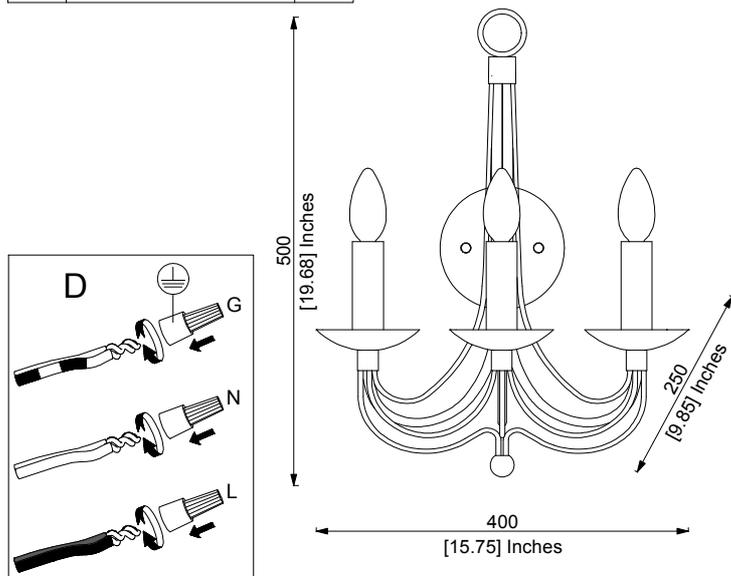

Carefully crafted by Italian artisans, this product is entirely made by hand. Individual pieces may vary in color, pattern, shape, and texture, making each truly unique.

important safety instructions:

1. We recommend installation by a licensed electrician.
 2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.
- UL RATING: DRY, BULB WATTAGE 60W
BULB: 1x TYPE (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixtures is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box and remove all protective coverings.
2. Shut OFF power to the circuit breaker where the wall sconce be installed.
3. Remove the back plate (A) from the base by unscrewing the two finials (B) and the two washers (C).
4. Affix the back plate (A) onto the outlet box.
5. Wrap both safety cables with nipples (D). Push the cables into the outlet box.
6. After fixing the back plate (A) onto the outlet box, fix the base of the wall sconce with finials (B) and the washers (C).
7. Install the candle sleeves (E) over the sockets.
8. Install the bulbs (not included) on the sockets.
9. Restore power to the circuit breaker and test wall sconce.
10. Installation is complete.

care instructions:


Clean with a dry, soft cloth only. Do not use any harsh abrasives or chemical agents

6610146H564 - ELEONORA CHANDELIERE-8 LIGHT - ANTIQUE SILVER

6610146H561 - ELEONORA CHANDELIERE-8 LIGHT - CHARCOAL

parts enclosed:

| Part | Description | Qty. | Part | Description | Qty. |
|------|------------------|------|------|-------------------|------|
| A | Lock collar | 1 | H | Cable | 1 |
| B | Mounting Bracket | 1 | I | Naked Earth Cable | 1 |
| C | Nipples | 3 | J | Ceiling Loop | 1 |
| D | Canopy | 1 | K | Candle sleeve | 8 |
| E | Chain | 1 | | | |
| F | Open Ring | 1 | | | |
| G | Loop | 1 | | | |

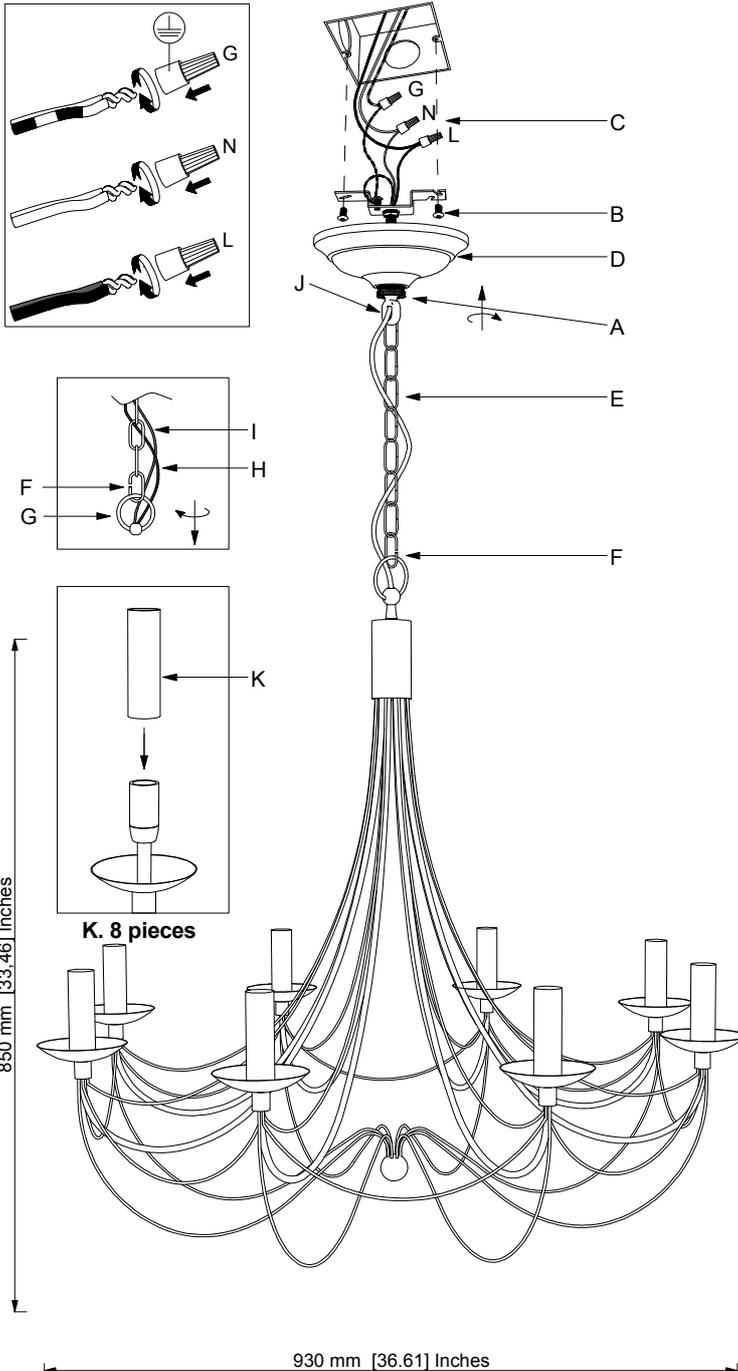

850 mm [33.46] Inches

930 mm [36.61] Inches

Carefully crafted by Italian artisans, this product is entirely made by hand. Individual pieces may vary in color, pattern, shape, and texture, making each truly unique.

important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.
UL RATING: DRY, BULB WATTAGE 60W
BULB: 1x TYPE (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord, as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixtures is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.

to assemble:

1. Carefully remove all parts from the box.
2. Remove the mounting bracket (B) from the canopy (D) by loosening the lock collar (A).
3. Shorten the chain (E) as needed using a pair of chain pliers.
4. Use the open ring (F) to link the chain (E) and the loop (G), put the cable (H) and naked earth cable (I) through the chain (E) in every 3-4 rings until through the ceiling loop (J).
5. INSURE THE ELECTRICITY SUPPLY IS TURNED OFF.
6. Affix the bracket (B) onto the outlet box.
7. Wrap both safety cables with nipples (C). Push the cables into the outlet box.
8. Attach the canopy (D) to the mounting bracket (B) and secure with lock collar (A).
9. Install the candle sleeves (K) over the sockets.
10. Install the bulbs (not Included) on the sockets.
11. Installation is complete, turn on power at fuse or circuit breaker.


care instructions:

Clean with a dry, soft cloth only. Do not use any harsh abrasives or chemical agents

660954H598 ELIANA SMALL PENDANT

parts enclosed:

- A - Screws (2)
- B - Universal Mounting Bracket (1)
- C - Plastic Wire Nuts (2)
- D - Threaded nipple (1)
- E - Canopy (1)

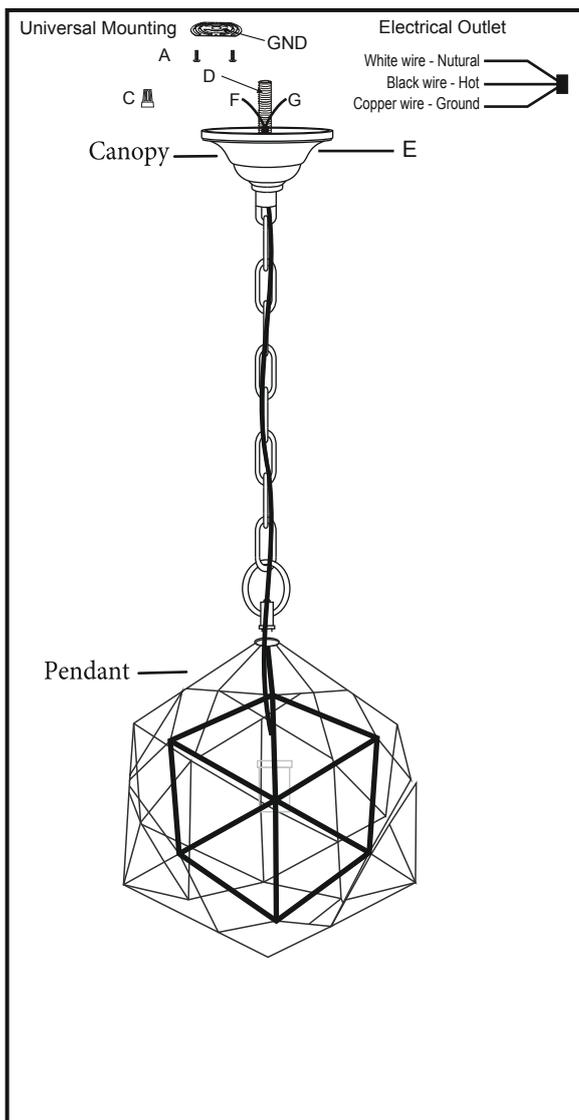**important safety instructions:**

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

UL NO:E178419 UL RATING:DRY, MAX BULB WATTAGE:1X40W
 CONVERSION TO MAX LED WATTAGE: 4 - 6 W
 BULB: 1 X B-11 (NOT INCLUDED)

warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord , as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.
5. Be sure to shut off power at the main fuse before installing the fixture.

to assemble:

1. Carefully remove all parts and hardware from the carton
2. Place the universal mounting bracket (B) over the outlet box using given screw (A) .
3. Gently pull the house wiring (white, black and copper ground wire) out of the electrical out let box.
4. Using the plastic wire nuts, (C) attached the ribbed wire (F) to the white "neutral" house wire and the non-ribbed wire (G) to the black "hot" house wire. Connect the braided copper ground wire to the green ground screw marked "GND" on the mounting strip.
5. Gently tuck the wire connectors nearly in to the wall outlet box.
6. Fit the canopy onto the universal mounting bracket (B) and secured with the supplied threaded nipple (D).



IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED

7. Insert bulb into the pendent socket and make sure they do not exceed the maximum wattage specified on the wattage label.
8. Restore power to the ceiling outlet.


care instructions:

DO NOT use polishes or Cleaners on your lamp. Wipe with soft, lint free cloth.

66954H104 ELIANA LANTERN PENDANT

Parts enclosed:

- A - Screws (2) 
- B - Universal Mounting Bracket (1) 
- C - Plastic Wire Nuts (2) 
- D - Threaded nipple (1) 
- E - Canopy (1)

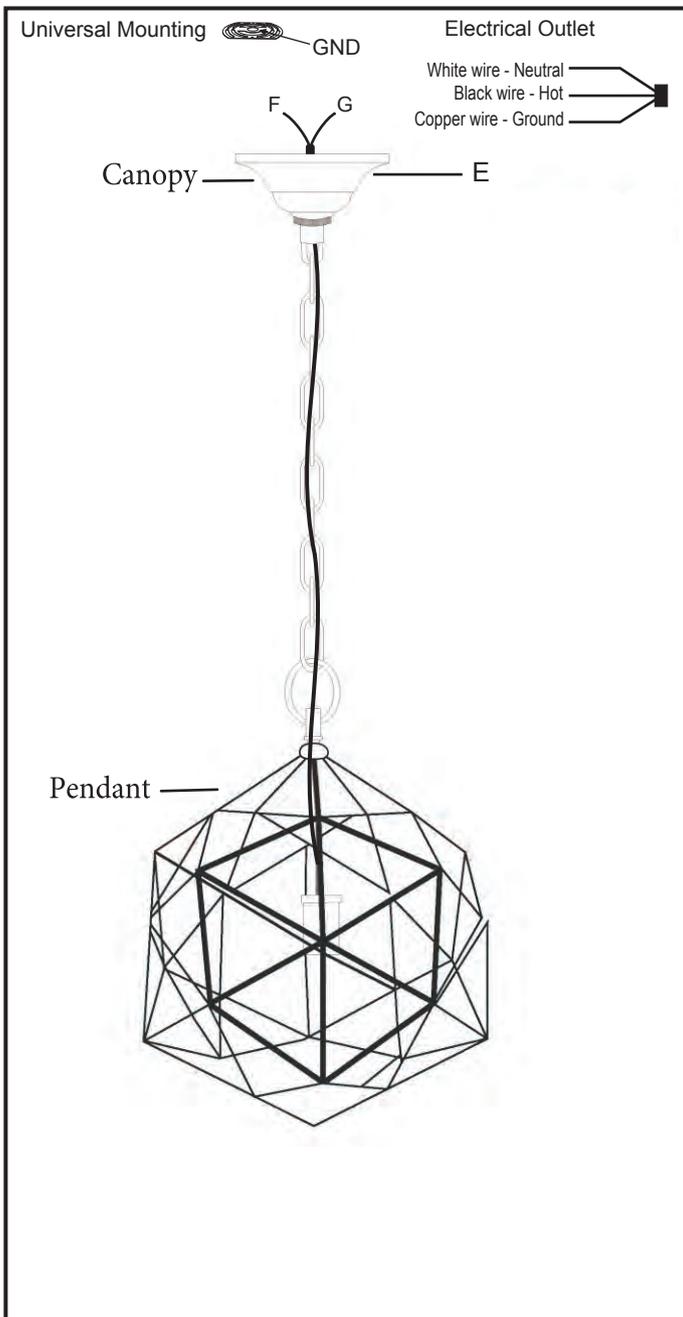

Important safety instructions:

1. We recommend installation by a licensed electrician.
2. To avoid the risk of fire, do not exceed the recommended wattage for this fixture.

Max watt - 1x40 , E 26 Type A -1 Bulb
UL File #: E178419

Warnings:

1. Do not remove the lamp from its packaging by pulling on the power cord , as a bad connection may result.
2. To avoid the risk of fire, electrical shock, or personal injury, turn off lamp and allow it to cool prior to replacing light bulb.
3. Do not touch bulb when fixture is turned on or look directly at lit bulb.
4. Keep flammable materials away from lit bulb.
5. Be sure to shut off power at the main fuse before installing the fixture.

To Assemble:

1. Carefully remove all parts and hardware from the carton
2. Place the universal mounting bracket (B) over the outlet box using given screw (A) .
3. Gently pull the house wiring (white, black and copper ground wire) out of the electrical outlet box.
4. Using the plastic wire nuts, (C) attached the ribbed wire (F) to the white "Neutral" house wire and the non-ribbed wire (G) to the black "hot" house wire. Connect the braided copper ground wire to the green ground screw marked "GND" on the mounting strip. It is imperative that the outlet box in your home be properly grounded.
5. Gently tuck the wire connectors nearly in to the wall outlet box.
6. Fit the canopy onto the universal mounting bracket (B) and secured with the supplied threaded nipple (D).
7. Insert bulb into the pendant socket and make sure they do not exceed the maximum wattage specified on the wattage label.
8. Restore power to the ceiling outlet.

Care instructions:

Wipe with a soft dry cloth. To protect finish, avoid the use of chemicals and household cleaners.