



DUALLY

INSTRUCTIONS



IN THE BOX:


- A = M6 NYLON LOCKNUTS (2)
- B = MOUNTING BRACKET
- C = M6 ALLEN BOLT (2)
- D = DUALLY
- CARRIAGE WASHER
- 5/16" CARRIAGE NUT
- WIRING HARNESS

THANK YOU AND CONGRATULATIONS ON PURCHASING A DUALLY LED LIGHT! WITH RIGID'S PATENTED "HYBRID OPTICS", THE DUALLY RISES ABOVE THE COMPETITION IN EFFICIENCY & PROJECTION. YOUR NEW LIGHT IS A TRUE EXAMPLE OF THE HIGHEST IN LED LIGHTING TECHNOLOGY. THANK YOU FOR SUPPORTING **RIGID INDUSTRIES** AND ENJOY YOUR NEW LED LIGHT!

RIGIDINDUSTRIES.COM

FUSE CHART

LIGHT	DUALLY	DUALLY (PAIR)
AMPS	5	5

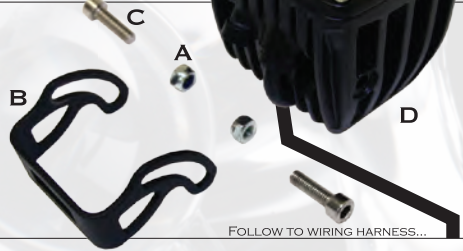

FOLLOW TO WIRING HARNESS...



INSERT MOUNTING BRACKET INTO SLOTS AS SHOWN IN PICTURE. INSERT M6 NYLON LOCK NUTS INTO CAVITIES IN HOUSING. INSERT M6 ALLEN BOLTS INTO HOLES IN HOUSING, CAPTURING NYLON LOCKNUTS. SNUG SLIGHTLY AND MOUNT LIGHT USING CARRIAGE BOLT, WASHER AND NUT SYSTEM THAT WAS PROVIDED. WAIT TO SECURE ALL NUTS UNTIL YOU HAVE YOUR LIGHT WORKING AND IN DESIRED POSITION.



ATTACH RED TERMINAL TO BATTERY +, OR ANY 12VDC SOURCE. SECURE BLACK TERMINAL TO A SUITABLE GROUND OR BATTERY NEGATIVE. ROUTE HARNESS TO DESIRED SWITCH AND MOUNTING LOCATIONS, SECURE WITH ZIP TIES. BEWARE OF SHARP EDGES, ABRASIVE SURFACES AND HEAT SOURCES WHEN ROUTING WIRES. *WHEN ATTACHING SWITCH, IF INDICATOR LIGHT STAYS ON, SWAP RED WIRES ON SWITCH TERMINAL TO ENSURE FUNCTION.



WHEN INSTALLING RIGID INDUSTRIES LIGHTS ON A 24V SYSTEM, BE SURE TO USE A 24V RELAY. WHEN INSTALLING MULTIPLE LIGHTS, BE SURE YOU HAVE ADEQUATE FUSING. YOU WILL NEED 5 MORE AMPS OF FUSING FOR EVERY DUALLY OR DUALLY D2. FINALLY, TEST LIGHT(S) TO ENSURE PROPER OPERATION. CONTACT TECHNICAL SUPPORT FOR INSTALLATION QUESTIONS (480) 655-0100

- MOUNT SWITCH INSIDE CAB.
- SECURE EYELETS TO BATTERY.
- WIRE SWITCH AS FOLLOWS:
 - BLACK (TO GOLD PRONG)
 - RED (MIDDLE PRONG)*
 - RED (REMAINING PRONG)*

RIGID INDUSTRIES WIRING HARNESS

