


ASSEMBLY INSTRUCTIONS


knox doublewide dresser/changer

a how-to guide that won't leave you in tears

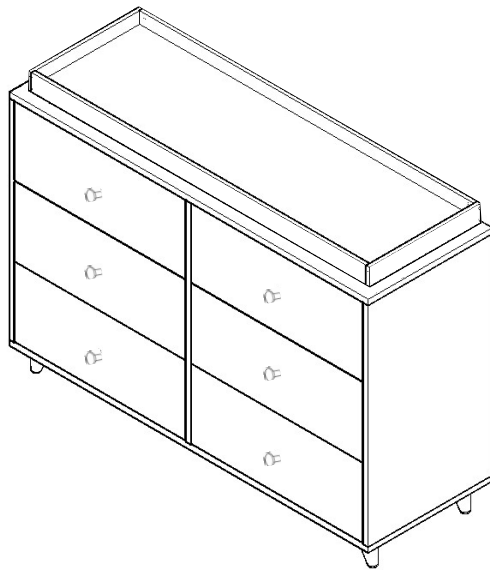

parenting is hard.
this is easy.


no really, it is.



MADE HERE™



MADE WELL™




MADE SAFE



MADE SMART

want to watch this assembly IRL?

(acronym challenged? that means “in real life”.)

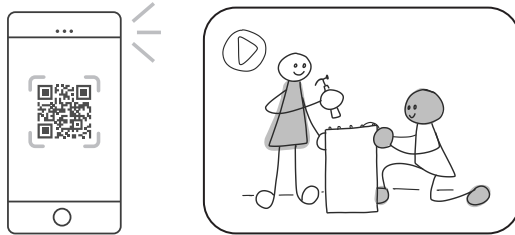

open the camera on your phone and place it over the QR code below to see our NYC studio dream team do all the heavy lifting (just kidding, there is none!)



or go to ducdcnyc.com/pages/assembly-instructions

**thank you for selecting a
studio duc product!**

Please check contents against the components list in these instructions. Also, please ensure there was no damage that may have occurred in shipping. If any components are missing or you find any damage, please contact ducduc before continuing.

To use the dresser as a changing table, insert and use the changing table tray provided with the dresser.

We recommend the use of a Colgate 3-Sided contour Pad (CR300-S80) if this dresser is to be used as a changing table.

Maximum changing pad dimensions: W16" x L33" x H5".

Pay close attention to the safety warnings in these instructions and on dresser/changer labels.

The maximum weight of any child on top of the dresser/changer is 45 pounds.

WARNING

FALL HAZARD: Children have suffered serious injuries after falling from changing tables. Falls can happen quickly.

- **STAY** in arm's reach of your child.
- **ALWAYS** secure this unit to support surface using the mounting hardware provided. see instructions.

Read all the instructions before use.

Do not use if dresser/changer is damaged or broken.


CARE AND CLEANING:

Do not scratch or chip the finish. Do not use abrasive chemicals for cleaning. Clean with mild soap on a soft rag. Rinse and dry thoroughly. If you ever re-finish this furniture, be sure to use only a non-toxic finish.


Do not attempt to move this dresser/changer alone—dragging or sliding it across a floor may cause structural damage. A minimum of two people is required to safely lift and reposition the dresser/changer.

KEEP INSTRUCTIONS FOR FUTURE USE


WHAT'S IN THE BOX:




A1
R side panel




A2
L side panel




B
center partition

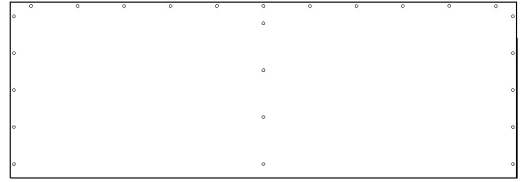

E
top

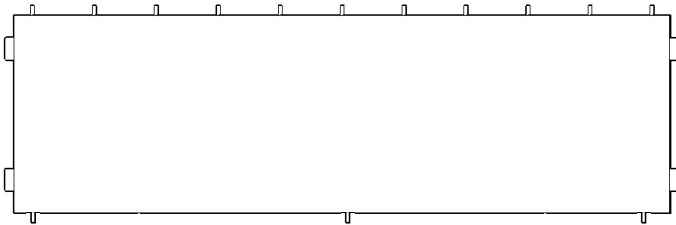


C1
upper back panel

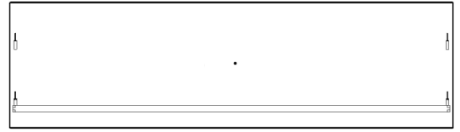

DB1 (x6)
drawer face




DB2 (x6)
drawer box back

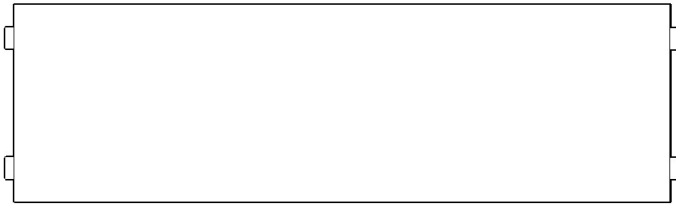


C2
lower back panel



DB3 (x6)
L drawer box side




DB4 (x6)
R drawer box side

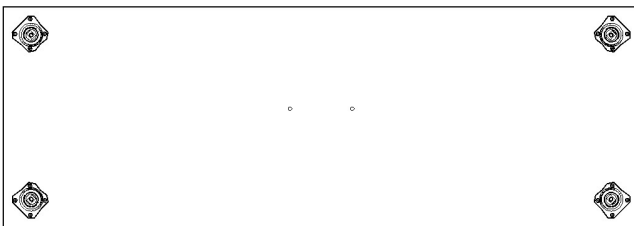

D
bottom panel




DB5 (x6)
drawer box bottom




DB6 (x6)
knox pull hardware



DB7 (x6)
screw for knox pull




F (x4)
foot



G (x4)
washer




H (x4)
5/16" locking
washer



I
block foot




J
hammer cap




SAFETY
STRAP

K
safety strap
kit


INCLUDED WITH CHANGER ONLY:



CT-1
changing tray




CT-2 (x2)
tray bracket



CT-3 (x8)
JCB bolt (20mm)




CT-4 (x8)
5/16" locking
washer



CT-5
allen key (4mm)

WHAT YOU'LL NEED:




**household hammer or
rubber mallet**



**phillips head screwdriver
and/or drill with 6mm bit**



20 minutes
(or less)




a soft surface to assemble on
*(like a rug or some of the corrugate
box your piece arrived in)*





2 people
plus a dog for moral support
(unless you're a cat person)



1 lean bottom (D) against a wall as shown.

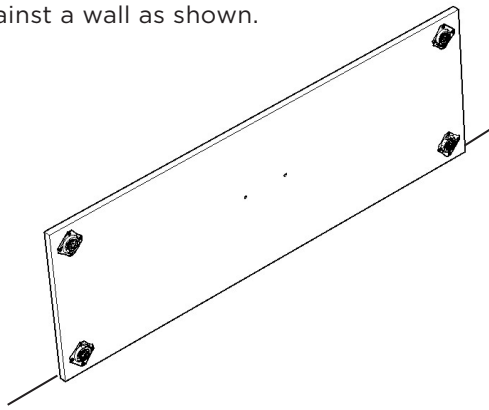

2 beginning in one corner, take a washer (G), locking washer (H) and foot (F) as seen below, and insert the bolt located on foot (F) into the brackets on bottom panel (D). Twist until the foot is fully secure, and repeat for all feet (F) provided.

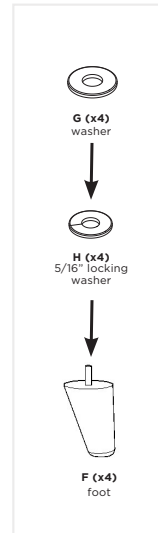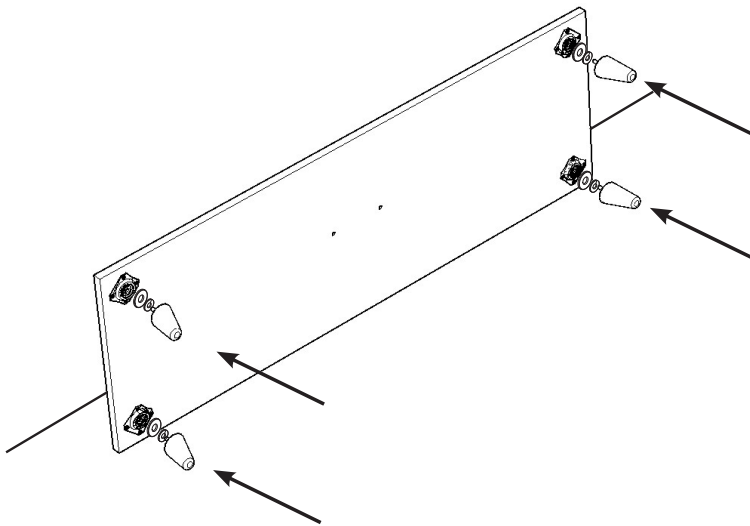


3a insert connectors on block foot (I) into holes on bottom (D). tap with hammer and hammer cap (J) to lock into place. when you are done, place bottom panel (D) and attached components aside for later.

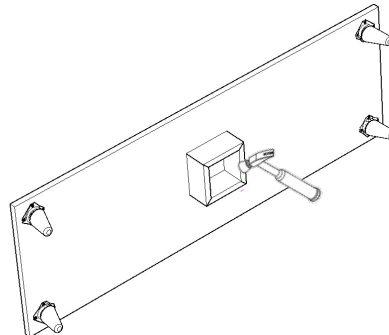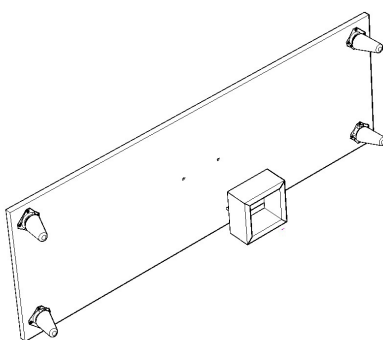


3b

unscrew the adjustable glides counter-clockwise to the height of the dresser feet to ensure that the block foot stabilizes the dresser and sits level on the floor

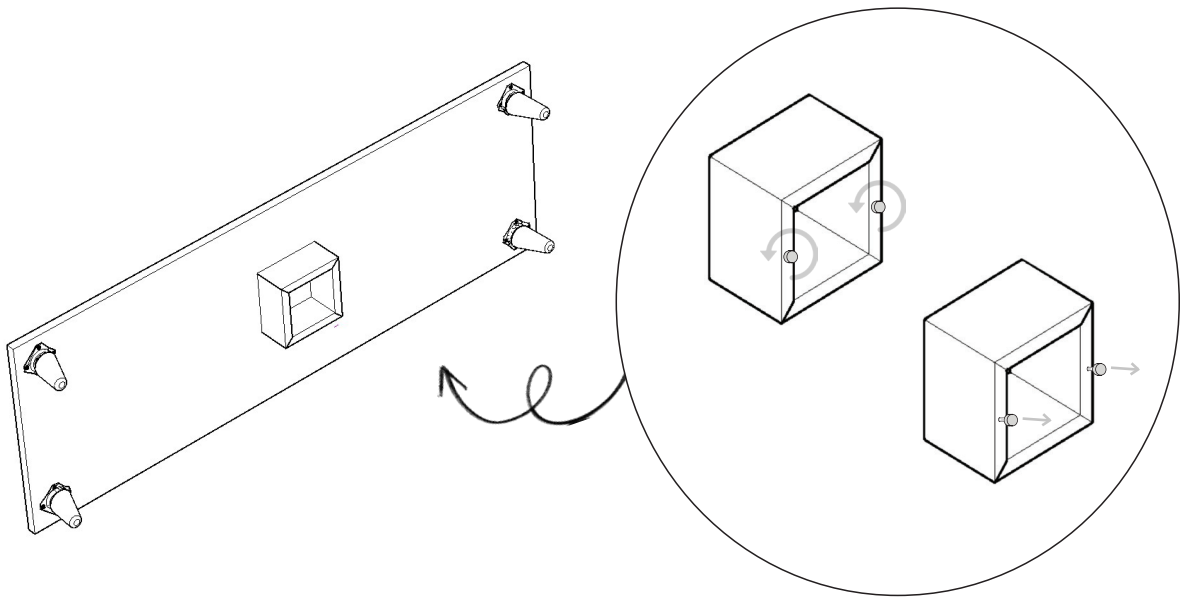

4

insert connectors of upper back panel (C1) into the holes on lower back panel (C2). push down or use hammer with hammer cap if needed until the gap between the two panels is fully closed.

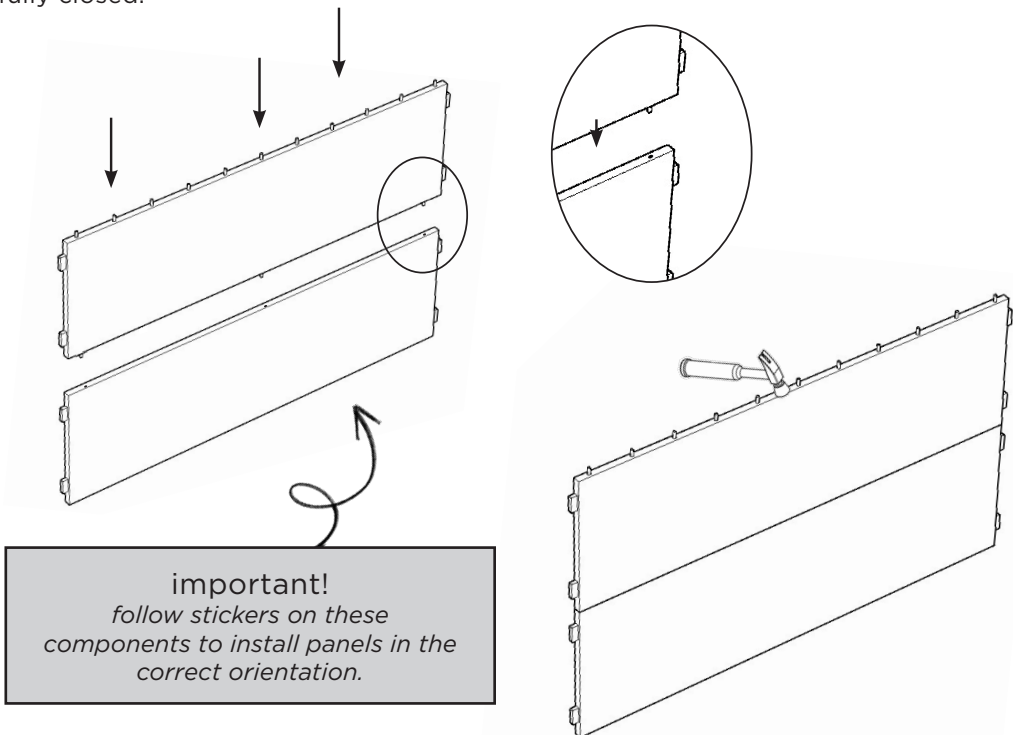


still confused? scan this code to watch the assembly video! →




5

lean R side panel (A1) against a wall as shown.

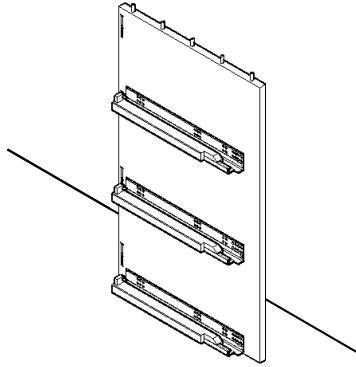

6


insert connectors of assembled back panels (C1 + C2) into slots on R side panel (A1). push down at the connection to lock into place. if needed, use hammer with hammer cap to tap until secure.

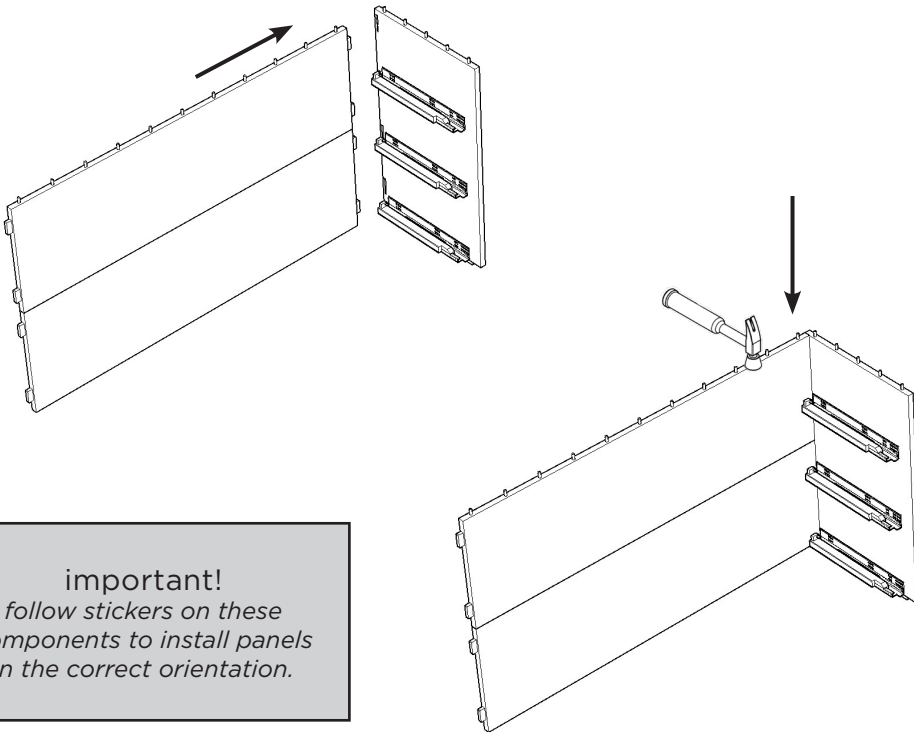

important!
*follow stickers on these
components to install panels
in the correct orientation.*


7

insert remaining connectors of assembled back panels (C1 + C2) into slots on L side panel (A2). again, push down at the connection point and use hammer with hammer cap if needed.

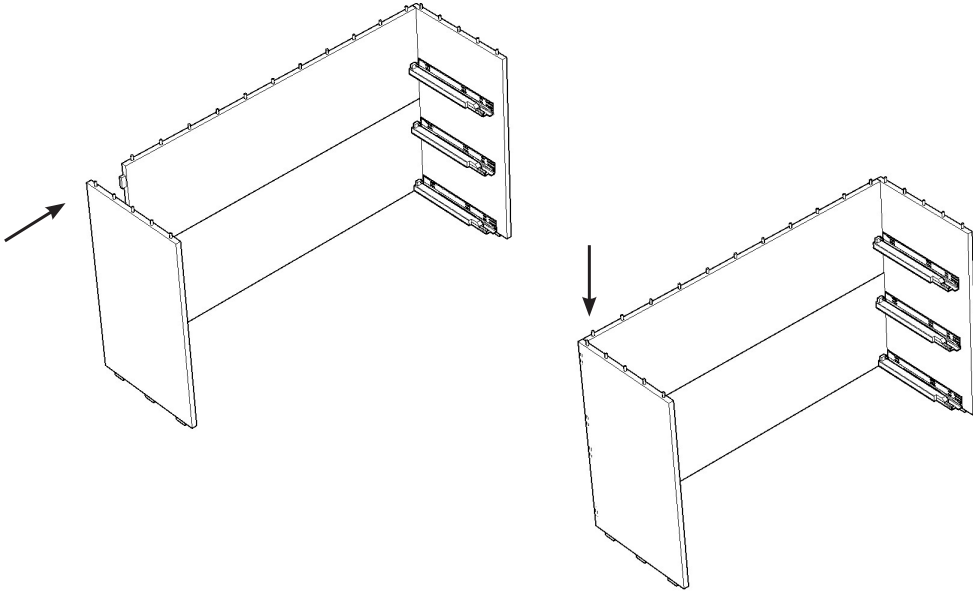


8

gently lay the partially assembled case on its back.

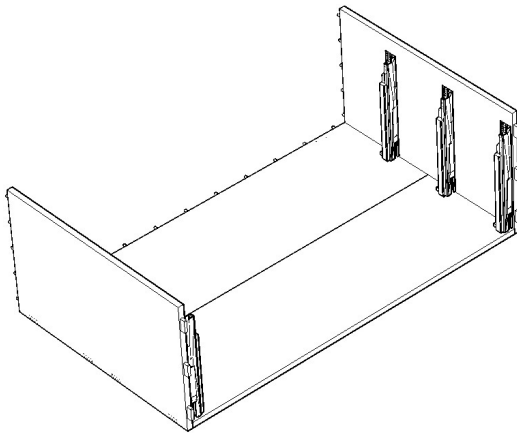


wait!

locate bottom panel (D) with attached components before moving on to the next step.

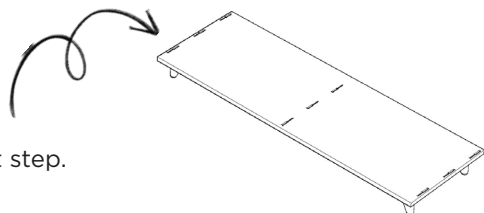


9

insert connectors on both side panels (A1 + A2) into slots on bottom panel (D). push down or tap with hammer and hammer cap (J) to lock into place.

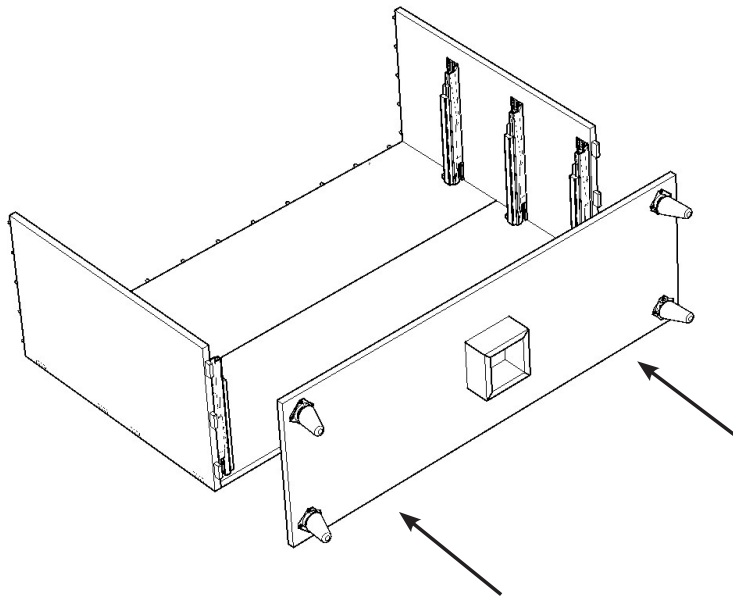


important!
*follow stickers on
bottom panel (D) to
install panel in the
correct orientation.*

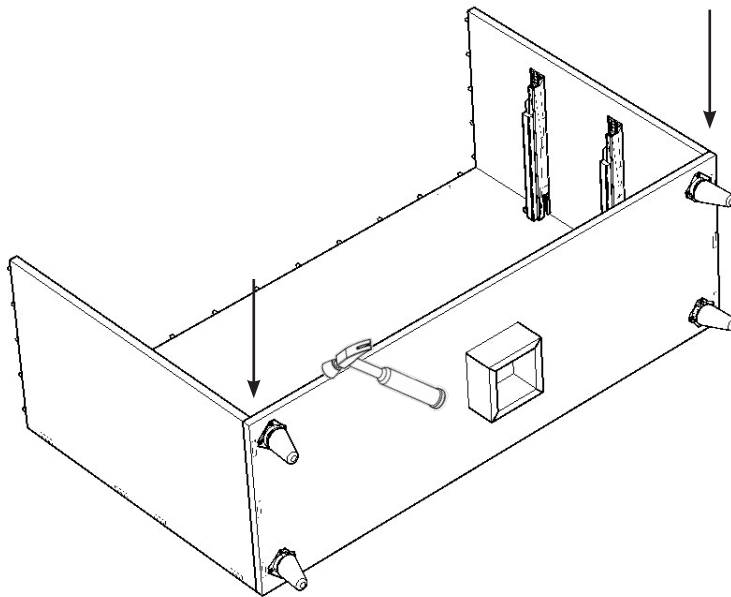



still confused? scan this code to watch the assembly video! →



10 insert connectors on center partition (B) into slots on bottom (D) and push down to lock into place.


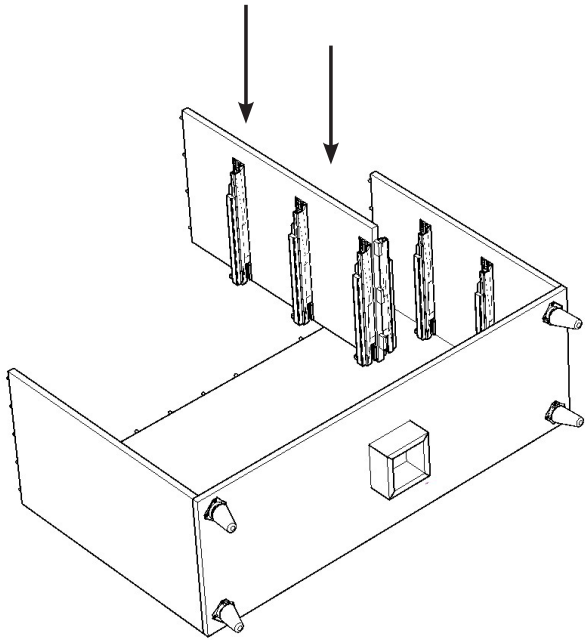



important!
when attaching these components, make sure the drawer glide hardware on center partition (B) extends upward as shown.

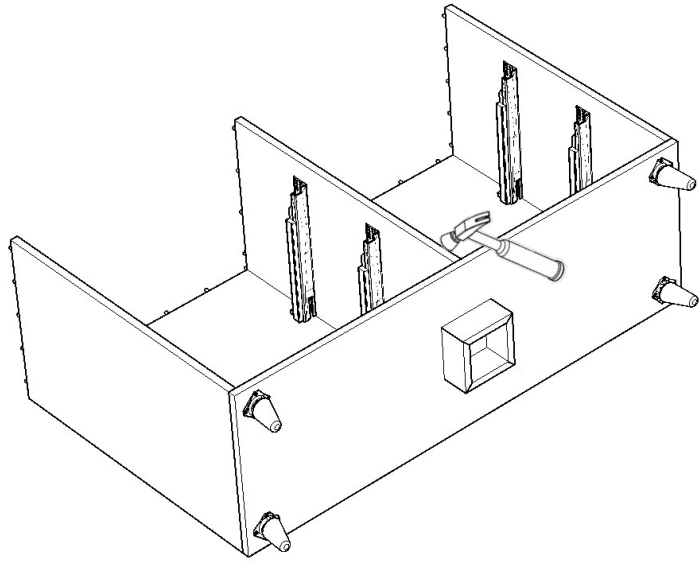

11

with a friend, flip partially assembled case into upright position. line up holes of top (E) with the connectors of side panels (A1 + A2), center partition (B) and upper back panel (C1). tap with hammer and hammer cap (J) to lock into place.

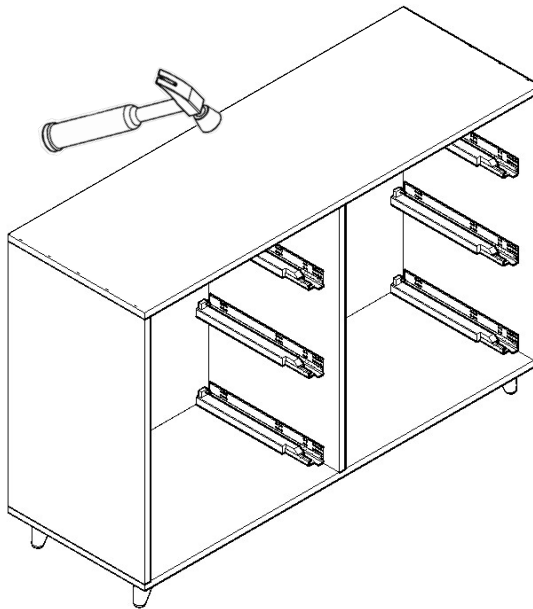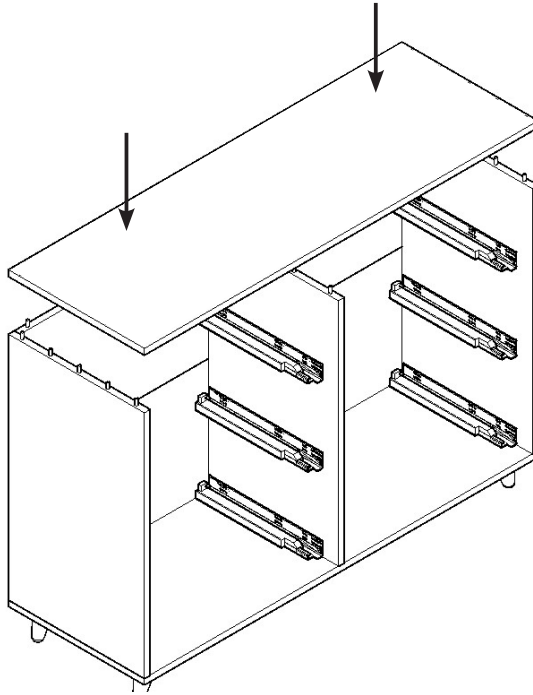


still confused? scan this code to watch the assembly video! 




12a


now we build the drawers! starting with drawer face (DB1) facing down, insert connectors of both drawer box side panels (DB3 + DB4) into slots on drawer face (DB1). push down at the connections to lock into place.

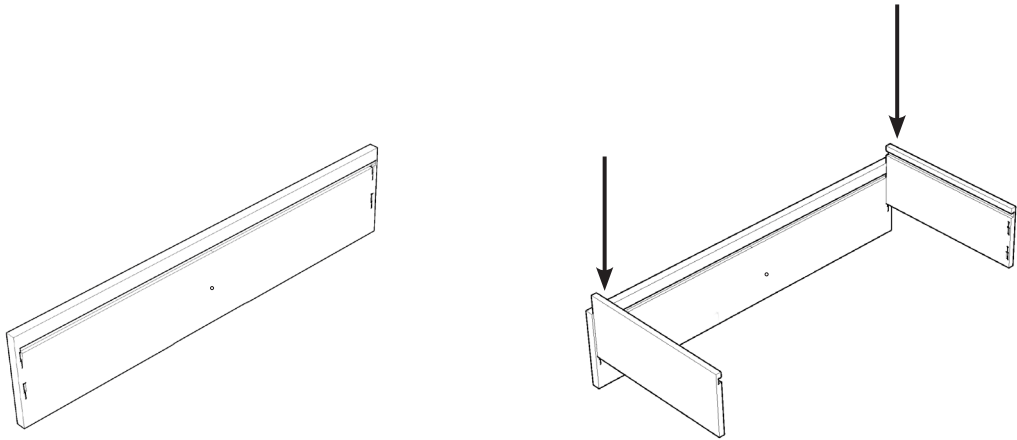

12b

rotate the partially assembled drawer box as shown. slide drawer box bottom (DB5) into place using grooves on the drawer box side panels (DB3 + DB4) as guides. be sure glide hardware on bottom panel (DB5) is positioned outside the drawer interior and toward the drawer face (DB1) as shown.

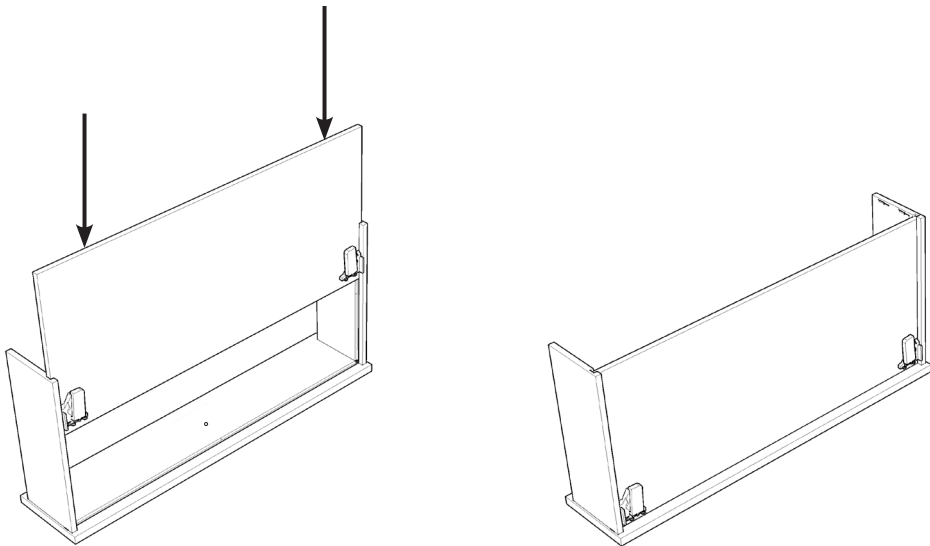

still confused? scan this code to watch the assembly video! 





12c

again, rotate partially assembled drawer box as shown. insert connectors of drawer box back (DB2) into slots on drawer box sides (DB3 + DB4). push down at the connections to lock into place. use hammer and hammer cap (F) if needed.


duc insider tip!

when the drawer bottom panel is properly installed, it should be recessed about a 1/4" from the back of the drawer sides. (don't be afraid to use some force!)

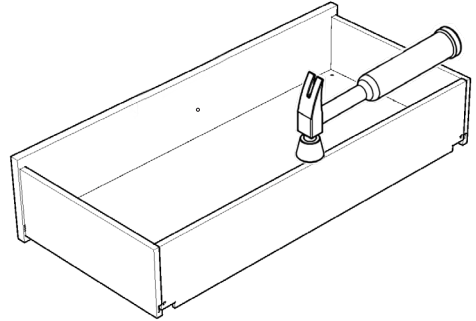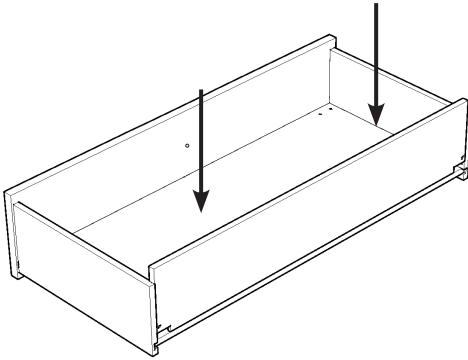


12d


using a phillips screwdriver and screws (DB7), attach the pull hardware (DB6) to the front of each drawer face.

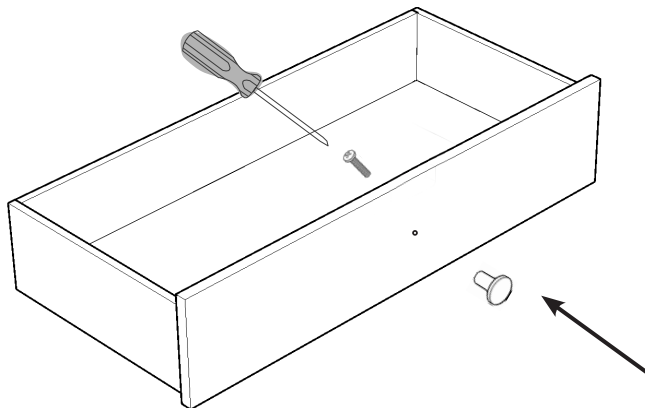


13 build remaining drawers using steps 12a, 12b, 12c, and 12d.

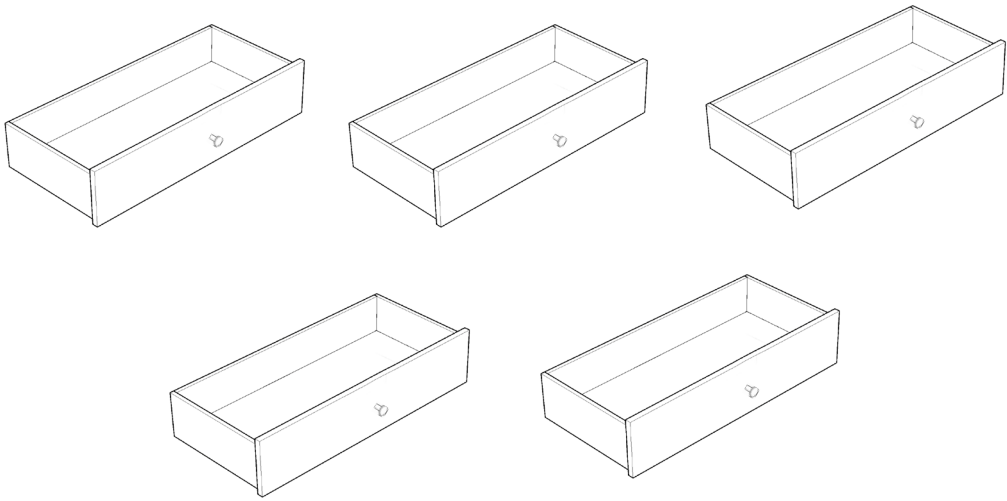

14a starting at the top, pull drawer glides out to extended position as shown.



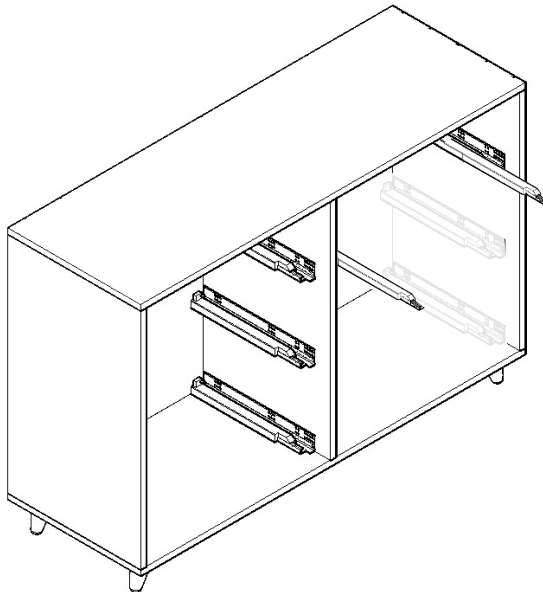


still confused? scan this code to watch the assembly video! 




14b

place one assembled drawer box onto extended glides as shown. from underside of drawer, use hands to pull each glide forward until it locks into connection with glide hardware attached to drawer box bottom (DB5). the drawer will be secure when you hear a click on each connection. once secured, push drawer box in to close.

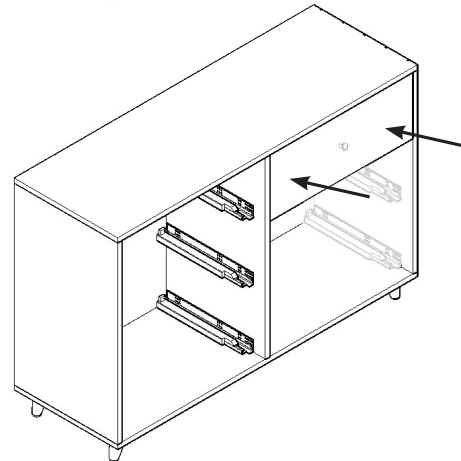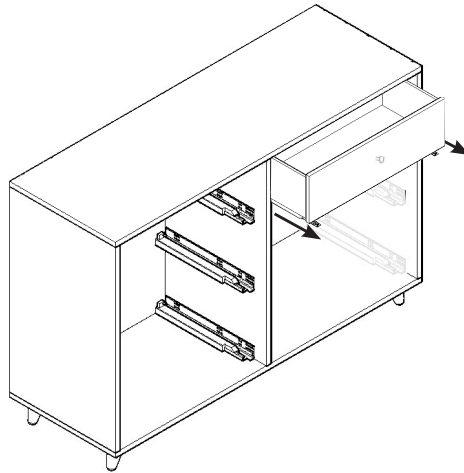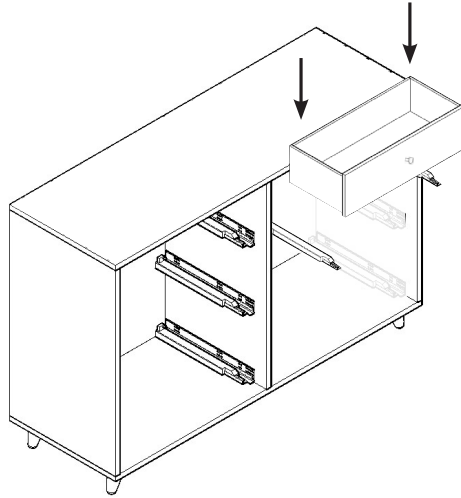

15

repeat steps 14a + 14b to install the remaining drawers.


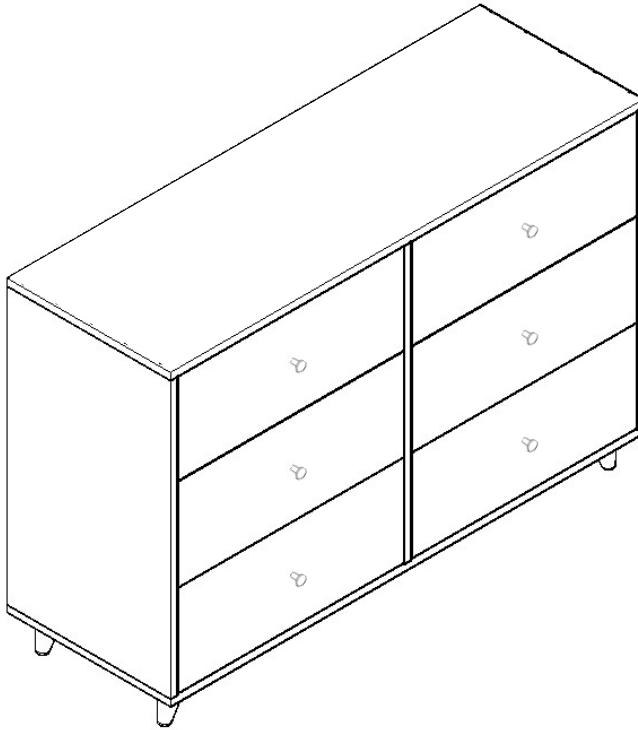


before you move on!

proceed to the next step if you purchased a **changer**.
for a **dresser**, skip to step 17.

16

place changing tray (CT-1) on top of assembled case so the pre-drilled holes at the backs of both pieces align. starting at one side, place hardware (CT-2) over the holes on the case and changing tray (CT-1). secure into place using the allen key (CT-5) to screw in hardware (CT-3 + CT-4) as arranged in the picture.

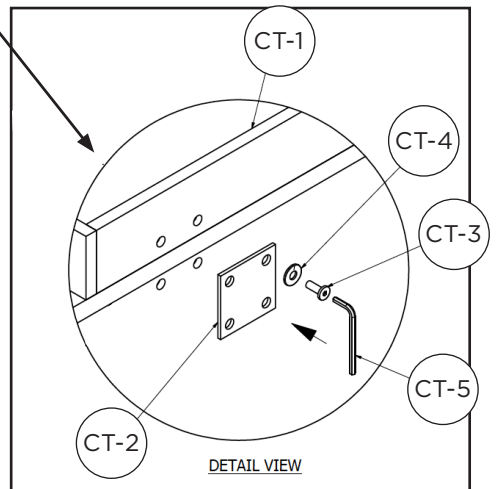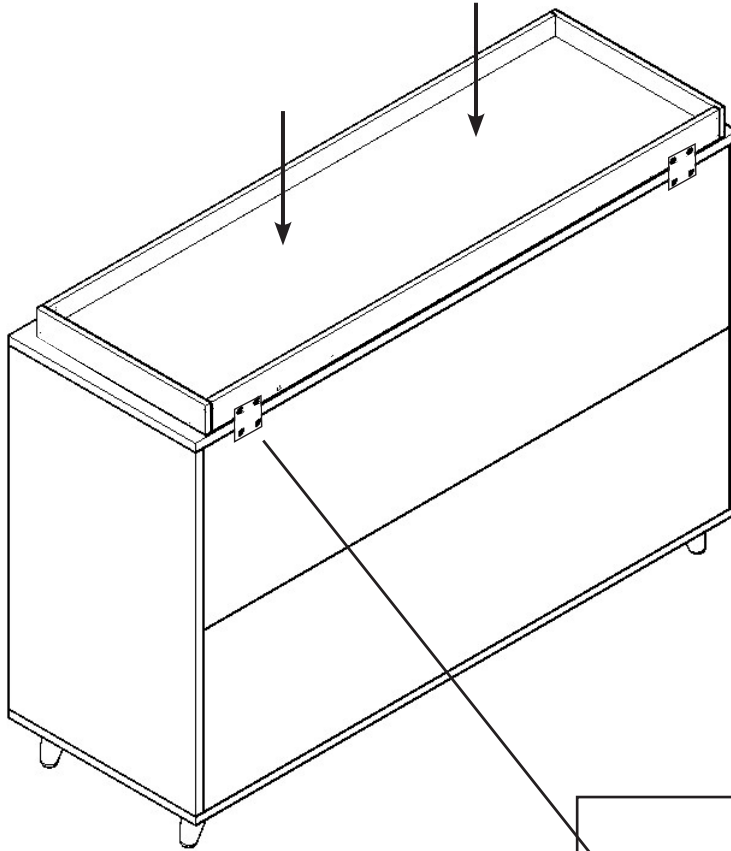

duc insider tip!

when attaching the changing tray to the dresser, start by loosely screwing in each bolt over the bracket. once everything is lined up and each of the 4 bolts are in place, fully tighten all screws until secure.

repeat on the remaining bracket using the same method.


still confused? scan this code to watch the assembly video! →



17


safety strap installation

the last step for your doublewide dresser/changer is to install the safety strap included in the box. reference the separate instructions enclosed in the envelope.

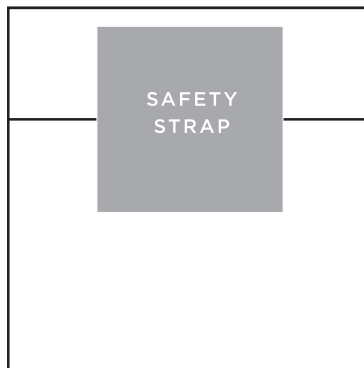

finito! you did it!

give yourself a pat on the back, take a bow,
or go house a pint of ice cream...we don't judge.

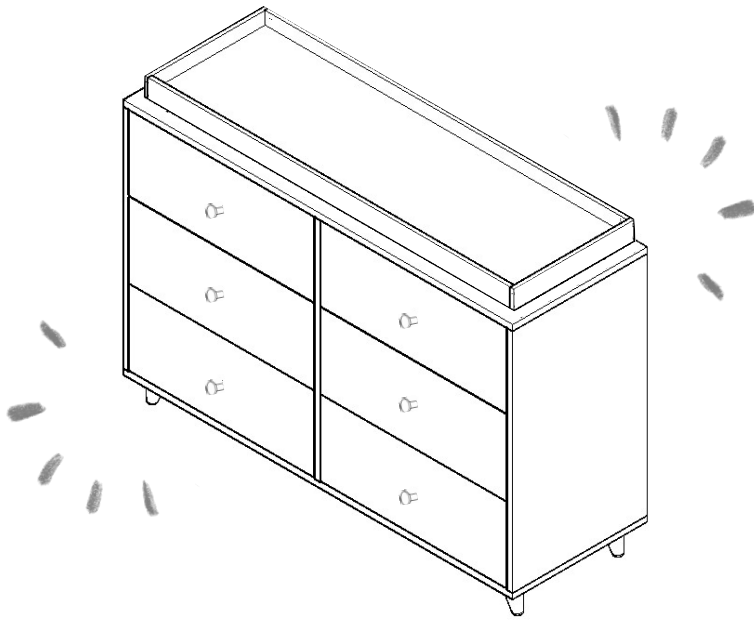

prefer to talk to a human instead? we're here for you!

contact our customer advocate team below:



212.226.1868



quack@ducducnyc.com



live chat at
ducducnyc.com