

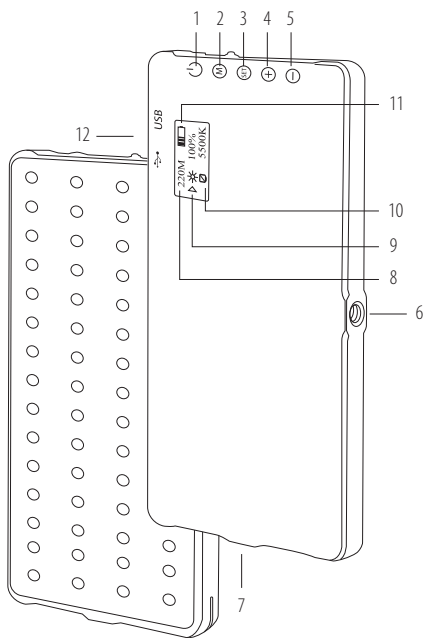
10W RGBW LIGHT WITH POWERBANK

INVRGB10



INCLUDED

- RGB LED Light Power Bank
- USB-C Charging Cable
- Hot/ Cold Shoe Mount
- Instruction Manual




- ① Power
- ② Mode
- ③ Set
- ④ Plus
- ⑤ Minus
- ⑥ 1/4" screw mount
- ⑦ 1/4" screw mount
- ⑧ Remaining time
- ⑨ Brightness
- ⑩ Colour temperature
- ⑪ Battery life
- ⑫ USB port

Specifications

Power range	1% - 100%, adjustable
Colour temperature	2300K-8500K(+/- 300), adjustable
Max brightness	630LM
Rated output power	10W
Number of LED	28 RGB led's + 32 dual white colour led's
Colour rendering	>95(RA), white light mode
Charging port	USB-C, 5V/2A
Output port	USB-A, 5V/2A
Charging time	Approx. 9 hours
Built in lithium battery	5,000mAh
Battery life	100% power@ 5600K for 2 hours
Temperature operation	-10C - +35C, storage temp -10C - +50C
Mounting port	Universal 1/4 inch mount *2
Dimensions	140 x 76 x 14mm
Weight	213.5g

How to use

Power on/off

Press and hold the  button for 3 seconds to turn the power on or off.

Mode (M) button controls

Once the LED light is on, press the mode button to toggle between the 8 different modes. The mode number located on the rear LED display will indicate which mode you are in.

Set button controls

Press Set button to toggle different options of every mode.





























Plus and minus controls

Push the (+)/ (-) buttons: to adjust the selection up/down; press to add or decrease the value, press and hold to add or decrease the value continuously.

Number	Modes
Mode 1	Orange
Mode 2	Color Temperature
Mode 3	RGB Colours
Mode 4	RGB Adjust Colours

Number	Modes
Mode 5	Lava Lamp
Mode 6	Lightning Flash
Mode 7	Warning Light
Mode 8	Scenes

All modes chart

Mode Menu			
Mode	Icon	Type	Parameter
Mode 1 Orange Light		Power	1%-100%
		Shade	7000K
		Cloudy	6000K
		Flash	5500K
		Noon light	5200K
		Fluro Light	4000K
		Fluro Lamp	3200K
Mode 2 Temperature		Power	1%-100%
		Colour Temp	2500K-8500K
Mode 3 RGB Colour		Power	1%-100%
		Tone	0-360
		Saturation	0L-100L
Mode 4 RGB Adjust	R	Red	0-100%
	G	Green	0-100%
	B	Blue	0-100%
Mode 5 Lava Lamp		Power	1%-100%
		Light change speed	A: slow B:Medium C:Fast
		Power	1%-100%
Mode 6 Lightning Flash		Power	1%-100%
		Flash Speed	A: Fast B: Medium C: Slow
		Power	1%-100%
Mode 7 Warning Light		Power	1%-100%
		Ambulance	A: Fast
		Ambulance	B: Medium
Ambulance		C: Slow	
Mode 8 Scenes		Power	1%-100%
		Bar	1
		Birthday	2
		Fairy tale	3
		Grassland	4
		Waves	5
		Aurora	6
		Film and TV	7

Tips for Best Performance

- Charge before use
- Unplug the power cord after charging
- It is recommended to charge at least every three months to prolong battery life.

Warning

- Please keep the unit dry. Do not touch this product with wet hands. Do not immerse the product in water or expose to rain.
- Do not disassemble, crush, impact or put into fire.
- Do not use in the presence of flammable gases, otherwise may cause an explosion or fire.
- Do not use, store or charge in high temperature environment or closed space under direct sunlight.
- Please use the specified charger to charge the battery and use it within the specified voltage.
- This product involves a battery, please strictly follow the corresponding operating specifications for the use of the battery, otherwise it may cause an explosion or fire.

Influencer™

PO Box 5658 Brendale QLD
Australia 4500
Customer Support 1800 812 261

