

Multiple Patents and Trademarks registered and pending



*Create a magical holiday display in your yard*

*Only available from* **Service First**





# SERVICE FIRST

## Veteran owned & Operated



*Service First is owned and operated by Parker McCumber, an OEF Veteran, who served with the 2nd Cavalry Regiment and 1st Cavalry Division as a Forward Observer and Fire Support Section Chief.*

*Parker has also served several years in the Utah National Guard as a Targeting NCO, and is continuing his service and transitioning to officership with the Utah National Guard. We know the sacrifice service members make, and recognize their contributions to our great nation as we pay respect to our flag and all it represents.*



*"I believe every American should be able to fly our nation's flag proudly, and the mission of ServiceFirstProducts.com is to make it easy and affordable for everyone to have a beautiful flagpole in their yard and at their home."*

*-Parker McCumber*




# PARTS

## Dream Flagpole Christmas Light Conversion Kit

Suitable for flagpoles 30' or less

Only available from Service First™

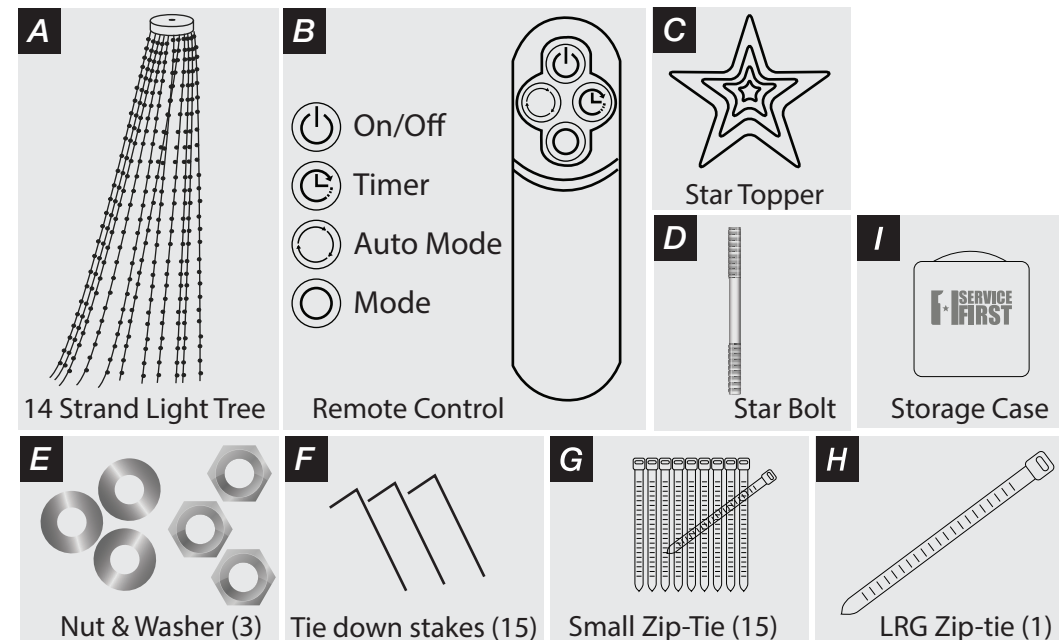



# INSTRUCTIONS



## Installing your Dream light

A complete installation video is available at [www.ServiceFirstProducts.com](http://www.ServiceFirstProducts.com).

! These instructions will work for both Telescoping or Sectional Flagpoles. There may be slight differences between actual installation and the graphics/instructions below. !



1 Lower or remove your flagpole from the ground sleeve so you can access the top of the flagpole. Remove the current finial (gold ball/eagle) and all flags from your flagpole.

2 Using the Star Bolt (D), thread a nut (E) on the upper and lower threads of the Bolt, add a washer and slide through the Light Distributor (A), and screw securely to the top of your flagpole. (see diagram below) \*\*\*IMPORTANT\*\* Hand tighten ONLY!

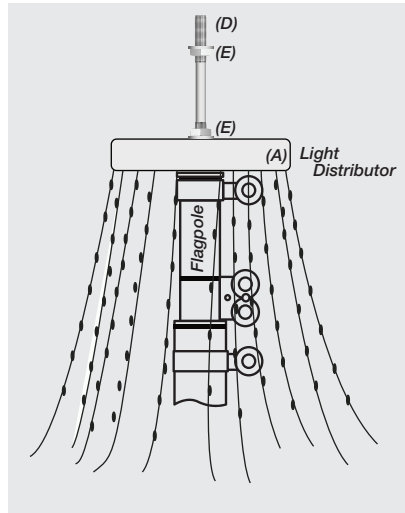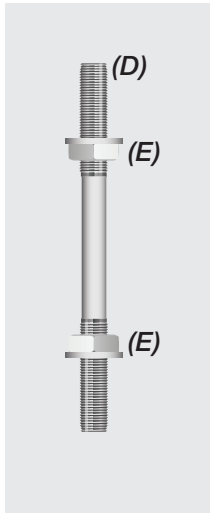


# INSTRUCTIONS


3 Install the Star Finial (C) onto the Star Bolt (D) and use Nut & Washer (E) to secure. \*\*Important\*\* Hand tighten ONLY!

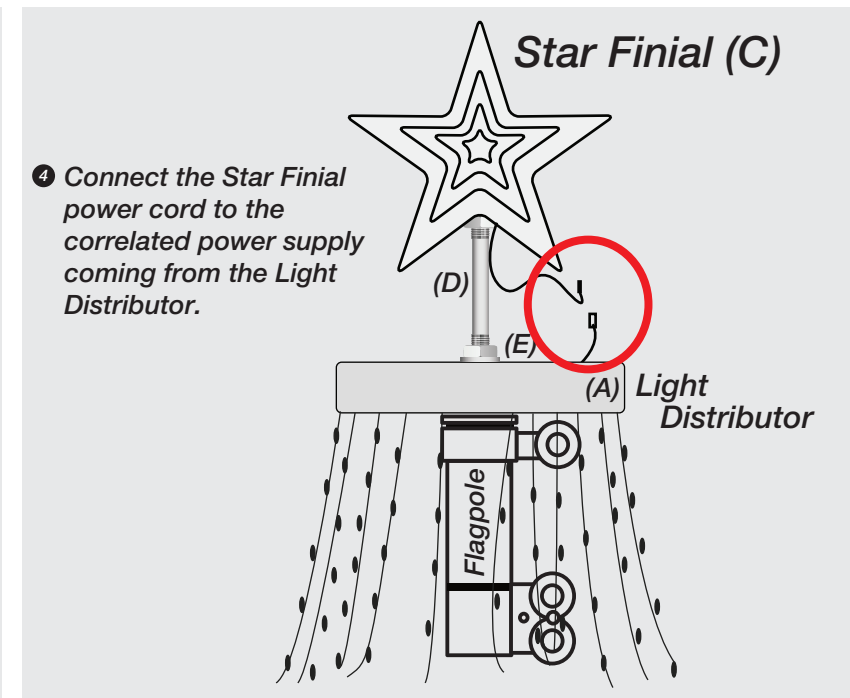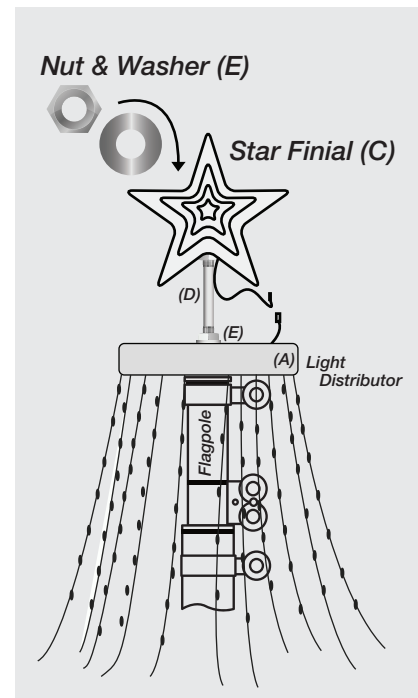




# INSTRUCTIONS

- 5 If you have a telescoping flagpole extend each section until the flagpole is at the desired height. If you have a Sectional Flagpole, with the help of another adult raise the flagpole and place into the ground sleeve with the Dream lights installed.
- 6 The Large zip-tie (H) can be used to secure the receiver to the flagpole. The receiver hangs from the Light Distributor and can be used to control the lights without the remote control. The button on the receiver functions like the Mode  button on the remote.

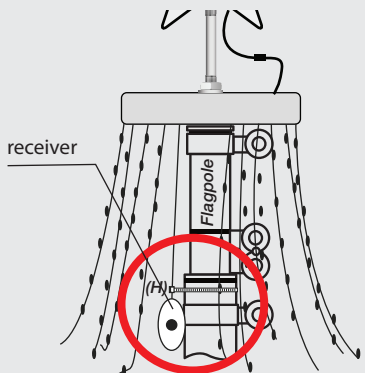

- 7 Untie and pull the strands away from the flagpole. Temporarily stake the strands to the ground using the included tie-down stakes (F). This will keep the strands from getting tangled. Raise or extend your flagpole. Re-adjust the stakes to the desired diameter and location. The included small zip-ties (G) can be used to ensure the light strands stay connected to the stakes if necessary.

You are able to choose the diameter of your Tree Light display. Below are some recommended distances according to flagpole height, however these are just suggestions.

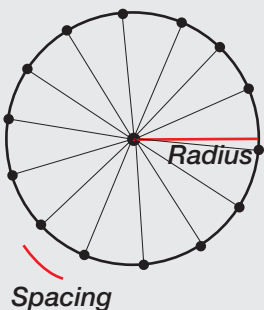

## **20' or less flagpoles**

9' radius

4' spacing between light strands

## **25' Flagpoles**

10' radius

4.5' spacing between light strands

## **30' Flagpoles**

11' radius

5' spacing between light strands

*\*\*These are approximate distances and may vary depending on sleeve depth and installed pole height.*



# ARRANGING LIGHTS

The Dream lights are designed to fit flagpoles up to 30' tall. If they are installed on a flagpole shorter than 30', there will be some of the strand left on the ground. The extra length can be bundled on the ground, arranged as a base around the pole or cut to a shorter length. More information on cutting the strand can be found on next page.

Here are a few ways you can arrange the extra strand length with your flagpole if you choose not to trim your Dream lights.

Examples:



Arranging in a circle



Arranging in X pattern



Don't stake the light strands too tightly to the ground. Staking the light strands too tight will put unnecessary stress on the light strands and make cause the strand to break as the flagpole moves.



# TRIMMING LIGHTS

As explained previously, when the kit arrives the strand length is set to fit a 30' Flagpole. You can use the lights at this length with any size flagpole and arrange any extra length of the strand as you choose. Or if you prefer the exact strand length for your size flagpole, you can trim the light strand to length. Please be very cautious when trimming the lights. Once they are cut they cannot be reconnected.

**CUT THE LIGHT STRANDS TO YOUR DESIRED LENGTH**  
- FITS FLAGPOLES UP TO 30' TALL



Before trimming the light strands, make sure you unplug the Dream lights from power.

Trimming the lights with the power connected can result in electrical shock and/or damage to the Dream lights.




Measure the lights carefully before cutting. Lights cannot be reconnected after trimming.

Service First is not responsible for errors made when trimming the lights.



# MODE CONTROL

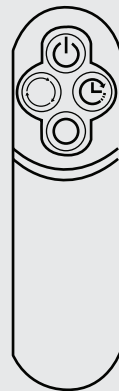

On/Off

Timer

Auto Mode

Mode

Mode

Each time the Mode button is pressed one of the 26 different colors or displays will show. The color or display will remain until the Mode button is pressed again.

Auto Mode

Pressing the Auto Mode button will begin a continuous cycle of all 26 colors and displays. The cycle will loop after the last display is shown.

Timer

By pressing the Timer button you can select between two different preset auto timers:

- Press Once- LED on controller will flash Red 3 times and the lights will stay lit for 4 hours and then remain off for 20 hours before turning on again.
- Press Twice LED on controller will flash Green 3 times and the lights will stay lit for 6 hours and then remain off for 18 hours before turning on again.
- Press 3x- LED on controller will flash White 3 times and this will CANCEL all timers previously set. You will then need to turn on/off the lights manually.


**\*\*If the Dream lights lose or are disconnected from power the timer will need to be restarted.**




# REMOTE CONTROL PAIRING

When your Dream lights arrive your remote should already be paired to the receiver. Occasionally the remote will need to be reconnected (paired) to the receiver again. If your remote is having trouble communicating with the receiver, try to pair the remote again.

1. Power off the Dream Lights
2. Press and Hold the Receiver button
3. Power on Dream lights while continuing to hold down the Receiver button
4. The lights will blink blue for 3 seconds
5. Release the receiver button
6. The lights will blink White
7. Press the Mode Button on the new controller
8. You are now paired. Test controller function

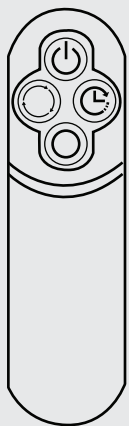

-  On/Off
-  Timer
-  Auto Mode
-  Mode

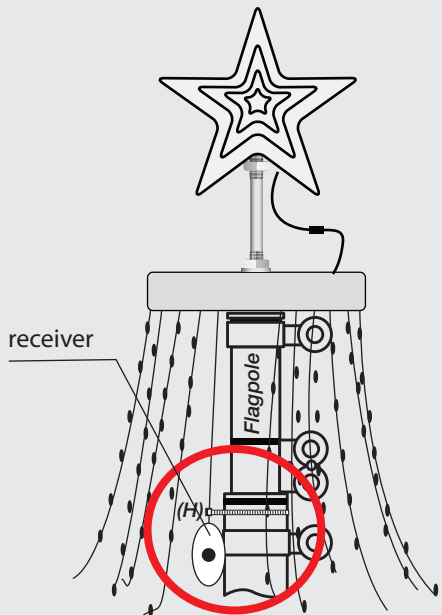


# INSTALLATION TIPS



When unboxing the Dream lights for the first time, exercise extreme caution while removing the lights and accessories from the protective shipping wrap. The dream lights have been carefully packed to avoid damage during shipping. Use caution when removing the packaging to avoid damaging the lights.

Once you have the distributor installed on your flagpole and you are beginning to unwind the light strands, Use masking tape to hold the individual strands in place until all the strands are unwound and you are ready to stake them to the ground. This will keep the strands from getting tangled as you raise your flagpole.

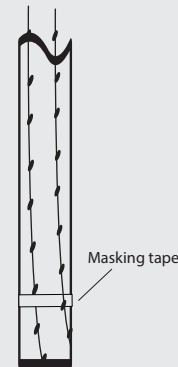

**Storing tips:** Be extremely cautious when removing your Dream light system from your flagpole. Wind each strand carefully and use included velcro straps to hold together. Insure the lights and all parts are completely dried. Package safely in the included storage case and store in dry location.

**Replacement Parts:** Each light strand is connected separately from the distributor. If for some reason an individual light or light strand is malfunctioning it can easily be replaced.

For replacement light strands and other parts, please contact Service First.

# INSTRUCTIONS



## Other Flagpole Accessories Available



**Flag Tether & Weight**

Allows you to fly a flag at half staff, reduces stress on the flagpole and gives you a nice clean look.



**Flagpole Adapter**

Allows you to keep an existing 2" ground sleeve while upgrading the flagpole to a 3" design. No tearing out concrete.



**Hitch Mount**

Take your flagpole on the go with our Hitch mount. Fits 2"- 3" Flagpoles



**Gold Eagle finial**

The perfect finial for your flagpole.




**Additional Flags**

We carry hundreds of different flags including state, political, military, sports teams and more.



**Solar Lights**

Achieve the perfect light for your flagpole without hard wiring a lighting system. Charges by day and automatically lights at night.



**Spot Light**

Ground mounted spot light



**Flash Collar**

Give your flagpole that perfect finishing look. Covers concrete base.

**Service First**

**VETERAN OWNED**

T: 385-985-7244

Multiple Patents Pending



[www.ServiceFirstProducts.com](http://www.ServiceFirstProducts.com)

e: [Contact@weareservicefirst.com](mailto:Contact@weareservicefirst.com)

Designed in the USA  
Made in P.R.C.