



VINTAVERB

Vintaverb Reverb Pedal

Owner's Manual

Precautions

Read Carefully Before Proceeding

Please keep this manual in a convenient place for future reference.

Power Supply

Always use a DC 9V, center negative, 200mA AC adapter. Use of an adapter other than that specified could damage the unit or cause malfunction and pose a safety hazard. Always connect the AC adapter to an AC outlet that supplies the rated voltage required by the adapter. Disconnect the AC adapter from the AC outlet when during lightning storms or not using the unit for an extended period.

Connections

Always turn off the power before connecting or disconnecting. Make sure to disconnect all cables and AC adapter before moving the unit. This will help prevent malfunction and damages.

Environment Considerations

Avoid using the unit in any of the following conditions that could cause malfunction:

- Extremely hot or cold places;
- Under direct sunlight;
- Magnetic fields;
- Near heaters and other heat sources;
- Sandy or dusty places;
- Places that are extremely humid or exposed to splashing water;
- Places with lots of vibrations.

Electrical Interference

Devices that are very susceptible to interference or that emits powerful electromagnetic waves (e.g. radios and TVs) should not be placed near this unit, as interference could occur. Electromagnetic interference could cause malfunction and could corrupt or destroy data.

Always operate this unit at a suitable distance from these devices.

Handling

Do not apply excessive force to the switches and other controls, exposing the unit to strong impacts, which could cause it to break.

Do not put foreign objects or liquids into the unit.

Never open the case or attempt to modify the product in any way since this can result in damage to the unit. Clean only with a soft, dry cloth.

Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and

- (2) this device must accept any interference received, including interference that may cause undesired operation.

Main Features

Donner Vintaverb is a multi-type reverb pedal packed with most useful functions and 7 kinds of world-class reverb algorithms ranging from essential to ambient. Not only provides vintage reverb sound like Room, Studio, Hall, Plate and Spring, but also includes Modulation Reverb and Distortion Reverb.

Basic reverb parameters help you setup your reverb sound as simple as possible. With Freeze function, it can sustain your reverb effect whenever you want. Stereo inputs and outputs offer you awesome and huge reverb tone. Trail ON Mode (Buffer Bypass) and True Bypass Mode provide you a choice to decide keeping reverb tail or keeping your tone characters. There is vast creative potential in the Donner Vintaverb reverb pedal.

- 7 kinds of world-class reverb effect ranging from essential to ambient, includes Room, Studio, Hall, Plate, Spring, Mod and Dsverb.
- Stereo inputs and outputs added flexibility to fit any kinds of setup.
- Easy to setup your own reverb tone with MIX, DECAY, TONE and Predelay parameters.
- Hold on reverb sound as long as you want via Freeze function.
- Switchable True Bypass Mode/Trail ON Mode for pedalboard flexibility.

Panel Layout



- 1.DC IN: Input for power supply, use a 9V DC regulated power supply 200mA, center pin negative.
- 2.Mix knob: Adjusts how much reverb is mixed with the dry signal. When this knob is at the minimum position, the output is only your dry signal. As the knob is turned up, the reverb output increases in volume. The dry signal and reverb are balanced (1:1) at 12 o'clock. Turned past 12 o'clock, the dry signal decreases in volume. When the knob is at the maximum position, only the reverb is output.
- 3.Decay knob: Adjust the length of the reverb. As this knob is turned clockwise, the reverb time gets longer and longer.
- 4.Tone knob: Adjust the brightness of the reverb. As this knob is turned clockwise, the sound of the reverb gets brighter.
- 5.Predelay switch: Adjust the time between the direct sound and the reverb. Short is 20ms, Long is 40ms. Selecting a longer pre delay can help maintain presence and clarity.

- 6.Type Selector: Select the type of reverb including Room, Studio, Hall, Plate, Spring, Mod Modulation Reverb and Dsverb Distortion Reverb.
- 7.Input jack L (Mono): 1/4" mono audio jack left input for connecting to the input device or instrument. When the mono input jack L is connected, it can output stereo signals.
- 8.Input jack R: 1/4" mono audio jack right input for connecting to the input device or instrument.
- 9.Output jack L (Mono): 1/4" mono audio jack of left output, effect output for connection to amp or other devices.
- 10.Output jack R: 1/4" mono audio jack of right output, effect output for connection to amp or other devices.
- 11.LED: Indicates the effect on/off, Freeze Mode and Bypass Mode.
- 12.Footswitch: Engages and disengages the effect. The footswitch also controls the Freeze function and controls the Trail ON Mode or True Bypass Mode.

- 1.Unplug the power cable from your pedal.
- 2.Press and keep holding the footswitch.
- 3.Insert the DC power supply plug.
- 4.The Led will flash to indicate what kinds of mode you are using. Flash once means Trail ON Mode. Flash twice means True Bypass Mode.
- 5.Repeat the steps above can switch between Trail ON Mode or True Bypass Mode.


Setup Instruction

- 1 Connect the power, use a 9V DC regulated power supply more than 200mA, center pin negative.
- 2 Connect your instrument to the input jack on the right side of the pedal with an instrument cable
- 3 Connect the output jack on the left side of the pedal to your amplifier or other pedals
- 4 Press the On/Off button, adjust the parameters and reverb type to set your favorite tone.
- 5 Enjoy your playing.

Notes: For best results it is recommended to put the 'Vintaverb' after all the pedal in your effects chain, or put it in your amp's FX loop.



Notes:Any specification's update will not be amended in this manual.

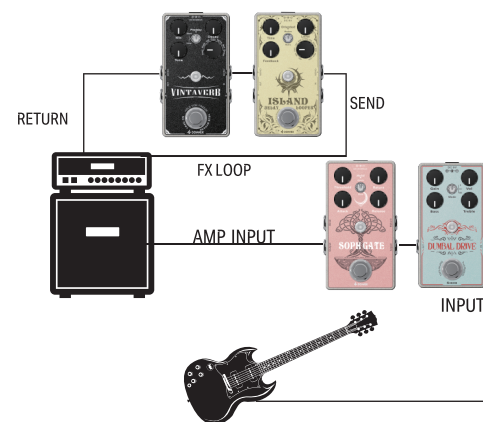

Specification

Input	1/4" mono audio jack X2
Output	1/4" mono audio jack X2
Input Impedance	1Meg Ohms
Output Impedance	100 Ohms
Bypass Option	True Bypass / Buffered Bypass
Power	AC adapter 9V DC
Requirements	center negative.
Current Draw	150mA
Dimensions	113.5mm(D)*64mm(W)*52.6mm(H)
Weight	260g
Accessories	Owner's Manual, Stickers.

Recommended Setting



Dear Customer,

Thank you for ordering from Donner! This is Donner Customer Service Team. After received the package, please test and see if there's any problem. Any problem please feel free to contact us by amazon (the order page) or the email address below.



Welcome to Donner

Gmail : donnerdeal@gmail.com
Website: https://www.donnerdeal.com/

Thank you again for choosing Donner! Please enjoy making your own music.

Best Regards
Donner Customer Service Team.