


Traus SIP10

Advanced Implant Engine

- 9 programmable memories
- Automatic overload protection function
- Displays actual RPM and torque during operation to help maintain the proper working condition
- Motor auto-calibration function
- Ergonomic foot controller
- Optic function



Option

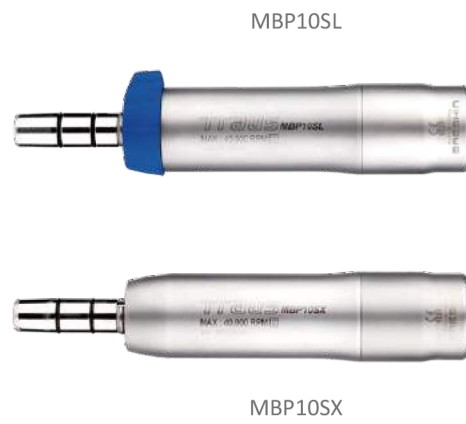

Specification

Control Box

Input	AC 100-120 V, 220-240 V
Output	230 W
Fuse	5 A / 2 A
Frequency	50/60 Hz
Maximum Pump	Max. 90 ± 20% mL / min
Dimensions (mm)	W 233 X D 269 X H 120
Weight	2.8kg

Contra Angle Handpiece

	CRB26LX	CRB26XX	CRB27LX	CRB27XX
Optic	Optic	Non-Optic	Optic	Non-Optic
Gear Ratio	20 : 1	20 : 1	32 : 1	32 : 1
Max. Torque	70 N·cm	70 N·cm	80 N·cm	80 N·cm
Max. RPM	2,000	2,000	1,250	1,250
Min. RPM	15	15	10	10
Weight	82g	84g	82g	84g

Foot Controller

